

LT3476EUHF Quadruple High Power LED Driver in Buck Mode

DESCRIPTION

WARNING!

Do not look directly at operating LED.

This circuit produces light that can damage eyes.


Demonstration circuit 976 is a Quadruple High Power LED Driver in Buck Mode featuring the LT3476EUHF. The LT3476 is a quad output DC/DC converter designed to operate as a current source for driving high current LEDs. On the demo circuit, the default current for each output channel is 350mA but that can be adjusted to up to 1.05A via resistor dividers at the VADJ pins. The output current should not exceed the rated current of the LEDs used. If 1W LEDs, such as the Lumileds Luxeon LEDs, are used, 350mA current is the maximum. 1A output current is reserved for 3W LEDs, such as Luxeon III. The LED current thermal de-rating should be considered to protect the LEDs. The maximum LED string voltage the demo circuit can drive is limited by the duty cycle and the input voltage of the LT3476. The demo circuit default switching frequency is 1MHz. At 1MHz, the maximum duty cycle is 84% (MIN). Lower switching

frequency results in higher maximum duty cycle. The input voltage is limited by the CAP pin over-voltage protection threshold. As a result, each channel of the demo circuit can drive up to 27V total LED voltage. Adjustable switching frequency allows optimization of the efficiency and the external component size. At 1MHz, 96% efficiency can be achieved at 1A without sacrificing the solution size.

Each of the four regulators on the demo circuit is independently operated. The PWM dimming feature of the LT3476 allows True Color PWM dimming with the dimming ratio up to 1000:1. Additional analog dimming is possible.

The LT3476 datasheet gives a complete description of the part, operation and application information. The datasheet must be read in conjunction with this quick start guide for working on or modifying the demo circuit 976.

Design files for this circuit are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

PERFORMANCE SUMMARY Specifications are at TA = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
PV _{IN}	Power Input Supply				33	V
V _{IN}	Chip Bias Input Supply		2.8		16	V
V _{LED}	Output LED Voltage, per Output	PV _{IN} = 33V, I _{LED} = 350mA			27	V
I _{LED}	Output LED Current, per Output	R2, R25, R27, R29 = 66.5K		350		mA
I _{LED}	Output LED Current, per Output	R2, R25, R27, R29 = 0	1013	1050	1087	mA
F _{SW}	Switching Frequency	R11 = 21K	0.85	1	1.15	MHz
η	Conversion Efficiency	I _{LED} = 350mA		94		%
η	Conversion Efficiency	I _{LED} = 1050mA		96		%
P _{OUT}	Maximum Total Output Power	I _{LED} = 1050mA			100	W
PWM _D	PWM Dimming Ratio	PWM Frequency = 100Hz			1000:1	

QUICK START PROCEDURE

Demonstration circuit 976 is easy to set up to evaluate the performance of the LT3476EUHF. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. With power off, connect an input power supply to VIN and GND. The maximum rating is 16V. To achieve highest efficiency, a low voltage supply, such as 3.3V or 5V, is recommended.
2. With power off, connect a second input power supply to PVIN and GND. The maximum PVIN is 33V.
3. With power off, connect PWM1, PWM2, PWM3, PWM4 to VIN. If an output n is not used, the PWM n can be left unconnected.
4. With power off, connect a LED (in series) string to an output channel. Connect the anode of the first LED to the LED $n+$. Connect the cathode of the last LED to the LED $n-$. All four channels can operate simultaneously or individually.
5. Turn on PVIN power supply.
6. Turn on VIN power supply.
7. Check for the proper LED current and LED string voltage.
NOTE. If there is no output, turn off the power supplies. Check all connections.
8. Once the proper output current/voltage are established, adjust the parameters within the operating range and observe the output current regulation, efficiency and other parameters.
9. To observe PWM dimming, turn off all power supplies. Disconnect PWM n from VIN. Connect PWM n to a pulse generator. Then turn on PVIN, the PWM pulse generator and VIN.
10. For even faster LED current turn-off, remove R20, R21, R22, R23 and repeat step 9.


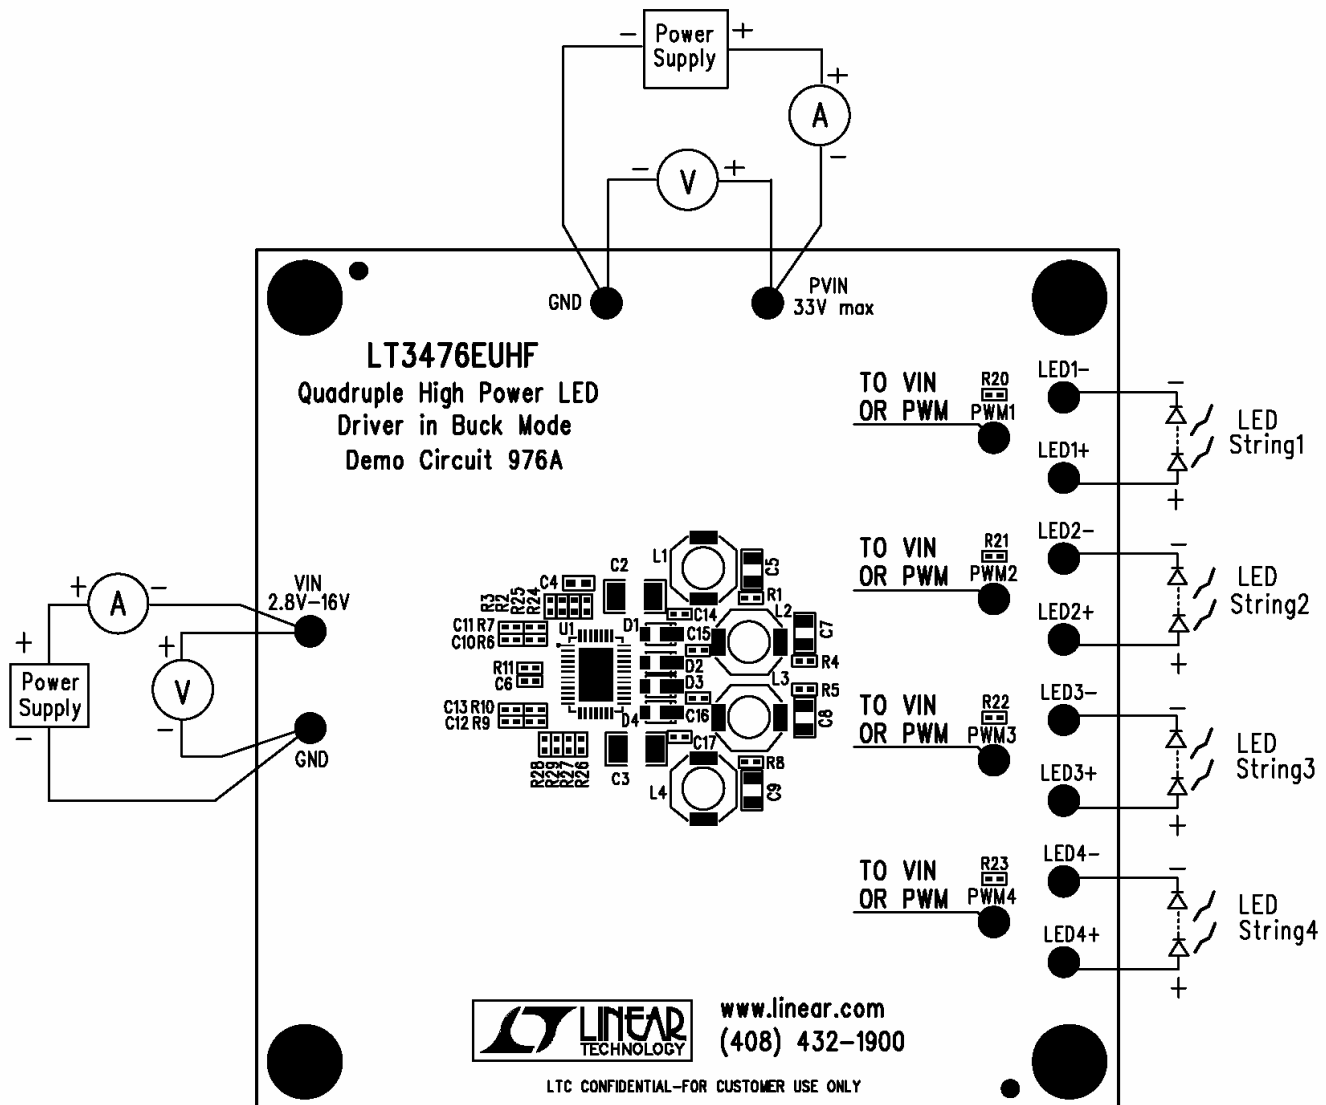


Figure 1. Proper Measurement Equipment Setup




** Remove for faster LED turn-off.

CUSTOMER NOTICE		CONTRACT NO.	
LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE. PLEASE REFER TO CONTRACT LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSISTANCE.		THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.	
DATE	APPROVALS	DATE	APPROVALS
8/22/06	HELEN	8/22/06	HELEN
CHECKED	DESIGNED	CHECKED	DESIGNED
APPROVED	ENGINEER	APPROVED	ENGINEER
8/22/06	Water Esh	8/22/06	Water Esh
DESIGNER	DESIGNER	DESIGNER	DESIGNER
TITLE		TITLE	
LT3476EUHF		LT3476EUHF	
Quadraple High Power LED Driver in Buck Mode		Quadraple High Power LED Driver in Buck Mode	
SIZE	CAGE CODE	SIZE	CAGE CODE
DC976A	DWG NO	DC976A	DWG NO
SCALE	FILE NAME	SCALE	FILE NAME
1		1	
SHEET		SHEET	
1		1	

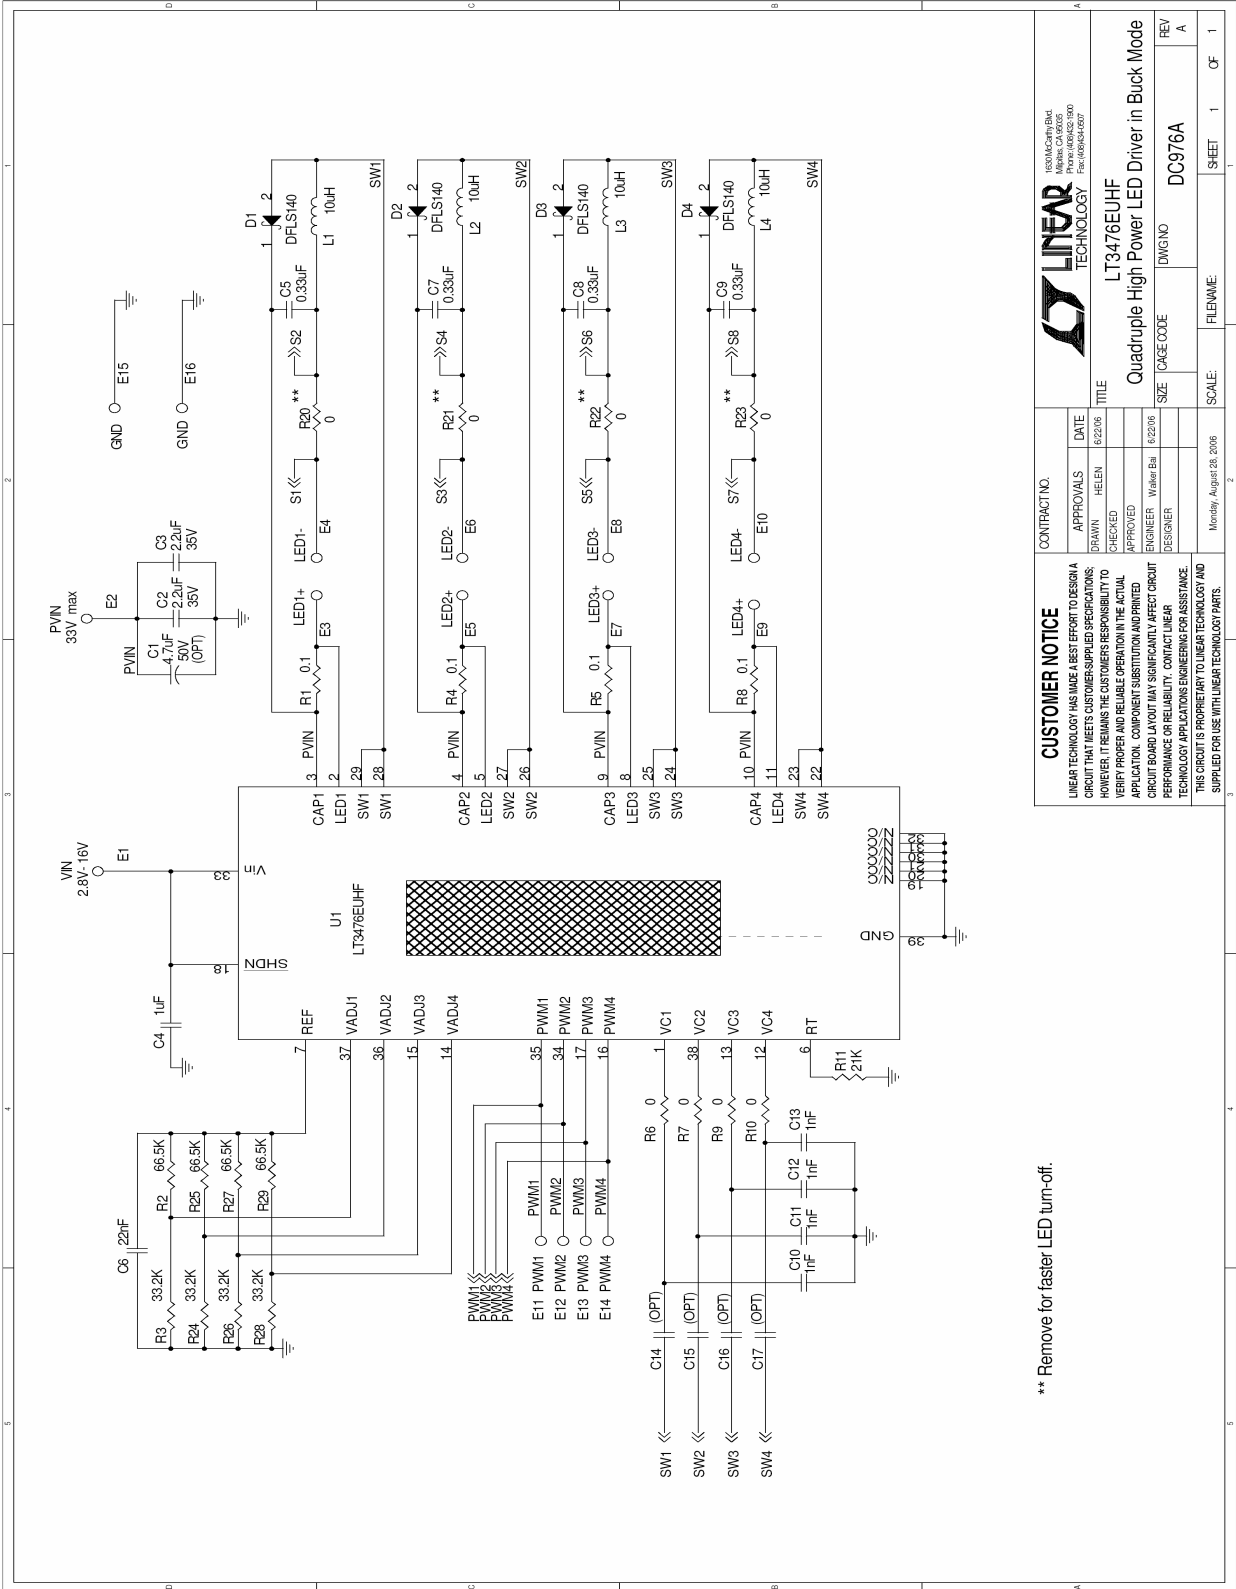

16300 Macomber Blvd
 Milpitas, CA 95035
 408.253.1600
 Fax: 408.253.1602

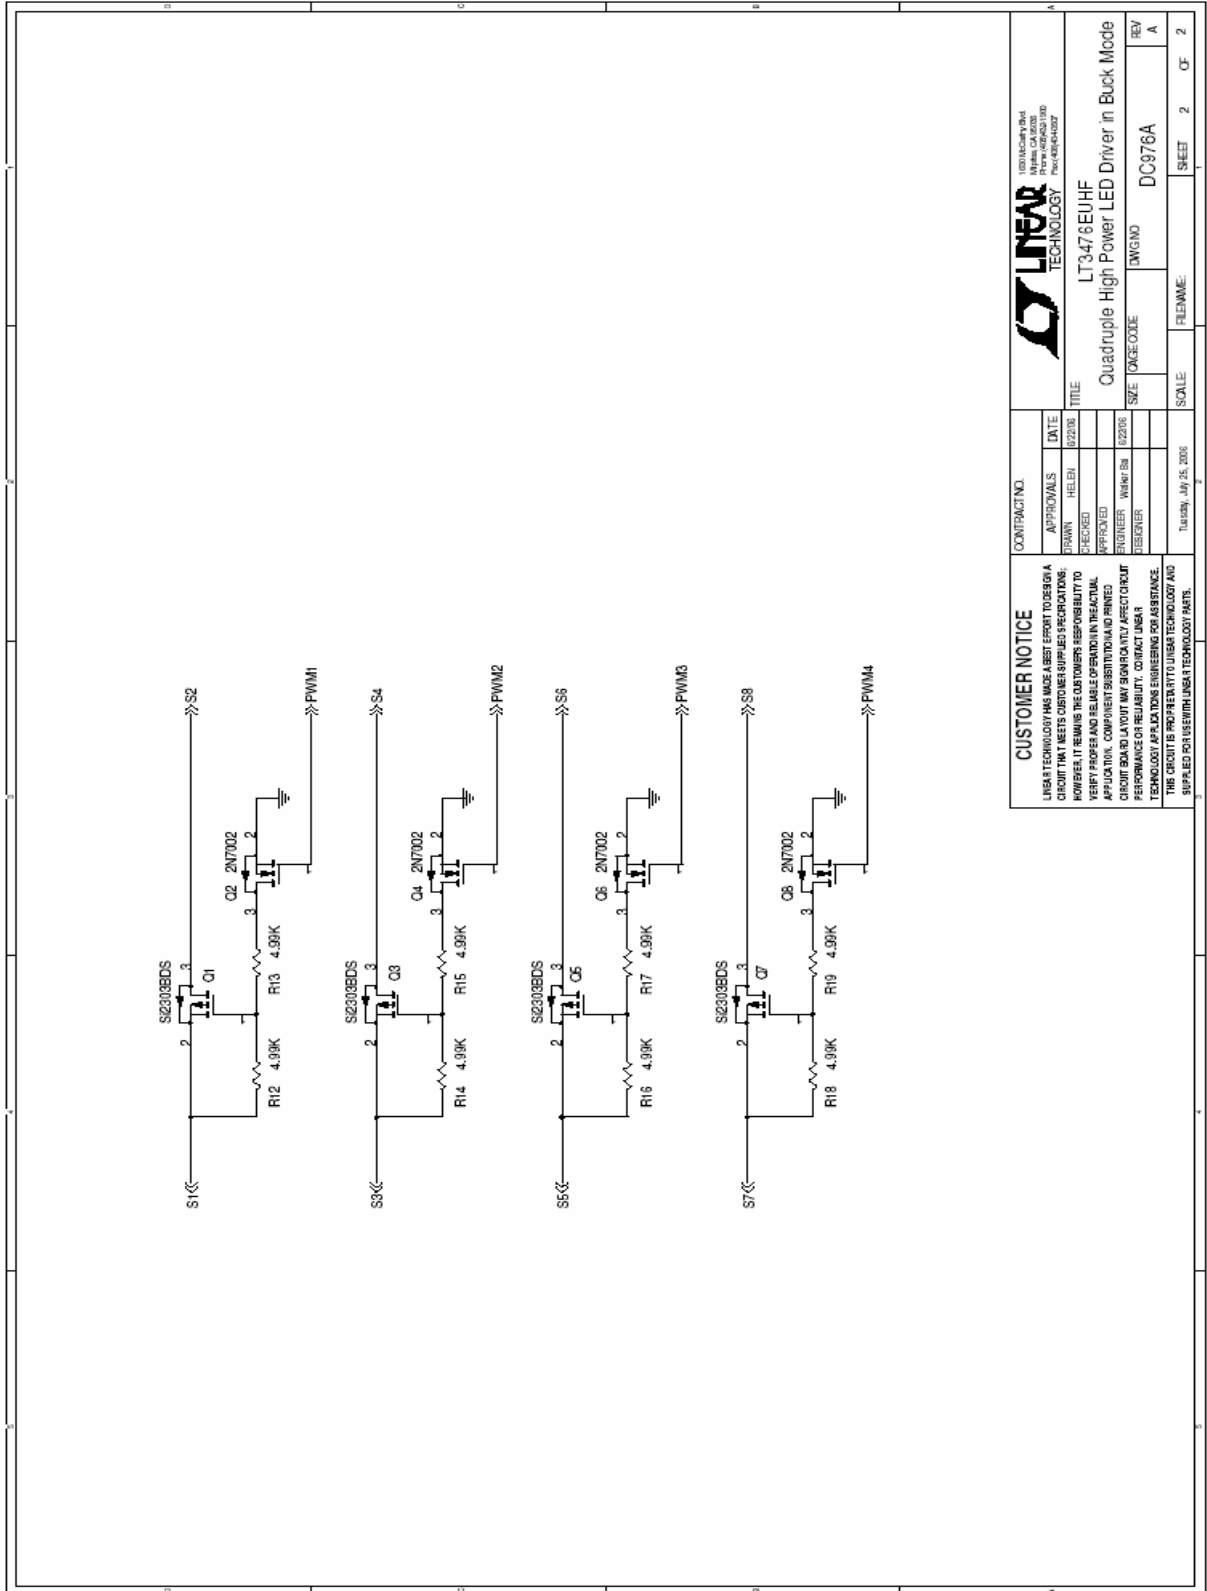

CUSTOMER NOTICE LINEAR TECHNOLOGY HAS MADE BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER SUPPLIED SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PINNED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SHIP-PAKED FOR USE WITH LINEAR TECHNOLOGY PARTS.		CONTRACT NO. APPROVALS DRAWN: HELEN CHECKED: APPROVED: ENGINEER: WANG, SM DESIGNER:	DATE 02/20/08	LINEAR TECHNOLOGY 1001 California Street Fremont, CA 94539-1100 Phone: 415-444-0007
TITLE LT3476EUHF Quadruple High Power LED Driver in Buck Mode		SCALE 1:1	REV A	SIZE DWGNO: DC978A
DATE Tuesday, July 25, 2008		SCALE 1:1	REV A	SIZE DWGNO: DC978A
DATE Tuesday, July 25, 2008		SCALE 1:1	REV A	SIZE DWGNO: DC978A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[MIC2870YFT EV](#) [ADP8860DBCP-EVALZ](#) [LM3404MREVAL](#) [ADM8843EB-EVALZ](#) [TDGL014](#) [ISL97682IRTZEVALZ](#) [LM3508TLEV](#)
[EA6358NH](#) [MAX16826EVKIT](#) [MAX16839EVKIT+](#) [TPS92315EVM-516](#) [MAX1698EVKIT](#) [MAX6956EVKIT+](#) [OM13321,598](#) [DC986A](#)
[DC909A](#) [DC824A](#) [STEVAL-LLL006V1](#) [IS31LT3948-GRLS4-EB](#) [104PW03F](#) [PIM526](#) [PIM527](#) [MAX6946EVKIT+](#) [MAX20070EVKIT#](#)
[MAX20090BEVKIT#](#) [MAX20092EVSYS#](#) [PIM498](#) [AP8800EV1](#) [ZXLD1370/1EV4](#) [MAX6964EVKIT](#) [MAX25240EVKIT#](#)
[MAX25500TEVKITC#](#) [MAX77961BEVKIT06#](#) [1216.1013](#) [TPS61176EVM-566](#) [TPS61197EVM](#) [TPS92001EVM-628](#) [1270](#) [1271.2004](#)
[1272.1030](#) [1273.1010](#) [1278.1010](#) [1279.1002](#) [1279.1001](#) [1282.1000](#) [1293.1900](#) [1293.1800](#) [1293.1700](#) [1293.1500](#) [1293.1100](#)