

QUADRUPLE OPERATIONAL AMPLIFIERS

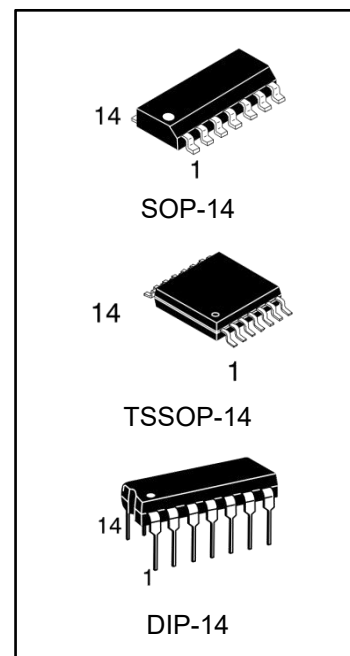
DESCRIPTION

The LM324 consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op amp circuits.

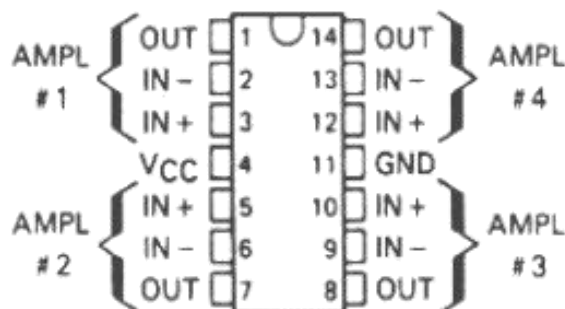
FEATURES

- Wide range of supply voltages
- Low supply current drain independent of supply voltage
- Low input biasing current
- Low input offset voltage and offset current
- Input common-mode voltage range includes ground
- Differential input voltage range equal to the power supply voltage
- DC voltage gain 100 V/ mV Typ
- Internally frequency compensation



ORDERING INFORMATION

| DEVICE | Package Type | MARKING | Packing | Packing Qty |
|-----------|--------------|---------|---------|--------------|
| LM324PG | DIP-14 | LM324 | TUBE | 1000pcs/Box |
| LM324DRG | SOP-14 | LM324 | REEL | 2500pcs/Reel |
| LM324PWRG | TSSOP-14 | LM324 | REEL | 2500pcs/Reel |

PACKAGE INFORMATION


DIP-14/SOP-14/TSSOP-14

ELECTRICAL CHARACTERISTICS

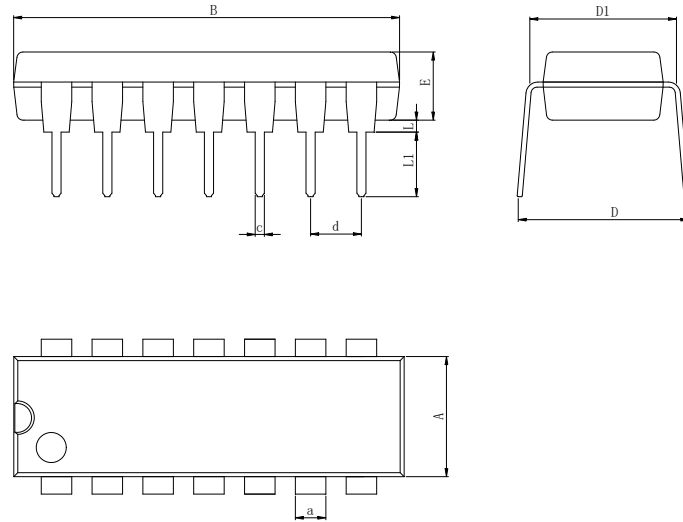
 at specified free-air temperature, $V_{CC} = 5V$ (unless otherwise noted)

| PARAMETER | TEST CONDITIONS* | LM324 | | | UNIT | |
|---|--|------------------------|----------------------------|------|------------------|------|
| | | MIN | TYP | MAX | | |
| V _{IO} Input offset voltage | V _{CC} = 5V to MAX, V _{IC} = V _{ICRmin} , V _O = 1.4V | 25°C | 3 | 7 | mV | |
| | | Full temperature range | | 9 | | |
| α V _{IO} Average temperature coefficient of input offset voltage | | Full temperature range | 7 | | $\mu V/^\circ C$ | |
| I _{IO} Input offset current | V _O = 1.4V | 25°C | 2 | 50 | nA | |
| | | Full temperature range | | 150 | | |
| α I _{IO} Average temperature coefficient of input offset current | | Full temperature range | 10 | | pA/°C | |
| I _{IB} Input bias current | V _O = 1.4V | 25°C | -20 | -250 | nA | |
| | | Full temperature range | | -500 | | |
| V _{ICR} Common-mode input voltage range | V _{CC} = 5V to MAX | 25°C | 0 to V _{CC} - 1.5 | | V | |
| | | Full temperature range | 0 to V _{CC} - 2 | | | |
| V _{OH} High-level output voltage | RL = 2 k Ω | 25°C | V _{CC} - 1.5 | | V | |
| | V _{CC} = MAX, RL = 2k Ω | Full temperature range | 26 | | | |
| | V _{CC} = MAX, RL = 10 k Ω | Full temperature range | 27 | 28 | | |
| V _{OL} Low-level output voltage | RL = 10 k Ω | Full temperature range | | 5 | 20 | mV |
| AVD | V _{CC} = 15 V, | 25°C | 25 | 100 | | V/mV |

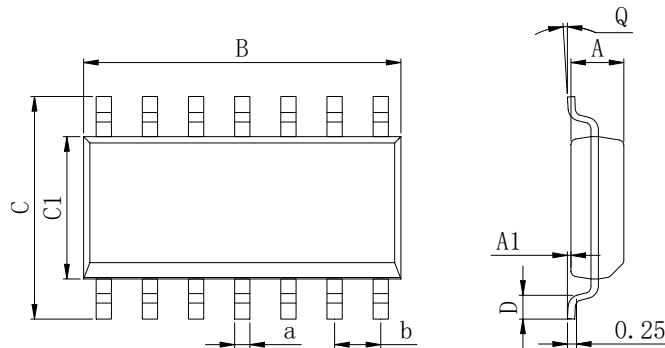
| | | | | | | |
|--|---|------------------------|-----|----------|----------|---------|
| Large-signal differential voltage amplification | $V_o=1V$ to $11V$, $R_L \geq 2k\Omega$ | Full temperature range | 15 | | | |
| CMRR Common-mode rejection ratio | $V_{cc} = 5V$ to MAX, $V_{IC} = V_{ICR}$ min | $25^\circ C$ | 65 | 80 | | dB |
| kSVR Supply voltage rejection ratio ($\Delta V_{cc}/\Delta V_{IO}$) | $V_{cc} = 5V$ to MAX | $25^\circ C$ | 65 | 100 | | dB |
| V_{o1}/V_{o2} Crosstalk attenuation | $f=1kHz$ to $20kHz$ | $25^\circ C$ | | 120 | | dB |
| IO Output current | $V_{cc} = 15V$, $V_{ID}=1V, V_o=0$ | $25^\circ C$ | -20 | -30 | | mA |
| | | Full temperature range | -10 | | | |
| | $V_{cc} = 15V$, $V_{ID} = -1V, V_o=15V$ | $25^\circ C$ | 10 | 20 | | mA |
| | | Full temperature range | 5 | | | |
| | $V_{ID} = -1V$, $V_o = 200mV$ | $25^\circ C$ | 12 | 30 | | μA |
| I_{os} Short-circuit output current | V_{cc} at $5V$, GND at $-5V, V_o=0$ | $25^\circ C$ | | ± 40 | ± 60 | mA |
| I_{cc} Supply current (four amplifiers) | $V_o = 2.5V$, No load | Full temperature range | | 1.5 | 2.4 | mA |
| | $V_{cc} = MAX$, $V_o = 0.5V_{cc}$, No load | Full temperature range | | 1.1 | 3 | |

* All characteristics are measured under open loop conditions with zero common-mode input voltage unless otherwise specified.

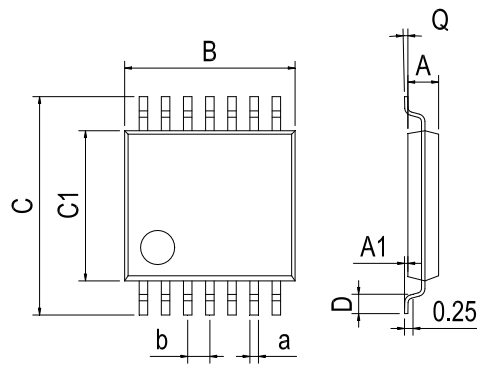
"MAX" V_{cc} for testing purposes is $30V$. Operating temperature $-40 \sim 85^\circ C$, MAX Junction temperature $+125^\circ C$.

PHYSICAL DIMENSIONS
DIP-14

Dimensions In Millimeters(DIP-14)

| Symbol: | A | B | D | D1 | E | L | L1 | a | c | d |
|---------|------|-------|------|------|------|------|------|------|------|----------|
| Min: | 6.10 | 18.94 | 8.10 | 7.42 | 3.10 | 0.50 | 3.00 | 1.50 | 0.40 | 2.54 BSC |
| Max: | 6.68 | 19.56 | 10.9 | 7.82 | 3.55 | 0.70 | 3.60 | 1.55 | 0.50 | |

SOP-14

Dimensions In Millimeters(SOP-14)

| Symbol: | A | A1 | B | C | C1 | D | Q | a | b |
|---------|------|------|------|------|------|------|----|------|----------|
| Min: | 1.35 | 0.05 | 8.55 | 5.80 | 3.80 | 0.40 | 0° | 0.35 | 1.27 BSC |
| Max: | 1.55 | 0.20 | 8.75 | 6.20 | 4.00 | 0.80 | 8° | 0.45 | |

TSSOP-14


| Dimensions In Millimeters(TSSOP-14) | | | | | | | | | |
|-------------------------------------|------|------|------|------|------|------|----|------|----------|
| Symbol: | A | A1 | B | C | C1 | D | Q | a | b |
| Min: | 0.85 | 0.05 | 4.90 | 6.20 | 4.30 | 0.40 | 0° | 0.20 | 0.65 BSC |
| Max: | 0.95 | 0.20 | 5.10 | 6.60 | 4.50 | 0.80 | 8° | 0.25 | |

REVISION HISTORY

| DATE | REVISION | PAGE |
|-----------|---|------|
| 2019-10-5 | New | 1-7 |
| 2023-8-29 | Update encapsulation type、 Updated DIP-14 dimension | 1、 4 |

IMPORTANT STATEMENT:

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Operational Amplifiers - Op Amps](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[430227FB](#) [LT1678IS8](#) [NCV33202DMR2G](#) [NJM324E](#) [M38510/13101BPA](#) [NTE925](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#)
[AZV358MMTR-G1](#) [SCY33178DR2G](#) [NCV20034DR2G](#) [NTE778S](#) [NTE871](#) [NTE937](#) [NJU7057RB1-TE2](#) [SCY6358ADR2G](#)
[NJM2904CRB1-TE1](#) [UPC4570G2-E1-A](#) [UPC4741G2-E1-A](#) [NJM8532RB1-TE1](#) [EL2250CS](#) [EL5100IS](#) [EL5104IS](#) [EL5127CY](#) [EL5127CYZ](#)
[EL5133IW](#) [EL5152IS](#) [EL5156IS](#) [EL5162IS](#) [EL5202IY](#) [EL5203IY](#) [EL5204IY](#) [EL5210CS](#) [EL5210CYZ](#) [EL5211IYE](#) [EL5220CY](#)
[EL5223CLZ](#) [EL5223CR](#) [EL5224ILZ](#) [EL5227CLZ](#) [EL5227CRZ](#) [EL5244CS](#) [EL5246CS](#) [EL5246CSZ](#) [EL5250IY](#) [EL5251IS](#) [EL5257IS](#)
[EL5260IY](#) [EL5261IS](#) [EL5300IU](#)