


### Features

- 5000W peak pulse power capability with a 10/1000 us waveform, repetition rate (duty cycle): 0.01%.
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time from 0V to VBR, typically less than 1 ps for uni-directional & 5 ns for bi-directional types.
- Glass passivated chip junction.
- Lead-free parts meet RoHS requirements.
- Compliant to Halogen-free.

### Mechanical data

- Epoxy: UL94-V0 rated flame retardant
- Case : Molded plastic, DO-214AB / SMC
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any

### Package outline

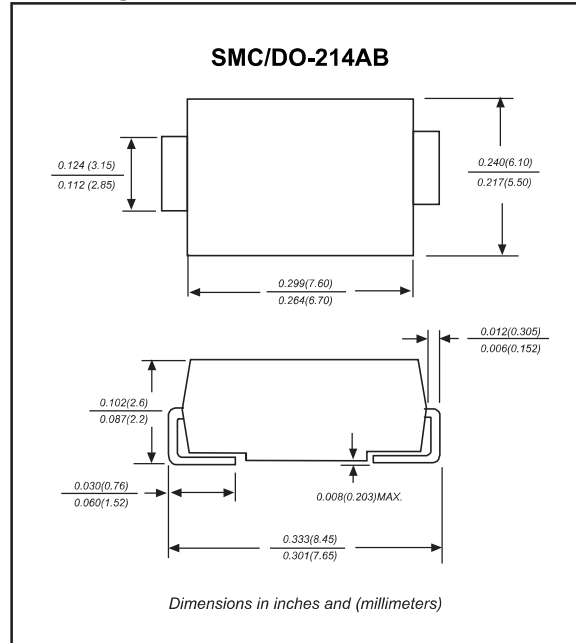

### Maximum ratings (AT $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	Value	UNIT
Peak Power Dissipation	with a 10/1000 us waveform, Note 1, 2 & Fig. 1	$P_{PPM}$	5000	W
Peak Pulse current	with a 10/1000 us waveform	$I_{PPM}$	See Table 1	A
Peak Forward Surge Current	8.3ms Single Half Sine-Wave, Note 3	$I_{FSM}$	300	A
Operating Temperature range		$T_J$	-55 ~ +150	$^\circ\text{C}$
Storage Temperature range		$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

- Note 1. Non-repetitive current pulse, per Fig. 3 and derated above  $T_A=25^\circ\text{C}$  per Fig. 2  
 2. Mounted on copper pad area of 0.31"x0.31" (8.0x8.0 mm) per Fig 5  
 3. Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum  
 4.  $V_f < 3.5\text{V}$  for devices of  $V_{BR} < 200\text{V}$  and  $V_f < 5.0\text{V}$  for devices of  $V_{BR} > 201\text{V}$ .

### Electrical Specification @ Tamb 25°C

TECHNOLOGIES 5.0SMDJ SERIES		Device Marking Code		Breakdown voltage VBR @ IT			Maximum Reverse Leakage IR(μA) @VRWM	Working Peak Reverse Voltage VRWM (Volts)	Maximum Reverse Surge Current Ipp(A) @10x1000us sinewave	Maximum Clamping Voltage Vc (Volts) @Ipp
Uni-polar	Bi-polar	Uni	Bi	Min (V)	Max (V)	IT (mA)				
5.0SMDJ11	5.0SMDJ11C	5PDW	5BDW	12.2	14.9	1	800	11	251.2	20.1
5.0SMDJ11A	5.0SMDJ11CA	5PDX	5BDX	12.2	13.5	1	800	11	277.5	18.2
5.0SMDJ12	5.0SMDJ12C	5PDY	5BDY	13.3	16.3	1	800	12	229.5	22.0
5.0SMDJ12A	5.0SMDJ12CA	5PDZ	5BDZ	13.3	14.7	1	800	12	253.8	19.9
5.0SMDJ13	5.0SMDJ13C	5PED	5BED	14.4	17.6	1	500	13	212.2	23.8
5.0SMDJ13A	5.0SMDJ13CA	5PEE	5BEE	14.4	15.9	1	500	13	234.9	21.5
5.0SMDJ14	5.0SMDJ14C	5PEF	5BEF	15.6	19.1	1	200	14	195.7	25.8
5.0SMDJ14A	5.0SMDJ14CA	5PEG	5BEG	15.6	17.2	1	200	14	217.7	23.2
5.0SMDJ15	5.0SMDJ15C	5PEH	5BEH	16.7	20.4	1	100	15	187.7	26.9
5.0SMDJ15A	5.0SMDJ15CA	5PEK	5BEK	16.7	18.5	1	100	15	207.0	24.4
5.0SMDJ16	5.0SMDJ16C	5PEL	5BEL	17.8	21.8	1	50	16	175.3	28.8
5.0SMDJ16A	5.0SMDJ16CA	5PEM	5BEM	17.8	19.7	1	50	16	194.2	26.0
5.0SMDJ17	5.0SMDJ17C	5PEN	5BEN	18.9	23.1	1	20	17	165.6	30.5
5.0SMDJ17A	5.0SMDJ17CA	5PEP	5BEP	18.9	20.9	1	20	17	183.0	27.6
5.0SMDJ18	5.0SMDJ18C	5PEQ	5BEQ	20.0	24.4	1	10	18	156.8	32.2
5.0SMDJ18A	5.0SMDJ18CA	5PER	5BER	20.0	22.1	1	10	18	172.9	29.2
5.0SMDJ19	5.0SMDJ19C	5PES	5BES	21.1	25.8	1	10	19	148.5	34.0
5.0SMDJ19A	5.0SMDJ19CA	5PET	5BET	21.1	23.3	1	10	19	164.1	30.8
5.0SMDJ20	5.0SMDJ20C	5PEU	5BEU	22.2	27.1	1	5.0	20	141.1	35.8
5.0SMDJ20A	5.0SMDJ20CA	5PEV	5BEV	22.2	24.5	1	5.0	20	155.9	32.4
5.0SMDJ22	5.0SMDJ22C	5PEW	5BEW	24.4	29.8	1	5.0	22	128.2	39.4
5.0SMDJ22A	5.0SMDJ22CA	5PEX	5BEX	24.4	26.9	1	5.0	22	142.3	35.5
5.0SMDJ24	5.0SMDJ24C	5PEY	5BEY	26.7	32.6	1	5.0	24	117.4	43.0
5.0SMDJ24A	5.0SMDJ24CA	5PEZ	5BEZ	26.7	29.5	1	5.0	24	129.8	38.9
5.0SMDJ26	5.0SMDJ26C	5PFD	5BFD	28.9	35.3	1	5.0	26	108.4	46.6
5.0SMDJ26A	5.0SMDJ26CA	5PFE	5BFE	28.9	31.9	1	5.0	26	120.0	42.1
5.0SMDJ28	5.0SMDJ28C	5PFF	5BFF	31.1	38.0	1	5.0	28	101.0	50.0
5.0SMDJ28A	5.0SMDJ28CA	5PFG	5BFG	31.1	34.4	1	5.0	28	111.2	45.4
5.0SMDJ30	5.0SMDJ30C	5PFH	5BFH	33.3	40.7	1	5.0	30	94.4	53.5
5.0SMDJ30A	5.0SMDJ30CA	5PFK	5BFK	33.3	36.8	1	5.0	30	104.3	48.4
5.0SMDJ33	5.0SMDJ33C	5PFL	5BFL	36.7	44.9	1	5.0	33	85.6	59.0
5.0SMDJ33A	5.0SMDJ33CA	5PFM	5BFM	36.7	40.6	1	5.0	33	94.7	53.3
5.0SMDJ36	5.0SMDJ36C	5PFN	5BFN	40.0	48.9	1	5.0	36	78.5	64.3
5.0SMDJ36A	5.0SMDJ36CA	5PFP	5BFP	40.0	44.2	1	5.0	36	86.9	58.1
5.0SMDJ40	5.0SMDJ40C	5PFQ	5BFQ	44.4	54.3	1	5.0	40	70.7	71.4
5.0SMDJ40A	5.0SMDJ40CA	5PFR	5BFR	44.4	49.1	1	5.0	40	78.3	64.5
5.0SMDJ43	5.0SMDJ43C	5PFS	5BFS	47.8	58.4	1	5.0	43	65.8	76.7
5.0SMDJ43A	5.0SMDJ43CA	5PFT	5BFT	47.8	52.8	1	5.0	43	72.8	69.4
5.0SMDJ45	5.0SMDJ45C	5PFU	5BFU	50.0	61.1	1	5.0	45	62.9	80.3
5.0SMDJ45A	5.0SMDJ45CA	5PFV	5BFV	50.0	55.3	1	5.0	45	69.5	72.7
5.0SMDJ48	5.0SMDJ48C	5PFW	5BFW	53.3	65.1	1	5.0	48	59.1	85.5
5.0SMDJ48A	5.0SMDJ48CA	5PFX	5BFX	53.3	58.9	1	5.0	48	65.2	77.4
5.0SMDJ51	5.0SMDJ51C	5PFY	5BFY	56.7	69.3	1	5.0	51	55.4	91.1
5.0SMDJ51A	5.0SMDJ51CA	5PFZ	5BFZ	56.7	62.7	1	5.0	51	61.3	82.4
5.0SMDJ54	5.0SMDJ54C	5PGD	5BGD	60.0	73.3	1	5.0	54	52.4	96.3
5.0SMDJ54A	5.0SMDJ54CA	5RGE	5RGE	60.0	66.3	1	5.0	54	58.0	87.1
5.0SMDJ58	5.0SMDJ58C	5PGF	5BGF	64.4	78.7	1	5.0	58	49.0	103
5.0SMDJ58A	5.0SMDJ58CA	5PGG	5BGG	64.4	71.2	1	5.0	58	54.0	93.6
5.0SMDJ60	5.0SMDJ60C	5PGH	5BGH	66.7	81.5	1	5.0	60	47.2	107
5.0SMDJ60A	5.0SMDJ60CA	5PGK	5BGK	66.7	73.7	1	5.0	60	52.2	96.8
5.0SMDJ64	5.0SMDJ64C	5PGL	5BGL	71.1	86.9	1	5.0	64	44.3	114
5.0SMDJ64A	5.0SMDJ64CA	5PGM	5BGM	71.1	78.6	1	5.0	64	49.0	103
5.0SMDJ70	5.0SMDJ70C	5PGN	5BGN	77.8	95.1	1	5.0	70	40.4	125
5.0SMDJ70A	5.0SMDJ70CA	5PGP	5BGP	77.8	86.0	1	5.0	70	44.7	113







### Electrical Specification @ Tamb 25°C

TECHNOLOGIES 5.0SMDJ SERIES		Device Marking Code		Breakdown voltage VBR @ IT			Maximum Reverse Leakage IR(μA) @VRWM	Working PeakReverse Voltage VRWM (Volts)	Maximum Reverse Surge Current Ipp(A) @10x1000us sinewave	Maximum Clamping Voltage Vc (Volts) @Ipp
Uni-polar	Bi-polar	Uni	Bi	Min (V)	Max (V)	IT (mA)				
5.0SMDJ75	5.0SMDJ75C	5PGQ	5BGQ	83.3	102	1	5.0	75	37.7	134
5.0SMDJ75A	5.0SMDJ75CA	5PGR	5BGR	83.3	92.1	1	5.0	75	41.7	121
5.0SMDJ78	5.0SMDJ78C	5PGS	5BGS	86.7	106	1	5.0	78	36.3	139
5.0SMDJ78A	5.0SMDJ78CA	5PGT	5BGT	86.7	95.8	1	5.0	78	40.1	126
5.0SMDJ80	5.0SMDJ80C	5PGA	5BGA	89.0	109	1	5.0	80	35.3	143
5.0SMDJ80A	5.0SMDJ80CA	5PGB	5BGB	88.8	97.6	1	5.0	80	39.0	130
5.0SMDJ85	5.0SMDJ85C	5PGU	5BGU	94.4	115	1	5.0	85	33.4	151
5.0SMDJ85A	5.0SMDJ85CA	5PGV	5BGV	94.4	104	1	5.0	85	36.9	137
5.0SMDJ90	5.0SMDJ90C	5PGW	5BGW	100	122	1	5.0	90	31.6	160
5.0SMDJ90A	5.0SMDJ90CA	5PGX	5BGX	100	111	1	5.0	90	34.6	146
5.0SMDJ100	5.0SMDJ100C	5PGY	5BGY	111	136	1	5.0	100	28.2	179
5.0SMDJ100A	5.0SMDJ100CA	5PGZ	5BGZ	111	123	1	5.0	100	31.2	162
5.0SMDJ110	5.0SMDJ110C	5PHD	5BHD	122	149	1	5.0	110	25.8	196
5.0SMDJ110A	5.0SMDJ110CA	5PHE	5BHE	122	135	1	5.0	110	28.5	177
5.0SMDJ120	5.0SMDJ120C	5PHF	5BHF	133	163	1	5.0	120	23.6	214
5.0SMDJ120A	5.0SMDJ120CA	5PHG	5BHG	133	147	1	5.0	120	26.2	193
5.0SMDJ130	5.0SMDJ130C	5PHH	5BHH	144	176	1	5.0	130	21.9	231
5.0SMDJ130A	5.0SMDJ130CA	5PHK	5BHK	144	159	1	5.0	130	24.2	209
5.0SMDJ140	5.0SMDJ140C	5PHA	5BHA	156	190	1	5.0	140	20.2	251
5.0SMDJ140A	5.0SMDJ140CA	5PHB	5BHB	155	171	1	5.0	140	22.3	227
5.0SMDJ150	5.0SMDJ150C	5PHL	5BHL	167	204	1	5.0	150	18.8	268
5.0SMDJ150A	5.0SMDJ150CA	5PHM	5BHM	167	185	1	5.0	150	20.8	243
5.0SMDJ160	5.0SMDJ160C	5PHN	5BHN	178	218	1	5.0	160	17.6	287
5.0SMDJ160A	5.0SMDJ160CA	5PHP	5BHP	178	197	1	5.0	160	19.5	259
5.0SMDJ170	5.0SMDJ170C	5PHQ	5BHQ	189	231	1	5.0	170	16.6	304
5.0SMDJ170A	5.0SMDJ170CA	5PHR	5BHR	189	209	1	5.0	170	18.4	275
5.0SMDJ180	5.0SMDJ180C	5PHS	5BHS	200	245	1	5.0	180	15.7	322
5.0SMDJ180A	5.0SMDJ180CA	5PHT	5BHT	200	220	1	5.0	180	17.3	292
5.0SMDJ190	5.0SMDJ190C	5PHU	5BHU	211	258	1	5.0	190	14.8	340
5.0SMDJ190A	5.0SMDJ190CA	5PHV	5BHV	211	232	1	5.0	190	16.4	308
5.0SMDJ200A	5.0SMDJ200CA	5PHW	5BHW	224	247	1	5.0	200	9.3	324
5.0SMDJ220A	5.0SMDJ220CA	5PHX	5BHX	246	272	1	5.0	220	8.4	356
5.0SMDJ250A	5.0SMDJ250CA	5PHZ	5BHZ	279	309	1	5.0	250	7.4	405
5.0SMDJ300A	5.0SMDJ300CA	5PJE	5BJE	335	371	1	5.0	300	6.2	486
5.0SMDJ350A	5.0SMDJ350CA	5PJG	5BJG	391	432	1	5.0	350	5.3	567
5.0SMDJ400A	5.0SMDJ400CA	5PJK	5BJK	447	494	1	5.0	400	4.6	648
5.0SMDJ440A	5.0SMDJ440CA	5PJM	5BJM	492	543	1	5.0	440	4.2	713

**Note:**

1. Suffix 'A' denotes 5% tolerance device. Without 'A' denotes 10% tolerance device.
2. Add suffix 'C' or 'CA' after part number to specify Bi-directional devices.
3. For Bi-Directional devices having VR of 20 volts and under, the IR limit is double .

### Rating and characteristic curves ( 5.0SMDJ Series )

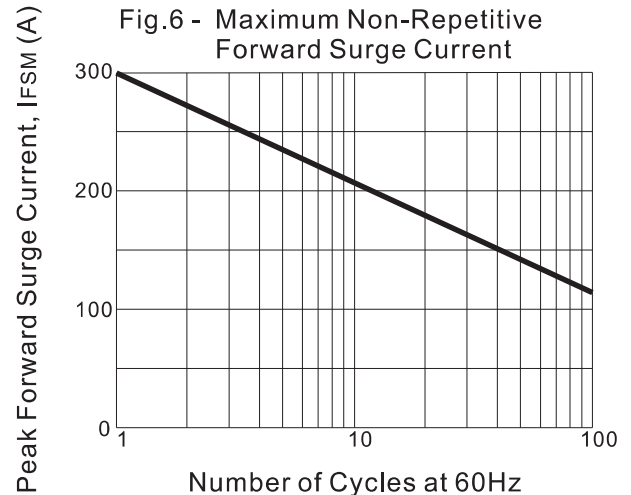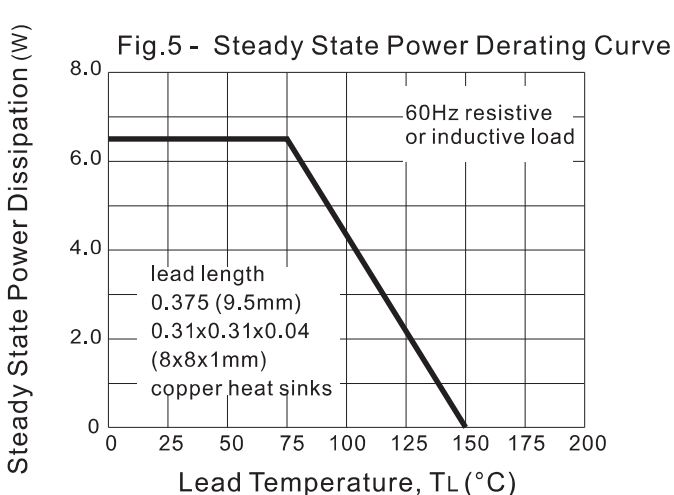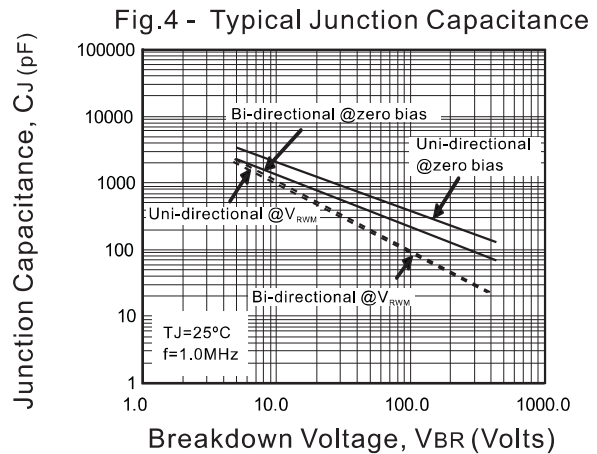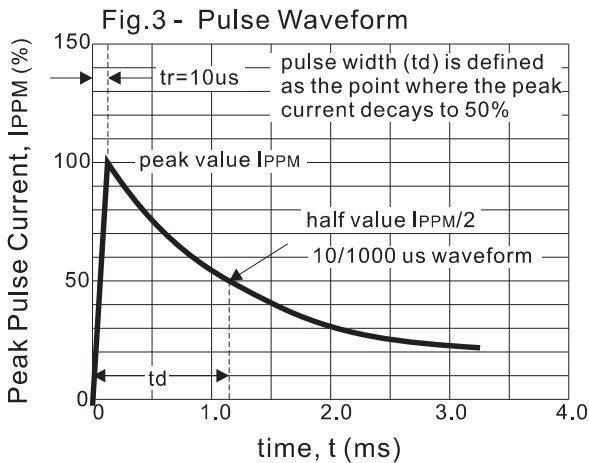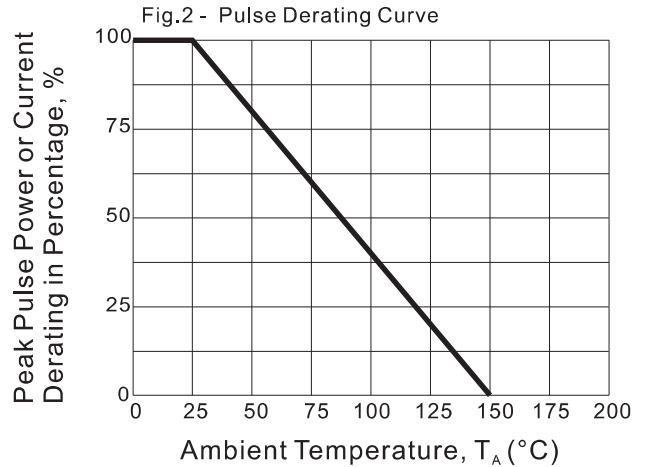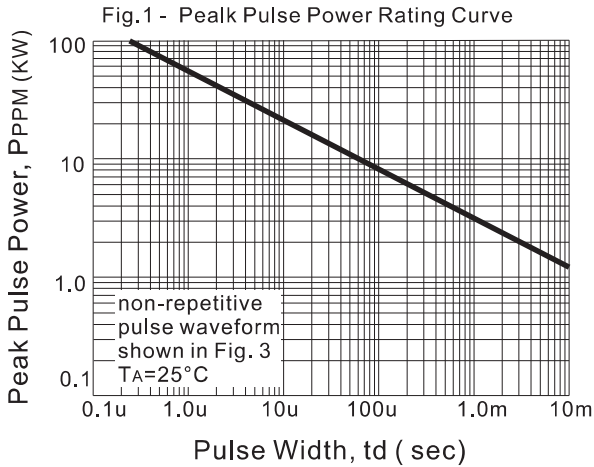

### Rating and characteristic curves ( 5.0SMDJ Series )

Fig. 7 - Transients of several thousand volts can be clamped to a safe level by the TVS









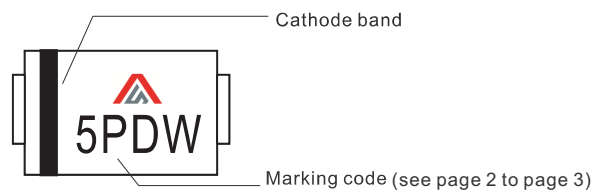

Fig. 8 - Transient current is diverted to ground thru TVS; the voltage seen by the protected load is limited to the clamping voltage level




### Pinning information

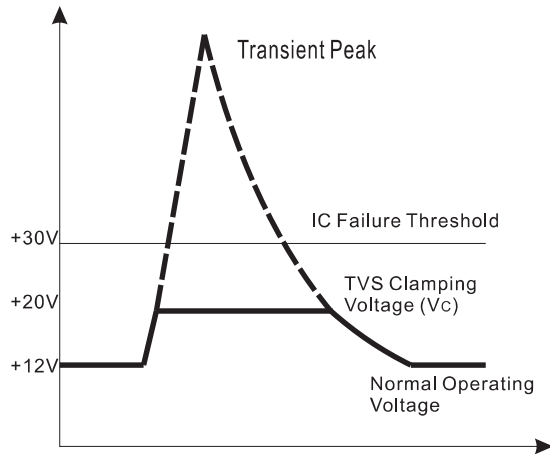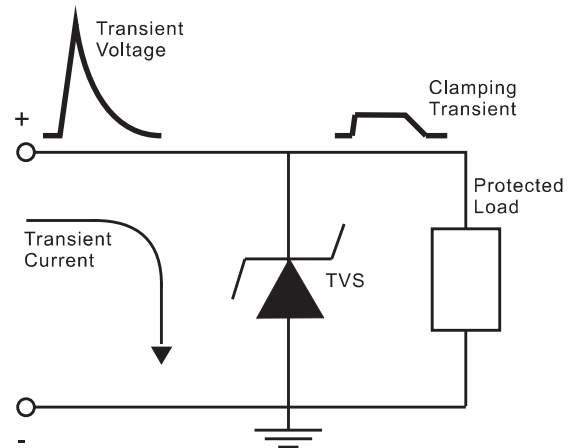Pin	Simplified outline	Symbol
Uni-Directional Pin1 cathode Pin2 anode		
Bi-Directional		

### Marking

Type number	Example
Uni-Directional	
Bi-Directional	

### Suggested solder pad layout

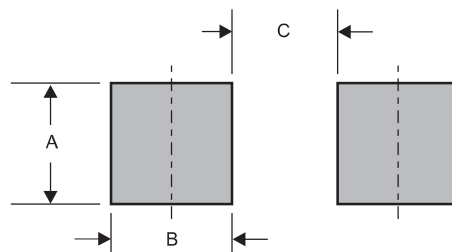

Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SMC	0.132 (3.30)	0.100 (2.50)	0.176 (4.40)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [AnBon](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)