


Features

- Ease of Paralleling
- Zero reverse recovery current
- Zero forward recovery voltage
- Temperature independent switching behaviour
- High temperature operation
- High frequency operation

Key Characteristics		
V_{RRM}	650	V
$I_F, T_c \leq 150^\circ\text{C}$	10	A
Q_c	36	nC

Benefits

- Unipolar rectifier
- Substantially reduced switching losses
- No thermal run-away with parallel devices
- Reduced heat sink requirements

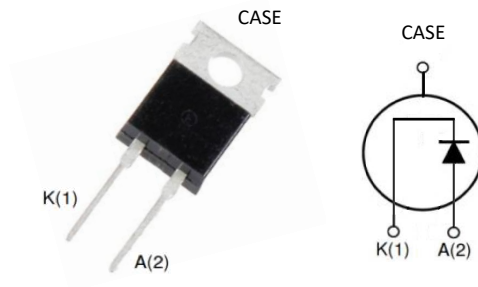

Applications

- Switch Mode Power Supplies (SMPS)
- Boost diodes in PFC or DC/DC stages
- Motor drives
- Solar application, UPS
- Power Switching Circuits

Part No.	Package Type	Marking
ASD1065I	Isolated TO-220-2	ASD1065I

Maximum Ratings

Parameter	Symbol	Test Condition	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}		650	V
Surge Peak Reverse Voltage	V_{RSM}		650	V
DC Blocking Voltage	V_{DC}		650	V
Continuous Forward Current	I_F	$T_C=25^{\circ}C$	30	A
		$T_C=135^{\circ}C$	14	
		$T_C=150^{\circ}C$	10	
Repetitive Peak Forward Surge Current	I_{FRM}	$T_C=25^{\circ}C$, $t_p=10ms$, Half Sine Wave, $D=0.3$	50	A
Non-repetitive Peak Forward Surge Current	I_{FSM}	$T_C=25^{\circ}C$, $t_p=10ms$, Half Sine Wave	100	A
Power Dissipation	P_{TOT}	$T_C=25^{\circ}C$	90.4	W
		$T_C=110^{\circ}C$	39.2	W
Operating Junction	T_j		$-55^{\circ}C$ to $175^{\circ}C$	$^{\circ}C$
Storage Temperature	T_{stg}		$-55^{\circ}C$ to $175^{\circ}C$	$^{\circ}C$
Mounting Torque		M3 Screw	1	Nm
		6-32 Screw	8.8	lbf-in

Thermal Characteristics

Parameter	Symbol	Test Condition	Value	Unit
			Typ.	
Thermal resistance from junction to case	R_{thJC}		1.66	$^{\circ}C/W$



Electrical Characteristics

Parameter	Symbol	Test Conditions	Numerical		Unit
			Typ.	Max.	
Forward Voltage	V _F	I _F =10A, T _j =25°C	1.45	1.7	V
		I _F =10A, T _j =175°C	1.7	2.5	
Reverse Current	I _R	V _R =650V, T _j =25°C	10	50	μA
		V _R =650V, T _j =175°C	20	100	
Total Capacitive Charge	Q _C	V _R =400V, T _j =150°C $Q_C = \int_0^{V_R} C(V)dV$	36	-	nC
Total Capacitance	C	V _R =0V, T _j =25°C, f=1MHZ	690	730	pF
		V _R =200V, T _j =25°C, f=1MHZ	72	75	
		V _R =400V, T _j =25°C, f=1MHZ	71	74	


Performance Graphs

1) Forward IV characteristics as a function of T_j :


2) Reverse IV characteristics as a function of T_j :

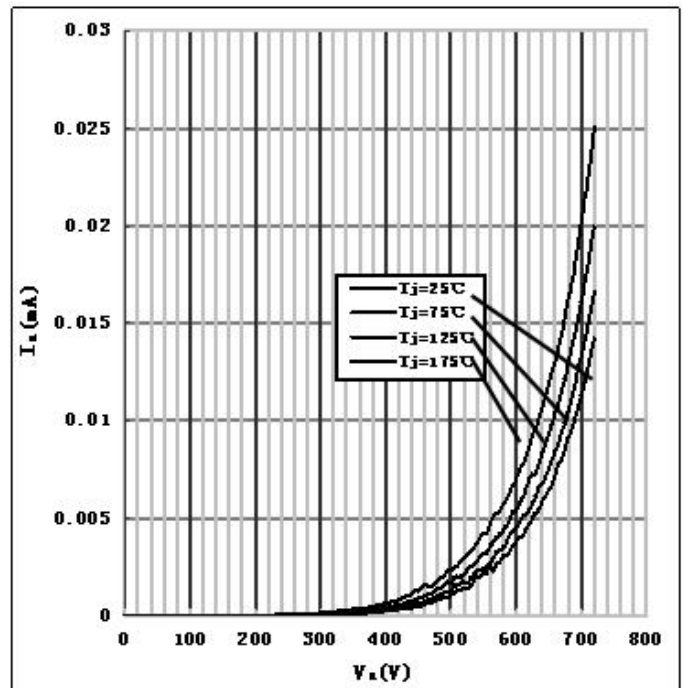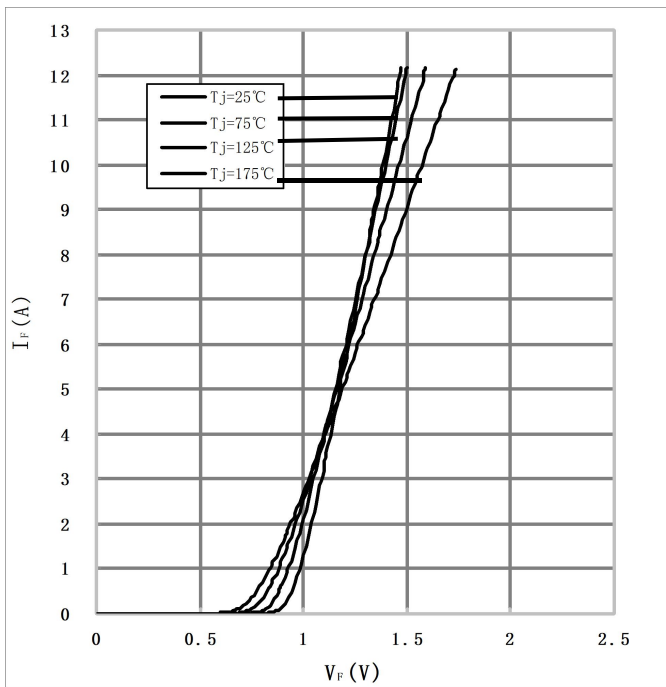


3) Current Derating

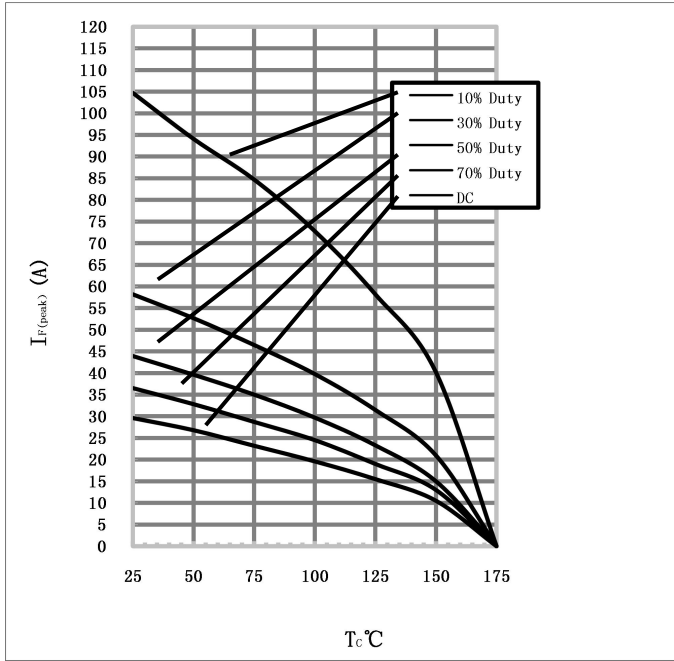

4) Capacitance vs. reverse voltage :

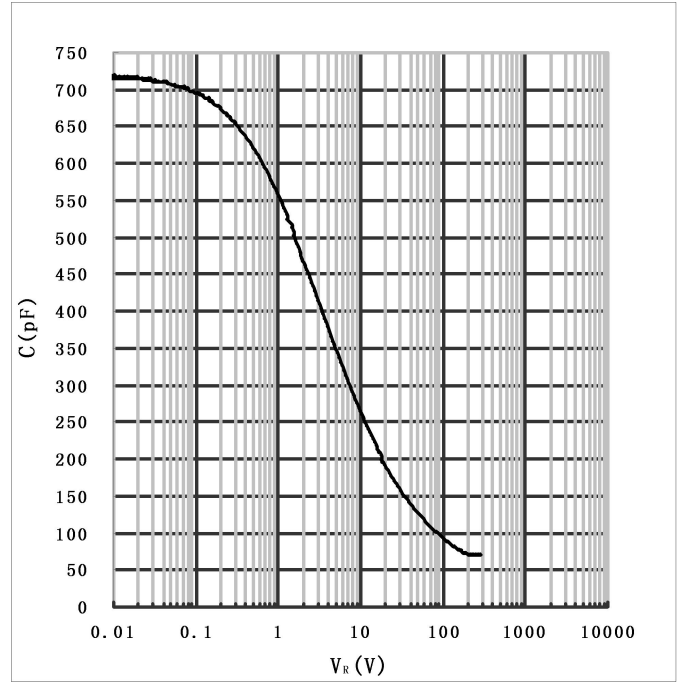

Package TO-220-2

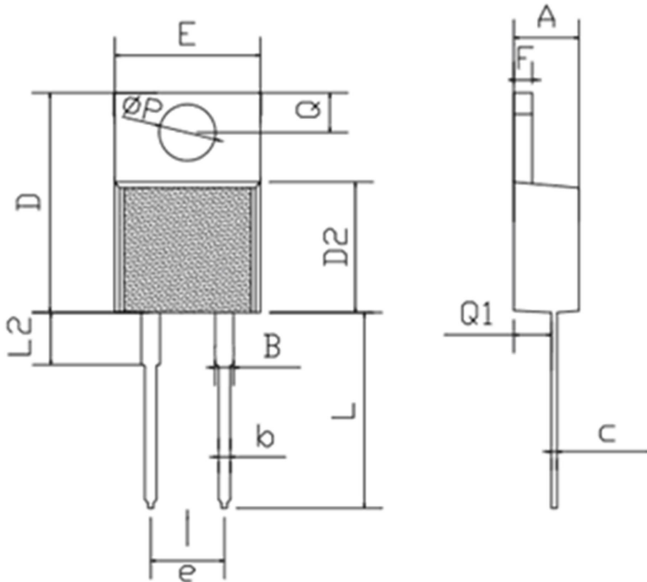

DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.80	0.173	0.189
B	1.10	1.40	0.043	0.055
b	0.70	0.90	0.028	0.035
c	0.28	0.48	0.011	0.019
D	14.50	15.50	0.571	0.610
D2	8.20	9.20	0.323	0.362
E	9.70	10.40	0.382	0.409
e	5.01	5.12	0.197	0.202
F	1.20	1.35	0.047	0.053
L	13.00	14.00	0.512	0.551
L2	3.60	3.80	0.142	0.150
Q	2.50	3.00	0.098	0.118
Q1	2.20	2.90	0.087	0.114
P	3.60	4.00	0.142	0.157

DISCLAIMER

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Copyright ©2018 Anbon Semiconductor Company Ltd.
All rights reserved.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [AnBon](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SBS818-TL-E](#) [SK310-T](#)
[SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#)
[DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#)
[NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#)