

FEATURES

- Ideally suited for automatic insertion
- For switching and AF amplifier applications



MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CB0}	Collector-Base Voltage	BC846	80
		BC847	50
		BC848	30
V _{CEO}	Collector-Emitter Voltage	BC846	65
		BC847	45
		BC848	30
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current –Continuous	0.1	A
P _C	Collector Power Dissipation	200	mW
R _{θJA}	Thermal Resistance From Junction To Ambient	625	°C/W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C









DEVICE MARKING

BC846A=1A; BC846B=1B;
BC847A=1E; BC847B=1F; BC847C=1G;
BC848A=1J; BC848B=1K; BC848C=1L


ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BC846	I _C = 10μA, I _E =0	80			V
	BC847		50			
	BC848		30			
Collector-emitter breakdown voltage	BC846	I _C = 10mA, I _B =0	65			V
	BC847		45			
	BC848		30			
Emitter-base breakdown voltage	V _{EBO}	I _E = 10μA, I _C =0	6			V
Collector cut-off current	BC846	V _{CB} =70 V, I _E =0			0.1	μA
	BC847	V _{CB} =50 V, I _E =0				
	BC848	V _{CB} =30 V, I _E =0				
Collector cut-off current	BC846	V _{CE} =60 V, I _B =0			0.1	μA
	BC847	V _{CE} =45 V, I _B =0				
	BC848	V _{CE} =30 V, I _B =0				
Emitter cut-off current	I _{EBO}	V _{EB} =5 V, I _C =0			0.1	μA
DC current gain	BC846A,847A,848A	V _{CE} = 5V, I _C = 2mA	110		220	
	BC846B,847B,848B		200		450	
	BC847C,BC848C		420		800	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =100mA, I _B = 5mA			0.5	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =100mA, I _B = 5mA			1.1	V
Transition frequency	f _T	V _{CE} = 5 V, I _C = 10mA f=100MHz	100			MHz
Collector output capacitance	C _{ob}	V _{CB} =10V,f=1MHz			4.5	pF

Typical Characteristics

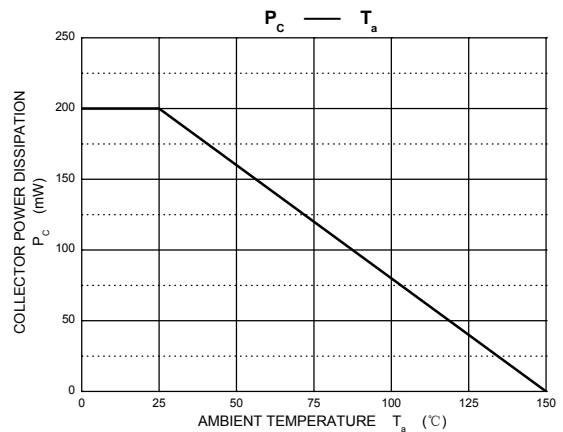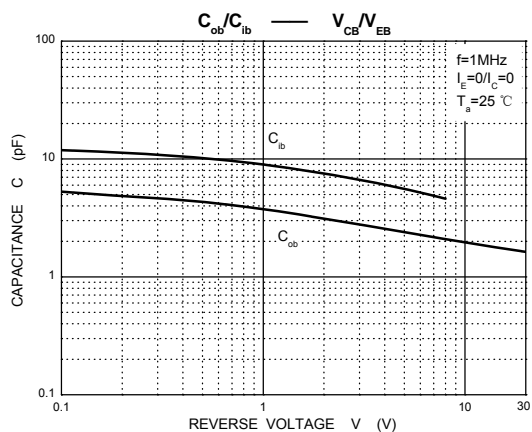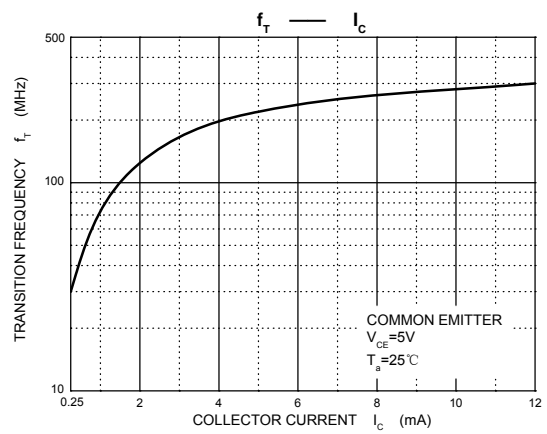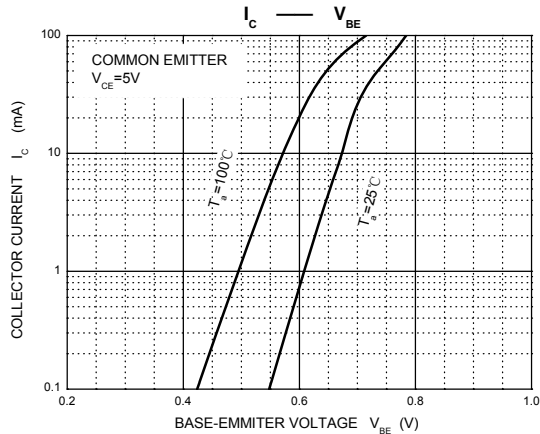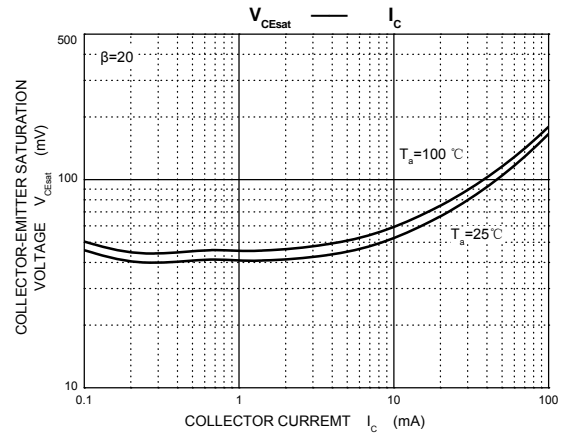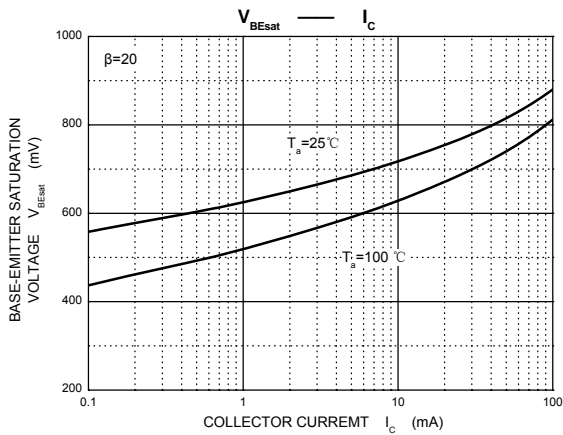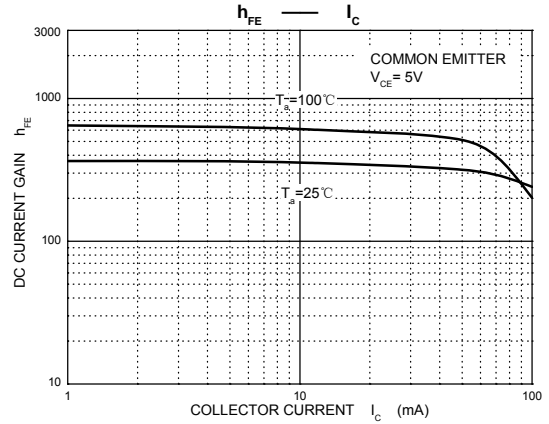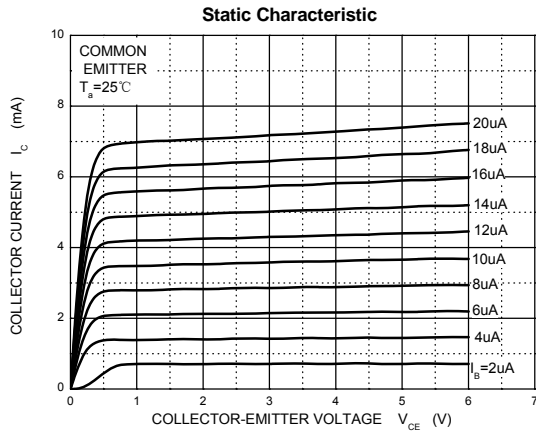


SOT-23 Package Outline Dimensions

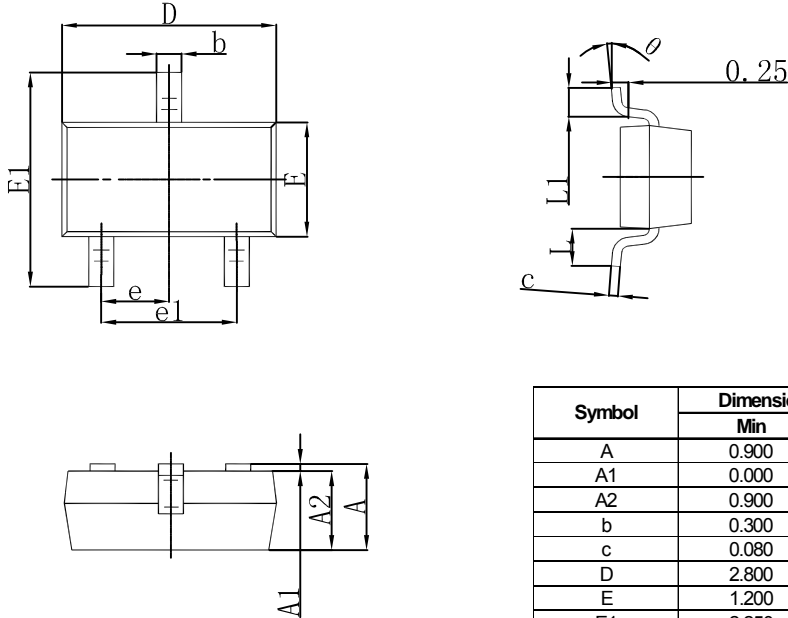

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	6°

SOT-23 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [anbon manufacturer](#):

Other Similar products are found below :

[AU6N70S](#) [MBR2045CT](#) [AU10N65S](#) [GBU810](#) [AS2312](#) [AS2102W](#) [RB706F-40](#) [AS3442](#) [SMAJ7.5CA](#) [SMF5.0A](#) [SMBJ200A](#) [SMAJ30A](#)
[BAV99](#) [DSK14](#) [BSS123](#) [SMAJ17CA](#) [SMBJ14CA](#) [AU4N60S](#) [AF8N60S](#) [SMAJ13CA](#) [SMAJ48A](#) [SL24-F](#) [SMF28CA](#) [GBU1010](#) [2SC3356](#)
[SMBJ24CA](#) [SMCJ12A](#) [AS3418](#) [SMF8.0CA](#) [SMAJ26A](#) [SMF36A](#) [SMBJ48A](#) [KBL410](#) [AS2341](#) [DSK26](#) [SMF48CA](#) [AS3523](#) [BC807-25](#)
[SMBJ10A](#) [MURS260-B](#) [SMAJ12A](#) [SMBJ43CA](#) [BAT43WS](#) [SS26-B](#) [SMF10CA](#) [SMAJ10CA](#) [SMAJ12CA](#) [BZT52C5V1S](#) [AS3100](#)
[SMF40CA](#)