


Powerpole® Modular Connectors

B

Plug with Latch

6 Pole Plug Exploded View with Conduit Clamp

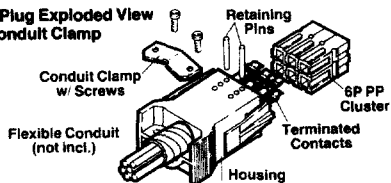

Description

Complete Powerpole® Pak Plug with Latch - includes Powerpole® Pak Plug Housing, 30 amp black Powerpole connectors and Cable Clamp Hardware Pak.

Size


2 Pole 1450G3
3 Pole 1451G3 (male)
4 Pole 1452G3
6 Pole 1453G3
8 Pole 1454G3

Catalog No.

* Note: The recommended tightening torque for conduit/cable clamp screws is 5 in.lb max. - over tightening may cause stripping to occur.

Plug without Latch

3 Pole Plug Exploded View with Cable Clamp

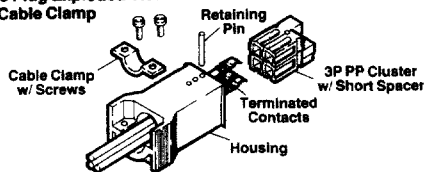

Description

Complete Powerpole® Pak Plug without Latch - includes Powerpole® Pak Plug Housing, 30 amp black Powerpole® connectors and Cable Clamp Hardware Pak.

Size


2 Pole 1450G2
3 Pole 1451G2 (female)
3 Pole 1451G6 (male)
4 Pole 1452G2
6 Pole 1453G2
8 Pole 1454G2

Catalog No.

* Note: The recommended tightening torque for conduit/cable clamp screws is 5 in.lb max. - over tightening may cause stripping to occur.

Snap-in Receptacle

8 Pole Receptacle Exploded View

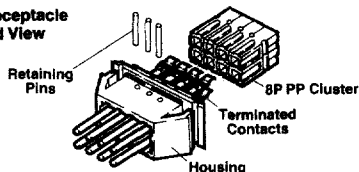

Description

Complete Powerpole® Pak Receptacle - includes Powerpole® Pak Receptacle Housing, 30 amp black Powerpole® connectors and Retaining Pin(s)

Size

2 Pole 1450G1
3 Pole 1451G1 (female)
4 Pole 1452G1
6 Pole 1453G1
8 Pole 1454G1

Catalog No.

Powerpole® Pak Hardware

Description

Size

Catalog No.

Color coding, special keying, wiring with flexible conduit or using 10 or 45 amp Powerpole® connectors are possible by specifying above Powerpole® Pak outer housing, Powerpole® connectors and spacer keys from pg. 24 and Powerpole® Pak Hardware from table on page 21.

Cable Clamp Hardware Pak for Plug with Latch or Plug without Latch- includes cable clamp, 2 screws & retaining pin(s) for strain relief.

4 Pole 115G1
6 Pole 115G2
8 Pole 115G3

Flexible Conduit Hardware Pak for Plug with Latch and Plug without Latch - includes conduit clamp, 2 screws & retaining pin(s) for capturing flexible conduit at back end of plug.

4 Pole 110G10
6 Pole 110G11
8 Pole 10G15

Retaining Pin(s) for Snap-In Receptacle
1 Req'd
2 Req'd
3 Req'd

4 Pole 110G9
6 Pole 110G9
8 Pole 110G9

FOR TEMPERATURE RISE AND PULSE CURRENT CHARACTERISTICS, USE THE PP10, PP15, PP30 AND PP45 MULTIPOLE GRAPHS IN THIS SECTION.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Anderson Power Products](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [829992-1](#) [902-77-02113](#) [129-1J](#) [AN0024023](#) [E6374G1](#)
[e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-](#)
[S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#)
[KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#) [29652](#) [1646905-1](#) [1648320-1](#) [1648582-1](#) [1650195-2](#)