

IMC-C100-XX Series

Compact 10/100TX to 100FX Industrial Media Converter with SC/ST Connector



Features


- ▶ 1*10/100Tx Fast Ethernet
- ▶ 1*100Fx SC/ST Connector (Multi / Single-Mode)
- ▶ RJ45 Port Support Auto MDI / MDI-X Function
- ▶ Auto Negotiation Speed, Half / Full Duplex
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Fault Pass Through (LFP)
- ▶ Built-in Far End Fault (FEF)
- ▶ Wide-Range Redundant Power Design
- ▶ Redundant Power Input: 12~48VDC
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' **IMC-C100-XX Series** is a compact IP30 rated Ethernet-to-Fiber media converter featuring a 10/100TX Ethernet port and a fixed fiber interface supporting ST or SC connectors depending on the model. There are Multimode and Single-Mode models to support applications with a variety of fiber distances and types. It is designed to fulfill industrial applications that require fiber optic distance extension while using minimal space.

The IMC-C100-XX series has a built-in "Link Fault Pass Through" (LFP) and "Far End Fault" (FEF) function with 12~48VDC redundant power inputs with reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and provides operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 80°C.

DIMENSIONS

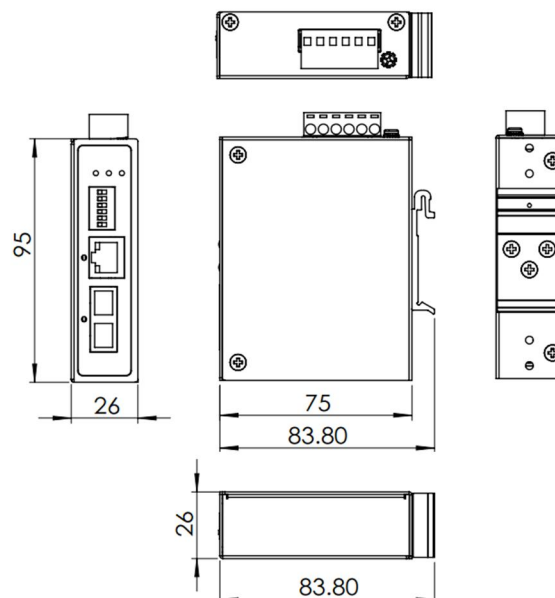

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x back pressure flow control
Switch Properties	
Memory Buffer	128kbits
Interface	
Ethernet Port	1*RJ45 Port w/10/100T(X), auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
Fiber Port	1*100Fx SC/ST type connector Multi-mode: 50/125um or 62.5/125um Single-mode: 9/125um or 10/125um
Fiber Wavelength	Depends on fixed fiber modules
LED Indicators	Power 1, Power 2, Fault:: On / Off Fiber Port: Link / Act Ethernet Port: Link / Act
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions	26 x 95 x 75 mm (W x H x D)
Weight	Unit: 0.551 lb. Shipping: 0.815 lb.
Mounting	DIN-Rail Mounting, Wall Mounting

Power Requirement	
Input Voltage	12 to 48VDC, Redundant Inputs
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Overload Current Protection	Present
Power Consumption	2 Watts for System
Relay Contact	24VDC, 1A resistive
Environmental Limits	
Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 80°C
Storage Temperature	-40°C to 85°C
Ambient Relative Humidity	5% to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN 55032 Class A, EN 61000-6-4 Class A
EMS	CE EN 55024 Class A, EN 61000-6-2 Class A, IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1 (Pending), UL 61010-2-201 (Pending)
Warranty	5 Years

ORDERING INFO

IMC-C100-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector
IMC-C100-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, SC Connector; EOT: -40°C to 80°C
IMC-C100-ST-M	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector
IMC-C100-ST-M-T	Compact 10/100TX to 100FX Industrial Media Converter, Multi-Mode 2km, ST Connector; EOT: -40°C to 80°C
IMC-C100-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector
IMC-C100-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, SC Connector; EOT: -40°C to 80°C
IMC-C100-ST-S3	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector
IMC-C100-ST-S3-T	Compact 10/100TX to 100FX Industrial Media Converter, Single-Mode 30km, ST Connector; EOT: -40°C to 80°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [ANTAIRA](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)