

# LNP-0800 Series

## Features

8-Port Industrial PoE+ Unmanaged Ethernet Switch with 8\*10/100Tx (30W/Port)




- ▶ 8-Port IEEE 802.3at compliant PoE+ (30W/Port)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 2K MAC Address Table
- ▶ Network Broadcast Storm Protection
- ▶ EFT Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 48~55VDC
- ▶ Built-in 1 relay output for Port Break Alarm
- ▶ IP30 Rugged Aluminum Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

## INTRODUCTION

Antaira Technologies' LNP-0800 series is an industrial PoE+ unmanaged Ethernet switch featuring 8\*10/100Tx PoE+ ports. Each power over Ethernet (PoE+) port supports an IEEE 802.3at high power PoE+ output up to 30W per port, making it ideal for applications that demand a PoE+ power source.

The LNP-0800 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). The series provides Ethernet connectivity with PoE+ functions ideal for outdoor or harsh industrial application environments, such as, security surveillance, ITS-traffic monitoring systems, facility management for power/utility, water wastewater treatment plants, and automated production lines in factory automation.

## DIMENSIONS

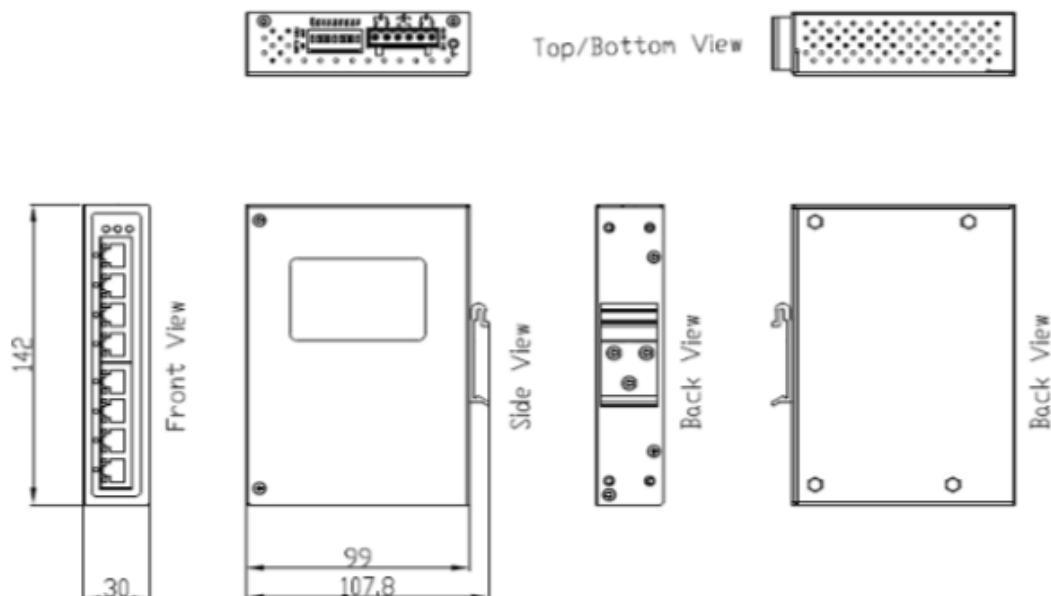

## SPECIFICATIONS

Technology	
<b>Standards</b>	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet IEEE 802.3x Flow Control and Back-Pressure IEEE 802.3at Power over Ethernet
<b>Processing Type</b>	Store and Forward
<b>Protocol</b>	CSMA/CD
<b>Flow Control</b>	IEEE 802.3x back pressure flow control
Switch Properties	
<b>Switch Architecture</b>	Back-Plane (Switching Fabric): 1.0Gbps
<b>Transfer Rate</b>	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port
<b>Jumbo Frame</b>	-
<b>MAC Table</b>	2K
Interface	
<b>Ethernet RJ45 Port</b>	10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection 8*10/100Tx (PoE+)
<b>Fiber Port</b>	-
<b>PoE Port Pin Assignment</b>	V+, V+, V-, V-, for pin 1, 2, 3, 6 (Endspan, MDI-X Alternative A)
Protection	
<b>Housing</b>	Metal IP30 rated
<b>Dimensions</b>	30 x 142 x 99 mm
<b>Weight</b>	Unit: 1.1 lbs; Shipping: 1.45 lbs
<b>Mounting</b>	DIN-Rail; Wall-mounting (included)

Power Requirement	
<b>Input Voltage &amp; Power Connection</b>	48~55VDC, Redundant Input w/ removable 4-contact terminal block
<b>Reverse Polarity Protection</b>	Present
<b>Overload Current Protection</b>	Slow-Blown Fuse
<b>PoE Power Output</b>	25W @ 48VDC (per PoE port) 30W @ 51~55VDC (per PoE port)
<b>Power Consumption</b>	210 Watts @ 48VDC 250 Watts @ 51~55VDC
Environmental Limits	
<b>Operating Temperature</b>	STD: -10° to 70° C EOT: -40° to 75° C
<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
Regulatory Approvals	
<b>EMI</b>	FCC Class A
<b>EMS</b>	EN6100-4-2,3,4,5,6,8 EN6100-6-2,4
<b>Free Fall</b>	IEC60068-2-32
<b>Shock</b>	IEC60068-2-27
<b>Vibration</b>	IEC60068-2-6
<b>Green</b>	RoHS Compliant
<b>Certifications</b>	FCC, CE, UL 508, UL Class 1 Division 2, ISA 12.12.01
<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LNP-0800</b>	8-Port Industrial 802.3at PoE+ Unmanaged Ethernet Switch with 8*10/100Tx (30W/Port)
<b>LNP-0800-T</b>	8-Port Industrial 802.3at PoE+ Unmanaged Ethernet Switch with 8*10/100Tx (30W/Port), EOT: -40° to 75°C
Optional Accessories	
<b>DR-75-48</b>	75W Industrial DIN-Rail Power Supply
<b>SDR-120-48</b>	120W Industrial DIN-Rail Power Supply
<b>SDR-240-48</b>	240W Industrial DIN-Rail Power Supply
<b>SDR-480-48</b>	480W Industrial DIN-Rail Power Supply

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Controllers](#) category:*

*Click to view products by [ANTAIRA](#) manufacturer:*

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)  
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)  
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)  
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)  
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)  
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)