

LNX-1002C-SFP Series

10-Port Industrial Gigabit Unmanaged Ethernet Switch, 8*10/100Tx, 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)



Features


- ▶ Supports 8-Port 10/100Tx and 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 8K MAC Address Table
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-1002C-SFP series industrial gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable with 8*10/100Tx and 2*GigE combo ports (2*10/100/1000Tx RJ45 and 2*100/1000 SFP slots for fiber). This series is ideal for applications that demand high bandwidth and long distance communication.

The LNX-1002C-SFP series provides a high EFT and ESD protection along with a dual power input having a reverse power polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur. There is a wide operating temperature model that supports from -40 to 75°C. Also, this product series has been designed to fulfill special needs for industrial automation and harsh outdoor environment applications.

DIMENSIONS

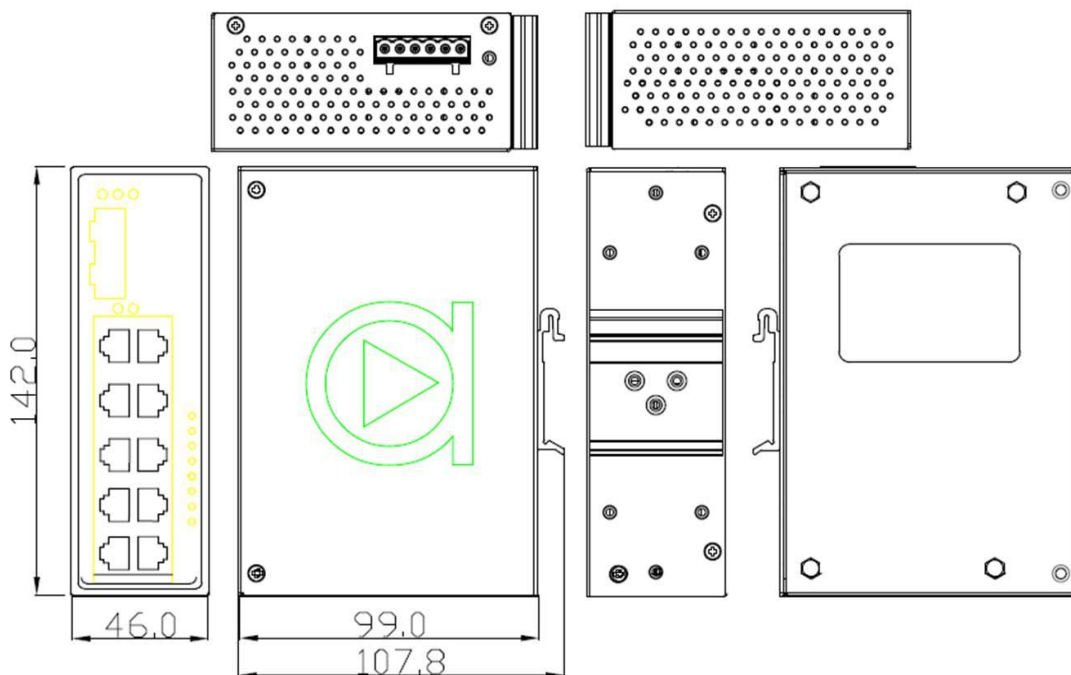

SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseTx Ethernet IEEE 802.3u 100BaseTx Fast Ethernet IEEE 802.3ab 1000BaseTx Ethernet IEEE 802.3az Gigabit Fiber
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x back pressure flow control
Switch Properties	
Switch Architecture	Non-Blocking Switching Fabric 14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port
Transfer Rate	148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port
Memory Buffer	4Mbps (default)
Jumbo Frame	-
MAC Table Size	8K
Interface	
Ethernet Port	6*RJ45 Ports w/10/100Tx
Gigabit Combo Port (Copper/SFP)	2 *RJ45 Ports w/10/100/1000TX Ethernet and 2*100/1000 SFP Slot
Network Cable	10Base Tx: 2-pair UTP/STP Cat. 3,4,5 100Base Tx: 2-pair UTP/STP Cat. 5 1000Base Tx: 2-pair UTP/STP Cat. 5/5E
Power Requirements	
Input Voltage	12~48VDC, Redundant Input
Overload Current Protection	Present
Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Yes
Power Consumption	10 Watts
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions	46 x 99 x 142 mm (W*D*H)
Weight	Unit: 1.5lbs. Shipping Weight: 2.0 lbs.
Mounting	DIN-Rail, Wall mounting (optional)
Environmental Limits	
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	EN61000-4-2,3,4,5,6,8 EN61000-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1, UL 61010-2-201, UL Class 1 Division 2, ISA 12.12.01
Warranty	5 Years

ORDERING INFO

LNX-1002C-SFP	10-Port Industrial Gigabit Unmanaged Ethernet Switch, w/8*10/100Tx, and 2*Gigabit Combo ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)
LNX-1002C-SFP-T	10-Port Industrial Gigabit Unmanaged Ethernet Switch, w/8*10/100Tx, and 2*Gigabit Combo ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots) ; EOT: -40 to 75C

Optional Accessories	
DR-15-24	15W Industrial Din Rail Power Supply, 24VDC
DR-45-24	45W Industrial Din Rail Power Supply, 24VDC
MDR-60-48	60W Industrial Din Rail Power Supply, 48VDC
DR-75-48	75W Industrial Din Rail Power Supply, 48VDC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [ANTAIRA](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)