

LNX-800AG Series

8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx



Features


- ► Supports 8-Port 10/100/1000Tx RJ45 Fast Ethernet
- ► Supports Auto MDI/MDI-X Function
- ► Store-and-Forward Switching Architecture
- ► 16Gbps Back-Plane (Switching Fabric)
- ▶ 8K MAC Address Table
- ► Surge Protection: 3,000 VDC Support
- ► ESD Protection: 6,000 VDC Support
- ► Redundant Power Input Design: 12~48VDC
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ► IP30 Rugged Metal Case Design
- ► DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range STD: -10° to 70°C, EOT: -40° to 75°C
- ► 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-800AG series industrial Gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable with 8*10/100/1000Tx, making it ideal for applications that demand a high bandwidth connectivity solution.

This series provides a high EFT and ESD protection that has a dual power input with a reverse power polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur. There is a wide operating temperature model that supports -40 to 75°C. The LNX-800AG series is an ideal solution for harsh outdoor weather environments and industrial applications.

DIMENSIONS

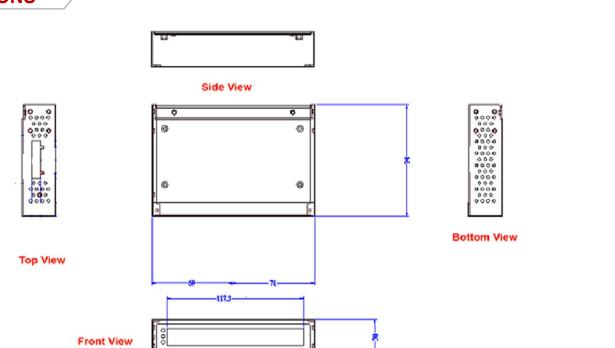



SPECIFICATIONS

Technology	
Standards	IEEE 802.3 10BaseTx Ethernet IEEE 802.3u 100BaseTx Fast Ethernet IEEE 802.3az Gigabit Fiber
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x back pressure flow control
Switch Properties	
Switch Architecture	Back-Plane (Switching Fabric): 16Gbps
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
Interface	
Ethernet Port	8*10/100/1000Tx RJ45
Fiber Port	-
Network Cable	10Base Tx: 2-pair UTP/STP Cat. 3,4,5 100Base Tx: 2-pair UTP/STP Cat. 5 1000Base Tx: 2-pair UTP/STP Cat. 5/5E
Mechanical Charact	eristics
Housing	Metal, IP30 protection
Dimensions	30 x 140 x 95 mm
Weight	Unit: 1.0 lbs; Shipping: 1.5 lbs
Mounting	DIN-Rail; Wall Mounting (optional)

Power Requirement	
Input Voltage	12~48VDC, Redundant Input
Power Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Yes
Overload Current Protection	Present
Power Consumption	7.5 Watts
Environmental Limits	
Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	5
EMI	FCC Class A
EMS	EN61000-4-2,3,4,5,6,8, EN61000-6-2,4
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL Class 1 Division 2, UL 61010-1, UL 61010-2-201
Warranty	5 Years

ORDERING INFO

LNX-800AG	8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx
LNX-800AG-T	8-Port Industrial Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000Tx; EOT: -40° to 75°C
Optional Accessories	
MDR-10-24	10W Industrial DIN-Rail Power Supply, 24VDC
DR-15-24	15W Industrial DIN-Rail Power Supply, 24VDC
DR-45-24	45W Industrial DIN-Rail Power Supply, 24VDC
DR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Controllers category:

Click to view products by ANTAIRA manufacturer:

Other Similar products are found below:

CS1WCN223 CS1WCN713 CS1WKS001E 61F-11NH 61FGPN8DAC120 61F-GP-NT AC110 61F-GPN-V50-AC110 70177-1011 F03-03

HAS B F03-03 HAS C F03-31 81513201 81513535 81550401 FT1A-C12RA-W 88981106 H2CAC24A R88A-CAGA005S R88A
CRGB003CR-E R88ARR080100S R88A-TK01K DCN1-1 DTB4896VRE DTB9696CVE DTB9696LVE MR-50LF+ E53-AZ01 E53E8C

E5CWLQ1TCAC100240 B300LKL21 NE1ASCPU02EIPVER11 NE1SCPU01 NE1SDRM21U NSCXDC1V3 NSH5-232CW-3M

NT20SST122BV1 NV3Q-SW41 NV4W-ATT01 NV-CN001 OAS-160-N K31S6 K33-L1B K3TX-AD31A L595020 SRS2-1 G32X-V2K

26546803 26546805 26546831 CJ1W-OD204