

LNX-C500 Series

Compact 5-Port Industrial Unmanged Ethernet Switches, w/5*10/100Tx, 12~48VDC Power Input




Features

- Compact Industrial Grade Design
- Supports 5-Port 10/100Tx RJ45 Fast Ethernet
- Supports Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- Redundant Power Input Design: 12~48VDC
- Power Polarity Reserve Protect
- Overload Current Protection
- ▶ IP30 Rugged Metal Case Design
- DIN-Rail and Wall Mount Support
- Operating Temperature Range: STD:-10° to 70°C, EOT:-40° to 75°C
- 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNX-C500 series is a compact 5-port industrial Ethernet switch. The small form factor of this metal IP30 rated industrial switch is 30% smaller allowing for a more versatile implementation. The LNX-C500 series is equipped with 5*10/100Tx RJ45 Ethernet ports; with a backplane speed of 1gbps. The industrial grade design and compact size of the LNX-C500 series makes this the ideal unit for integration into projects or other applications that need a small footprint.

The LNX-C500 series supports high EFT & ESD protection through the redundant power inputs that support reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and provides operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 75°C. This is an industrial grade unit applicable for networking applications in factory automation, ITS, power/utility, water wastewater treatment plants, or any application that needs a compact solution.

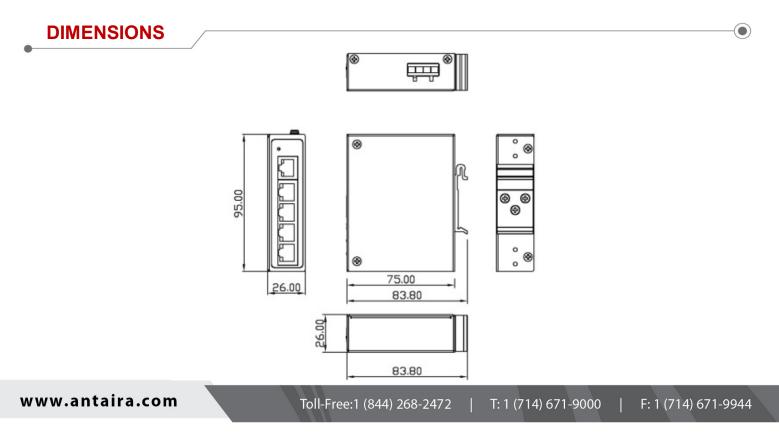

entaira®

 \mathbf{O}

 \odot

SPECIFICATIONS

Technology		Mechanical Characteri	stics
Standards	IEEE 802.3 10Tx Ethernet	LED Indicator	Per Unit: Power 1 & 2
	IEEE 802.3u 100Tx Fast Ethernet	Housing	Metal IP30 rated
Switch Properties	3	Dimensions	26 x 95 x 75 mm
Protocol	CSMA/CD	Weight	Unit: 1.0 lbs; Shipping: 1.5 lbs
Data Process	Store and forward	Mounting	DIN-Rail; Wall-mount (optional)
Transfer Rate	14,880pps for 10Base-T Ethernet port	Power Requirement	
	148,8800pps for 100Base-T Fast Ethernet port	Input Voltage	12~48VDC Redundant Input
Packet Buffer	448 Kbits	Power Connection	1 removable 4-contact terminal block
MAC Table	8K	Power Consumption	1.2 Watts
Flow Control	IEEE 802.3x for full duplex mode, back pressure	Environmental Limits	
	for half duplex mode	Operating Temperature	STD: -10° to 70° C
Port Interface		Operating Temperature	EOT: -40° to 75° C
Ethernet RJ45	duplex mode, and auto MDI/MDI-X connection	Storage Temperature	-40°C ~ 85°C
Port		Ambient Relative Humidity	5 to 95%, (non-condensing)
Protection		Regulatory Approvals	
Overload Current	Present	EMI	FCC Class A
Power Reverse Polarity	Present (the unit will not be on, if power reverse)	EMS	EN61000-4-2,3,4,5,6,8
		Free Fall	IEC60068-2-32
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable;	Shock	IEC60068-2-27
	100Base-TX: 2-pair UTP/STP Cat. 5 cable.	Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
		Compliance	NEMA TS1/TS2

ORDERING INFO

LNX-C500	Compact 5-Port Industrial Ethernet Switch with 5*10/100Tx		
LNX-C500-T	Compact 5-Port Industrial Ethernet Switch with 5*10/100Tx; EOT -40° to 75°C		
Optional Access	sories		
DR-15-12	15W Industrial DIN-Rail Power Supply, 12VDC		
MDR-20-24	20W Industrial DIN-Rail Power Supply, 24VDC		
MDR-40-48	40W Industrial DIN-Rail Power Supply, 48VDC		
MDR-60-48	60W Industrial DIN-Rail Power Supply, 48VDC		
DR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC		

Warranty

5 Years

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Controllers category:

Click to view products by ANTAIRA manufacturer:

Other Similar products are found below :

CS1WCN223 CS1WCN713 CS1WKS001E 61F-11NH 61FGPN8DAC120 61F-GP-NT AC110 61F-GPN-V50-AC110 70177-1011 F03-03 HAS B F03-03 HAS C F03-31 81513201 81513535 81550401 FT1A-C12RA-W 88981106 H2CAC24A R88A-CAGA005S R88A-CRGB003CR-E R88ARR080100S R88A-TK01K DCN1-1 DTB4896VRE DTB9696CVE DTB9696LVE MR-50LF+ E53-AZ01 E53E8C E5CWLQ1TCAC100240 B300LKL21 NE1ASCPU02EIPVER11 NE1SCPU01 NE1SDRM21U NSCXDC1V3 NSH5-232CW-3M NT20SST122BV1 NV3Q-SW41 NV4W-ATT01 NV-CN001 OAS-160-N K31S6 K33-L1B K3TX-AD31A L595020 SRS2-1 G32X-V2K 26546803 26546805 26546831 CJ1W-OD204