

# LNX-C500G Series

Compact 5-Port Industrial Gigabit Unmanaged Ethernet Switches, w/5\*10/100/1000Tx, 12~48VDC Power Input





#### **Features**


- Compact Industrial Grade Design
- ► Supports 5-Port 10/100/1000Tx RJ45 Gigabit Ethernet
- ► Supports Auto MDI/MDI-X Function
- ► Store-and-Forward Switching Architecture
- ▶ Jumbo Frame Support: 10K
- ► Surge Protection: 2,000 VDC Support
- ► ESD Protection: 6,000 VDC Support
- ► Redundant Power Input Design: 12~48VDC
- ► Power Polarity Reserve Protect
- Overload Current Protection
- ► IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range: STD:-10° to 70°C, EOT:-40° to 75°C
- 5-Year Warranty

### INTRODUCTION

**Antaira Technologies' LNX-C500G series** is a compact 5-port industrial gigabit unmanaged Ethernet switch. The small form factor of this metal IP30 rated design is 30% smaller allowing for more a versatile implementation. The LNX-C500G series is equipped with 5\*10/100/1000 RJ45 Ethernet ports; with a backplane speed of 10gbps. The LNX-C500G series can handle high bandwidth applications in tight spaces.


The LNX-C500G series supports high EFT & ESD protection through the redundant power inputs that support reverse polarity and overload current protection. This product series supports DIN-rail as well as wall mountable orientations and provides operating temperature range models in STD: -10°C to 70°C and EOT: -40°C to 75°C. This is an industrial grade unit applicable for networking applications in factory automation, ITS, power/utility, water wastewater treatment plants, or any application that needs a compact solution.

#### DIMENSIONS

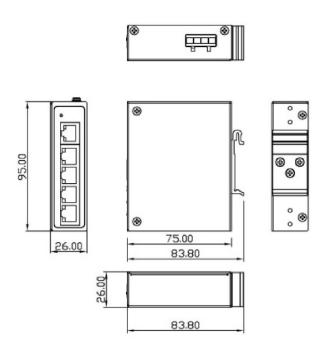



### **SPECIFICATIONS**

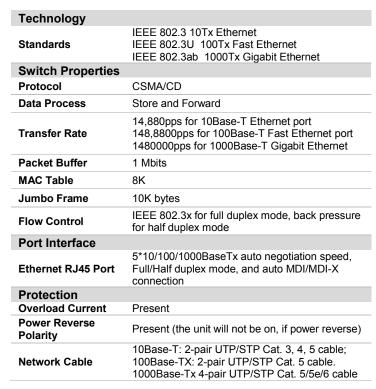

Mechanical Characteris	tics
LED Indicator	Per Unit: Power 1 & 2
Housing	Metal IP30 rated
Dimensions	26 x 95 x 75 mm
Weight	Unit: 1.0 lbs; Shipping: 1.5 lbs
Mounting	DIN-Rail; Wall-mount (optional)
Power Requirement	
Input Voltage	12~48VDC Redundant Input
<b>Power Connection</b>	1 removable 4-contact terminal block
Power Consumption	6.6 Watts
Environmental Limits	
Operating Temperature	STD: -10° to 70° C EOT: -40° to 75° C
Storage Temperature	-40°C ~ 85°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Class A
EMS	EN6100-4-2,3,4,5,6,8
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1, UL 61010-2-201
Compliance	NEMA TS1/TS2
Warranty	5 Years

### **ORDERING INFO**

LNX-C500G	Compact 5-Port Industrial Gigabit Ethernet Switch with 5*10/100/1000Tx	
LNX-C500G-T	Compact 5-Port Industrial Gigabit Ethernet Switch with 5*10/100/1000Tx; EOT -40° to 75° C	
Optional Access	pries	
DR-15-12	15W Industrial DIN-Rail Power Supply, 12VDC	
MDR-20-24	20W Industrial DIN-Rail Power Supply, 24VDC	
MDR-40-48	40W Industrial DIN-Rail Power Supply, 48VDC	
MDR-60-48	60W Industrial DIN-Rail Power Supply, 48VDC	
DR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC	



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Controllers category:

Click to view products by ANTAIRA manufacturer:

Other Similar products are found below:

CS1WCN223 CS1WCN713 CS1WKS001E 61F-11NH 61FGPN8DAC120 61F-GP-NT AC110 61F-GPN-V50-AC110 70177-1011 F03-03

HAS B F03-03 HAS C F03-31 81513201 81513535 81550401 FT1A-C12RA-W 88981106 H2CAC24A R88A-CAGA005S R88A
CRGB003CR-E R88ARR080100S R88A-TK01K DCN1-1 DTB4896VRE DTB9696CVE DTB9696LVE MR-50LF+ E53-AZ01 E53E8C

E5CWLQ1TCAC100240 B300LKL21 NE1ASCPU02EIPVER11 NE1SCPU01 NE1SDRM21U NSCXDC1V3 NSH5-232CW-3M

NT20SST122BV1 NV3Q-SW41 NV4W-ATT01 NV-CN001 OAS-160-N K31S6 K33-L1B K3TX-AD31A L595020 SRS2-1 G32X-V2K

26546803 26546805 26546831 CJ1W-OD204