Low profile toggle switches



5w21000x1712

DISTINCTIVE FEATURES

Threaded or plain bushing, with mounting plate Low profile Same height for single and double pole



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
- silver contacts (A): 4 A 30 VDC
- gold plated brass contacts (LD): 100 mA 30 VDC
- Minimum load :

Wave solderable only

- silver contacts (A): 100 mA 10 V
- gold plated brass contacts (LD) : 10 μ A 5 VDC 10 mA 50 mV
- Initial contact resistance : 20 m Ω max.
- Insulation resistance : 1,000 M Ω min. at 500 VDC
- Dielectric strength:
- 1,000 Vrms 50 Hz min. between terminals
- 2,000 Vrms 50 Hz min. between poles
- 2,000 Vrms 50 Hz min. between terminals and frame
- Electrical life at full load :
- silver contacts (A): 20,000 cycles
- gold plated brass contacts (LD): 50,000 cycles



GENERAL SPECIFICATIONS

- Low level or mechanical life: 100,000 cycles.
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)



MATERIALS

- Case and cover: PBT
- Actuator : brass, nickel plated
- Bushing: brass, nickel plated
- Contacts : A : silver, LD : brass, gold plated
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.

The company reserves the right to change specifications without notice.





Low profile toggle switches




PANEL CUT-OUT






ELECTRICAL FUNCTIONS





PCB MOUNTING



(χ)


POSITIONS AND CONNECTIONS


Bottom view	2.3	· 2 · 1 · 1 · 1 · 1 · 1 · 1 · 1 · 1 · 1	1.2
Function 6	ON	-	ON
Function 9	ON	OFF	ON
Function 7	MOM	OFF	MOM
Function 8	ON	OFF	MOM
Function 2	ON	-	MOM

Low profile toggle switches



BUILD YOUR PART NUMBER

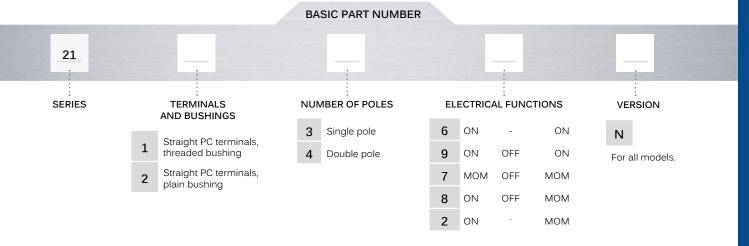

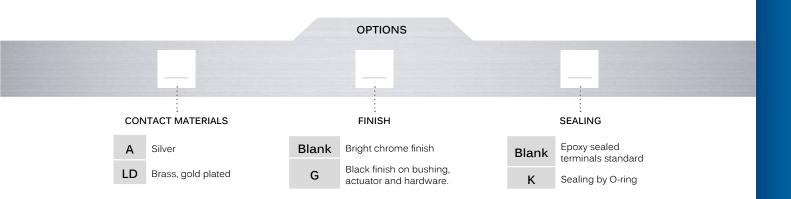



ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

- (1) Notice: please note that not all combinations of above numbers are available. Refer to the following pages for further information.
- Mounting accessories: standard hardware supplied with all models with threaded bushing: 2 hex nuts 8 mm (.314) across flats. Standard and special hardware available is presented in the "Hardware" section of website.

Low profile toggle switches

THREADED BUSHING - SINGLE POLE



	III 2-3	II	l 1-2
21136N	ON	-	ON
21139N	ON	OFF	ON
21137N	MOM	OFF	MOM
21138N	ON	OFF	MOM
21132N	ON	-	MOM

THREADED BUSHING - DOUBLE POLE



	III 2-3 5-6	II	1-2 4-5
21146N	ON	-	ON
21149N	ON	OFF	ON
21147N	MOM	OFF	MOM
21148N	ON	OFF	MOM
21142N	ON	-	MOM

PLAIN BUSHING - SINGLE POLE





	III 2-3	II	1-2
21236N	ON	-	ON
21239N	ON	OFF	ON
21237N	MOM	OFF	MOM
21238N	ON	OFF	MOM
21232N	ON	-	MOM


PLAIN BUSHING - DOUBLE POLE




	III 2-3 5-6	II	1-2 4-5
21246N	ON	-	ON
21249N	ON	OFF	ON
21247N	MOM	OFF	MOM
21248N	ON	OFF	MOM
21242N	ON	-	MOM

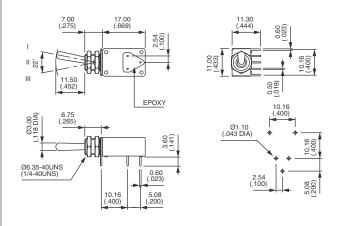

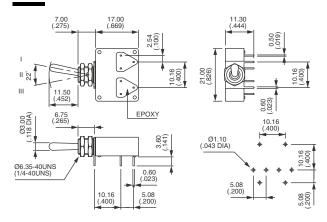

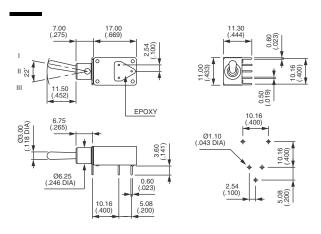

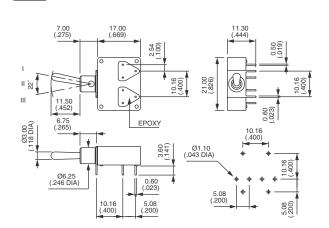

Low profile toggle switches

	CC	ONTACT MATERIALS	
BASIC	P/N		
A LD	Silver Brass, gold plated		
		FINISH	
BASIC	: P/N		
Blank G	Nickel plating on bushing, actuator and Black finish on bushing, actuator and ha		
		SEALING	
BASIC	P/N		
Epoxy s	sealed terminals are standard.		
Blank	No sealing except standard.		O-ring (1)
K	Bushing internally sealed by one O-ring washer U360). Protects the switch again dust.		2.8 Maxi (,110 MAX)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below:

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE 71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8391K108 8396K108 8824K14 8828K13 8835K3 8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04 AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9