


ADTS3 SERIES

3.5 x 6mm TACT SWITCH

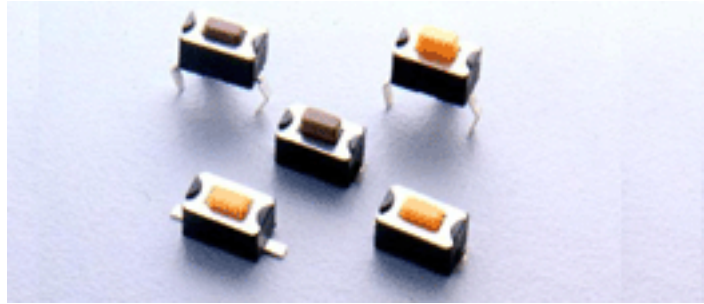

FEATURES

- Sharp click feel with a positive tactile feedback.
- Ultraminiature structure suitable for high density mounting. Economic but high reliability.
- Insert molded contacts with special treatment prevents flux build-up during soldering and permits auto-dipping.

MATERIALS

COVER:	Stainless Steel.
BASE:	UL94V-0 Nylon, High Temperature Thermoplastic. Color: Black
STEM:	UL94V-0 Nylon, High Temperature Thermoplastic. Color: Brown(160gf), Red(260gf), Salmon(320gf), Yellow(520gf)
DOMECONTACT:	Stainless with silver cladding.
TERMINALS:	Brass with silver plated.

GENERAL SPECIFICATIONS

ELECTRICALS

Electrical life:	50,000 cycles for 160gf, 320gf. 30,000 cycles for 260gf, 520gf.
Rating:	50 mA, 12 VDC.
Contact resistance:	100 milliohms max.
Insulation resistance:	100 megohms min. 500 VDC.
Dielectric Strength:	250 VAC /1 minute.
Contact Arrangement:	1 pole 1 throw.

MECHANICALS

Actuation Force:	520 ± 130gf Yellow (Y) 320 ± 80gf Salmon (S) 260 ± 50gf Red (R) 160 ± 50gf Brown (N)
Stroke:	0.25 + 0.2 mm - 0.1 mm
Operating Temperature Range:	-25°C to + 70°C
Storage Temperature Range:	-30°C to + 80°C
Vibration resistance:	MIL-STD-202F METHOD 201A. Frequency: 10-55-10Hz/1minute. Directions: X, Y, Z, three mutually perpendicular directions. Time: 2 hours each direction. High reliability.
Shock resistance:	MIL-STD-202F METHOD 213B. CONDITION A. Gravity: 50G (peak value), 11 msec. Direction and times: 6 sides and 3 times in each direction. High reliability.


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SOLDERING PROCESSES


HAND SOLDERING: 320°C max. for 2.5 seconds max. (30 watt iron).

REFLOW SOLDERING: 260°C max.

WAVE SOLDERING: 360°C max. for 5 seconds max (1.6 mm Board thickness).

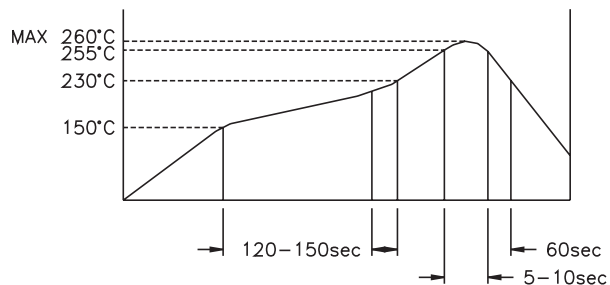

CIRCUIT



HOW TO ORDER

ADTS



3



V



B = Tube Package
T/R = Tape & Reel
□ = Bag for Thru-hole type

V = Lead Free Solerable

Color Of Stem For Operating Force:

N = Brown, 160gf
R = Red, 260gf
S = Salmon, 320gf
Y = Yellow, 520gf

Dimension H:

1 = 4.3mm
2 = 5.0mm

Product Size: 3 = 3.5 x 6mm


M: Surface Mounting Type

ML: Surface Mounting Type


□ : Through Hole Type

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


ADTS3

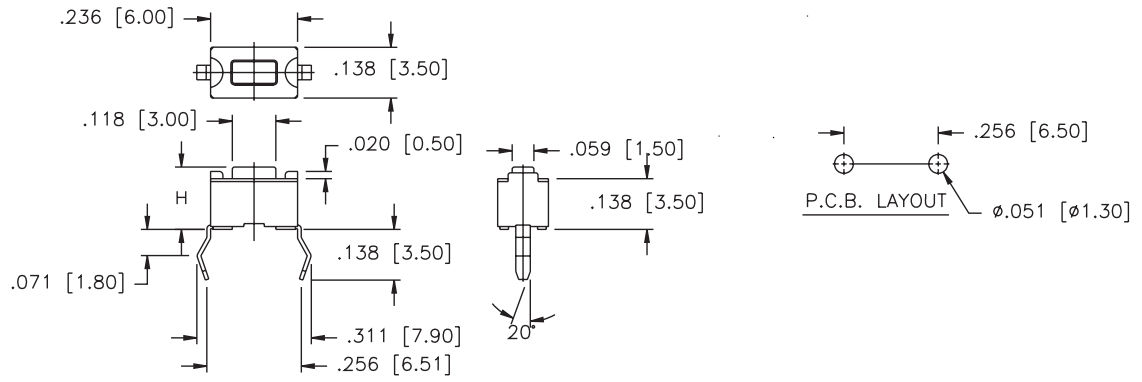

ADTSM3

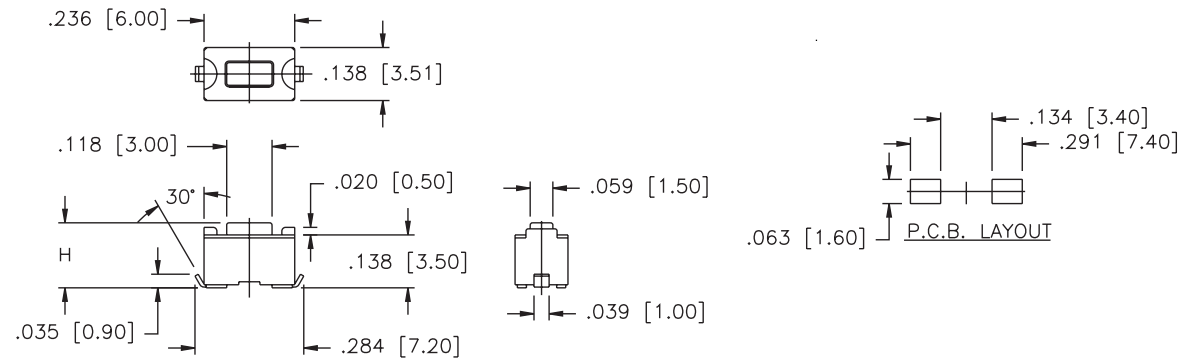

ADTSM13

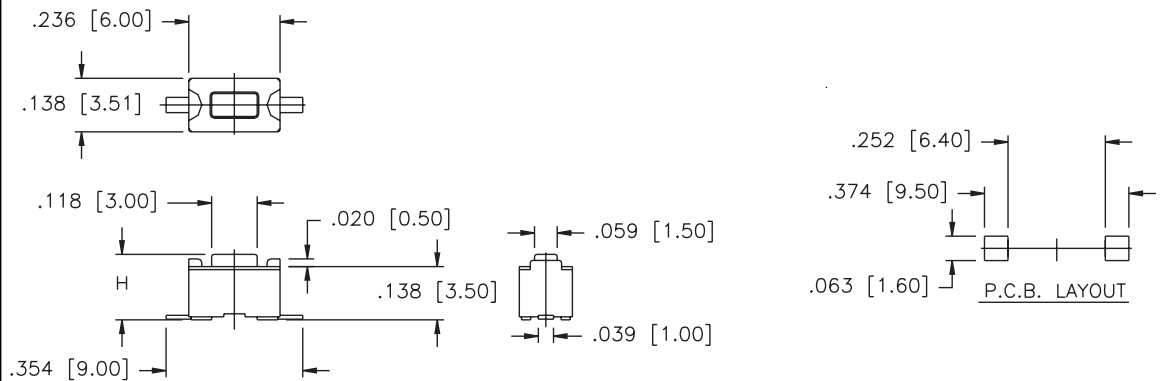

PACKAGING

Tube: 135 pcs/tube
 ADTM-31 - T/R: 1800 pcs/reel
 ADTM-32 - T/R: 1600 pcs/reel
 Bulk: 1000 pcs/bag

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Tactile Switches](#) category:

Click to view products by [Apem](#) manufacturer:

Other Similar products are found below :

[KMR633NG LFG](#) [5GTH92001](#) [5GTH9202242](#) [6426-201-11343](#) [MJ1226](#) [MJTP1109B](#) [MJTP1138EAUTR](#) [MJTP1230BL](#) [MJTPSHW](#)
[GS6.90F300QP](#) [1-1977223-0](#) [1-1977120-4](#) [ADTSA62NV](#) [ADTSA62RV](#) [ADTSA63KV](#) [ADTSA644NV](#) [ADTSM24NVTR](#) [ADTSMW66NV](#)
[ADTSMW67RV](#) [ATM533VTR](#) [1571300-3](#) [B3F-3123](#) [B3F-6055A](#) [B3F-B32-01-KIT](#) [1977177-8](#) [1977266-1](#) [2-1977223-4](#) [2-1977223-7](#)
[ADTS644KV](#) [ADTSA61RV](#) [ADTSA62KV](#) [ADTSA63NV](#) [ADTSA63RV](#) [ADTSA65NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#)
[ADTSM31RVTR](#) [ADTSM32NVTR](#) [ADTSM61YVTR](#) [ADTSM63SVTR](#) [ADTSM644KVTR](#) [ADTSMW64RV](#) [ADTSMW69NV](#)
[FSMRA4JHA04](#) [GS4.70F300QP](#) [D38999/20JJ37SA](#) [TL1105B](#) [TL1105J](#) [ATH447K2Q](#) [ATM534VTR](#)