


New!

AV SERIES SECURITY PUSHBUTTON SWITCHES

SPECIFICATIONS	FEATURES
<p>Contact ratings: Max.resistive loads: 3 A 250 VAC, 6 A VAC & 3 A 24 VAC or VDC</p> <p>Initial contact resistance: 10 milliohms max. at 1 A, 2 V</p> <p>Insulation resistance: 1000 megohms min. at 500 VDC</p> <p>Dielectric strength: 3000 V rms min. between terms. & frame</p> <p>Electrical life: 10,000 cycles at full load, 50,000 cycles min. at 1 A 24 VAC of VDC</p> <p>Mechanical life: 1,00,000 cycles min.</p> <p>Operating temperature range: -20°C to +55°C</p> <p>Solder heat resistance: 300°C max. for 5 seconds</p>	<ul style="list-style-type: none"> • .866" (22 mm) dia. models. • Double pole alternate action (ON - ON). • Standard models provide protection per IP54. • Optional sealing options provide protection to IP65. • Extremely rugged and durable.
	<p>MATERIALS</p> <p>Contacts: Silver</p> <p>Bushing & Actuator: Nickel plated brass (std'd)</p> <p>Case: PBT Hex. Mounting Nut: Nickel plated brass</p>

ORDER FORMAT: For complete model no., fill in 2 empty boxes with selected options shown below. Example of complete model no. -

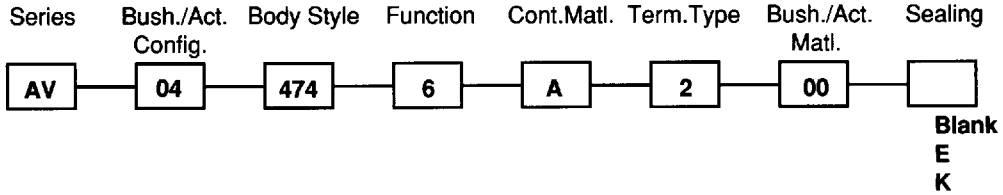



AV044746A200

Other Bushing/Actuator materials available - flat thermoplastic Actuators available - Actuator marking available - consult factory.

22mm


Bushing/Actuator configuration

Solder lug/quick connect terminals

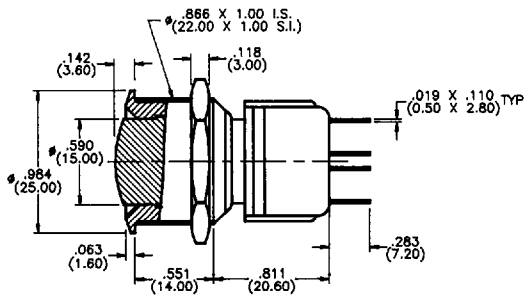


04 curved Act.& Bush.


H

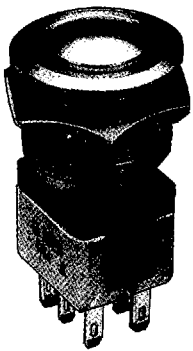


**AV044746A200
(Model shown)**



Blank - no sealing (std'd)




E - ① Internal seal meets IP65



K - ① Internal seal & ② front panel seals meet IP65

Sealing

Min. dimensions for matrix mounting: 1.181" (30mm) x 1.181" (30mm).



Mounting Hole

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pushbutton Switches](#) category:

Click to view products by [Apem](#) manufacturer:

Other Similar products are found below :

[8940K2012](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#)
[67021K512](#) [67081K512X](#) [701PB580](#) [7190K101](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#)
[MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [95-313.000](#)
[9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#) [PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBMMNGA](#)
[A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#)