

□ 50 million cycles

No moving mechanical parts to wear out.

profile is an asset for this type of mounting.

Advantages of under-panel mounting

- Robustness
- Sealing
- Easy to clean flat surface
- Easy panel marking


Custom disk colours and marking

Marking flexibility based on digital printing.


* For other non conductive materials, consult APEM.




New!

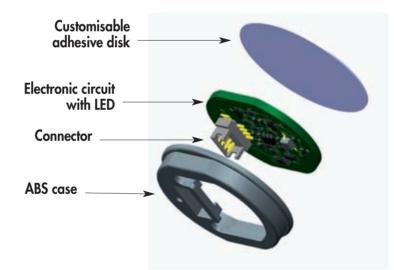

Mounting of a CG switch







CG series

Capacitive switches for underlay applications

Specifications

B2



- Activated by the touch of a finger Even with surgeon gloves
- □ 50 million cycles
- Auto-calibration function Ensures the sensor adapts to changing external environments
- Mounting under max. 6 mm glass or 4 mm polycarbonate panels

ENVIRONMENTAL SPECIFICATIONS

New!

- Triggered by flowing water
- Temperature range : -40°C to +70°C
- Adhesive and connector resistant to vibrations

ELECTRICAL AND GENERAL SPECIFICATIONS

- Supply voltage : 5 to 24VDC max.
 Supply current : 15mA max. (12V)
 Max. current/voltage rating : 200mA 24VDC
 Life expectancy : 50 million cycles
- Switch resistance ON : 1 Ohm max.
- Power consumption : 10mA max. mode OFF

147

• Output type : NPN

MATERIALS

• Case : ABS

• Sealing : epoxy

Wiring for mating connector Harwin M30-1100400

Pin 1 : output

- Pin 2 : GND Pin 3 : +LED
- Pin 4 : +VCC

Mating harness (connector + wires) available : see «Accessories» at the end of the series.


Wiring diagrams			
	Non-illuminated -	Illuminated 1 LED	
		Output indicator	Independent
OFF-ON OFF - MOM	VCC Output	VCC Output	+LED VCC Output

.

/!\

This switch should not be used in safety applications.

()

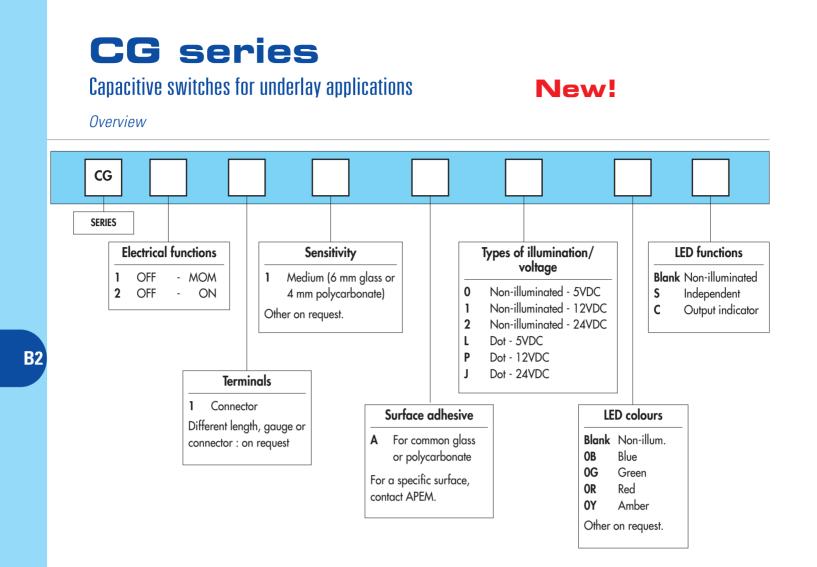

۲

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



۲

NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.



Packaging unit : 20 pieces

۲


CG series

New!


Capacitive switches for underlay applications

Illuminated or non-illuminated

۲

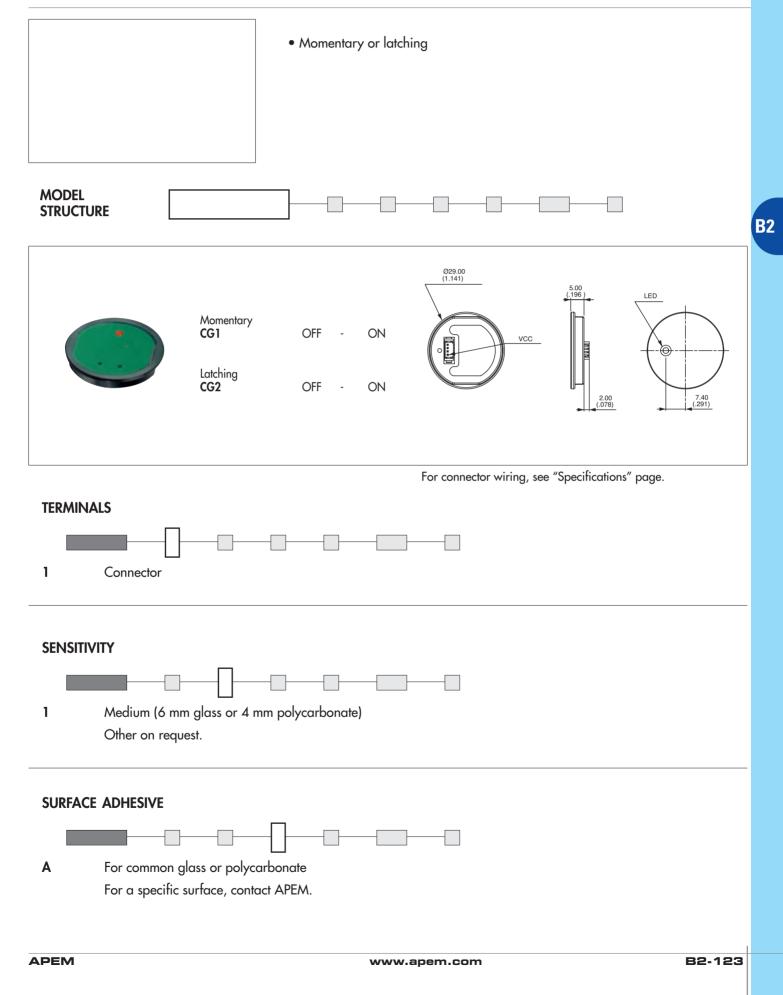


-🐼-

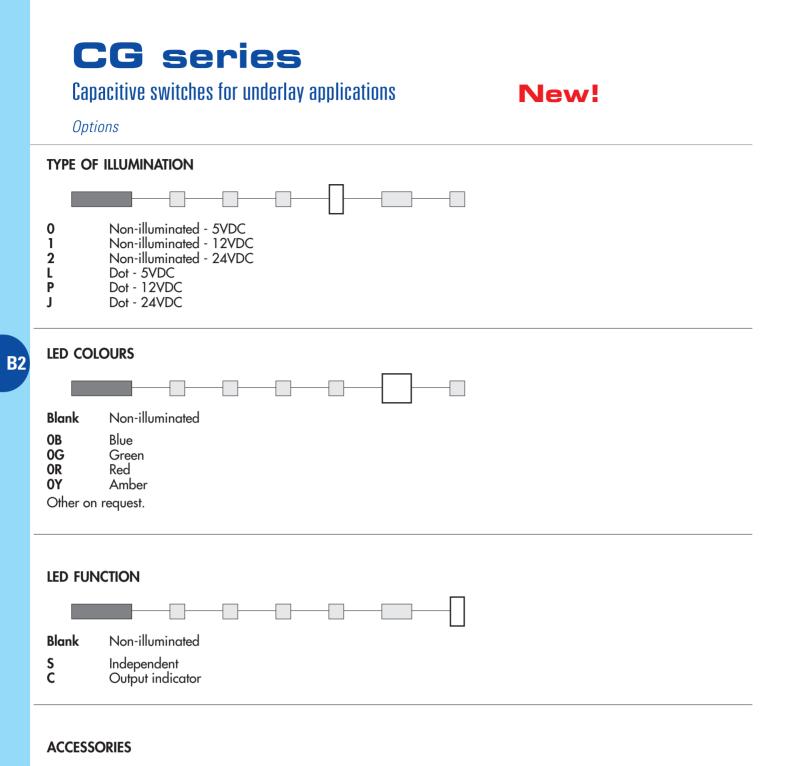


Order separately.

۲



Mating harness for independent LED (version S)



Mating harness for all other versions

Connector : Harwin M30-1100400 Wires : AWG28, 150 mm

->

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below :

 8940K2012
 LW1L-M1C10V-A
 LW1L-M1C70-A
 LW2L-A1C20M-GD
 LW2L-M1C20M-A
 60324L
 M22-D-R-GB0/K11
 M7E-HRN2

 67021K512
 67081K512X
 701PB580
 7190K101
 7199K101
 810K12910
 810KSV30B
 MML21EA2ADK
 MML21KA3ABK

 MML23KA3AC05K-001
 MML23KW3AA01W
 8418K2
 8442K3
 8450K1
 860K11911T01A
 861901
 861K11911T01A07

 861K13810T00A14
 861K13911
 8646AB6X718UL
 8646ABUL
 9001KXRK
 907AYY100
 PMHD155A1
 95-313.000

 9533CD4+U574+U4922
 95-414.000
 99-450.837
 99-453.837
 PV3H2B0NN-341
 1203MRA
 A22NZBGANGA
 A22NZBMMNGA

 A22NZBNANGA
 A22NZMPATRA
 A2PMA1X03EC56
 A3A-5123-02
 A3A-7140
 A3A-7340
 A3U-TMW-A2C-5M
 A595