DPS9 SERIES PUSHWHEEL SWITCHES





FEATURES

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- .315"(8mm) wide pushwheel switches with extra large visible readout characters.
- Bi-directional snap action detent pushbutton mechanism.
- Black housing and drum with white printing.
- Gangable front mounting models with spacers and side covers.
- Gold wiping action contacts.
- P.C. board options include solderable lands.

_	_	_	_	_	_	_	-	_			_	_		-
п	יט	•	a	c.	u	_	•	IFI		Λ	п		N	16
u	г,	О.	3	u	_	_	•		•	~		u	13	u

Panel mounting hole:

Height 1.300"(33mm)
Width 3.315"(8mm)

Installed depth with p.c. board:

Short 1.535"(39mm) Long 1.968"(50mm)

Insertion from front yes
Insertion from rear no

CODES

Code	e į	positio	ns marking	
111	Decimal	10	0-9	see truth tables
131	BCD	10	0-9	see truth tables
137	BCD comp	10	0-9	see truth tables
141	BCD + comp	10	0-9	see truth tables
301	Hexadecimal	16	0-9, A-F(0-15)	see truth tables
307	Hexadec com	p 16	0-9, A-F(0-15)	see truth tables
400	change-over	10	++etc	see truth tables

ELECTRICAL DATA

Operating voltage: 40 V max.
Contact load, static: 1 A max.
Contact load, dynamic: 100 mA max.
Contact resistance (type AK): less than 100 mOhm

TECHNICAL DATA

Operating temperature range: -20°C to 80°C

Electric life, min. switching cycles greater than 1,000,000

Actuation force, approx (oz.): 16 Weight, approx. (grams): 6.5

Character ht: 10 digit - .268" (6.8mm) 16 digit - .169" (4.3mm)

Audible click yes Vibration DIN IEC 68, parts 2-6 yes Shock DIN 40046, part 7 yes **MATERIALS**

Body: PPO

PC board: FR 4 DIN 40802

IEC 249-2, Contact surface gold over nickel on copper

Sliding contact: Gold over nickel

on copper alloy

STANDARD COLORS

Housing, Drum, Printing

 $2 = black \ 3 = white \ 2,2,3$

Other special features are available upon

request including:

Factory or customer set stops (10 digit models)

L.E.D. illumination (transparent drum)

Red digits

Decimal point

Special codes or printing

Gray housing

See sockets at end of Pushwheel section.

TRUTH TABLES

	CODE 131 BCD										
	С	1	2	4	8						
0	•										
1	•	•									
1 2 3 4 5	•		•								
3	•	lacktriangle	•								
4	•			•							
5	•	lacktriangle		lacktriangle							
6	•		•	•							
7	•	lacktriangle	•	lacktriangle							
8	•				•						
9	•	•			•						

CODE 137 BCD COMP.										
	С	<u>1</u>	2	4	8					
0	•	•	•	•	•					
1	•		lacktriangle	lacktriangle	•					
2	•	•		•	•					
3	•			lacktriangle	lacktriangle					
4	•	•	•		•					
5	•		•		•					
6	•	•			•					
7	•				lacktriangle					
8	•	•	•	•						
9	•		•	•						

CODE 400 CHANGE-OVER											
	С	A+	A-								
+	•	•									
_	•		•								
+	•	•									
•	•		•								
+	•	•									
•	•		•								
+	•	•									
·	•		•								
+	•	•									
-	•		•								

HE	(AE	DEC	MIC	ΑL							
		HEXADECIMAL									
	1	2	4	8	С						
0					C • • • • • • • • • • • • • • • • • • •						
1	•				•						
0 1 2 3 4 5		•			•						
3	•	•			•						
4											
	•		•		•						
6 7		•	•		•						
7	•	•	•		•						
8				•							
9	•			•	•						
Α		lacktriangle		•							
В	•	•		•	•						
A B C D			•	_	•						
D	•		•	•	•						
E F		•	•	•							
F	•	•	•	•	•						

	CODE 307												
HE	HEXADEC. COMP.												
	С	1	2	4	8								
0	•	•	•	•	•								
1	•		lacktriangle	•	•								
2 3	•	•		•	•								
	•			•	•								
4 5	•	•	•		•								
	•		•		•								
6	•	lacktriangle			•								
7	•				•								
8	•	•	•	•									
9	•		•	•									
Α	•	•		•									
В	•			•									
C D	•	•	•										
D			•										
E F	•	•											
F	•												


	DE CIN										
	С	0	1	2	3	4	5	6	7	8	9
0	•	•									
1	•		•								
2	•			•							
3	•				•						
4	•					•					
5	•						•				
6	•							•			
7	•								•		
8	•									•	
9	•										•


CODE 141 BCD + COMP.											
	C 1	2	4 8	1	2	4	8				
0	•			•	•	•	•				
1	• •				•	•	•				
2	•	•		•		•	•				
3	• •	•				•	•				
4	•		•	•	•		•				
4 5	• •		•		•		•				
6	•	•	•	•			•				
7	• •	•	•				•				
8	•		•	•	•	•					
9	• •		•		•	•					

MECHANICAL OUTLINE WITH PANEL CUT-OUT & MOUNTING

n = number of decades

Dimensions in brackets apply when DPS910PB2 side covers are used.





8

8

1 8

8

8

A-

7 8

5 6


4

4

4

4

9



PIN CONNECTIONS

 The switching mode is shorting - i.e. - even during actuation, at least one output is connected to

input C.

131 2 С 1 2 <u>1</u> С 137 + <u>T</u> 4 2 С 8 141 2 **301** 2 С 1 <u>1</u> 2 С AK • **307** + 400 С Α +

0

1

111bl	+	С	0	1	2	3	4	5	6	7	8	9		-


2 3


С


Pitch .079"(2mm)

Т

DPS9 SERIES PUSHWHEEL SWITCHES

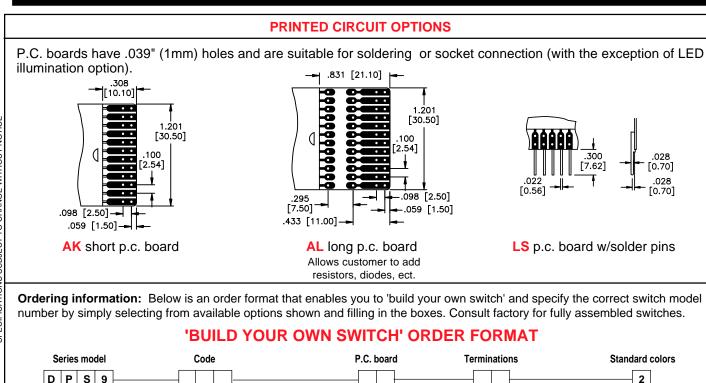

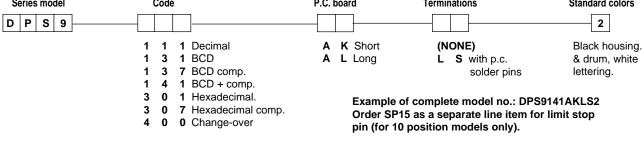

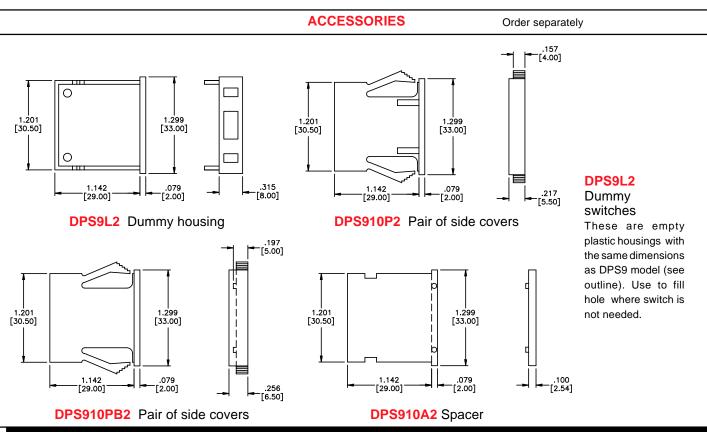

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thumbwheel Switches & Pushwheel Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below:

PICOD131ALULS2 A7SS-107-PM DGAN-031-B 1437603-2 DPS10131AL2 DPS10301AK DPS8111AK DPS8137AK2 1437603-7 A7M
1P B5LS B5LS 3-1437603-8 DGBN-036-B DPS10131AK DPS910A2 1-1437602-8 SH6G137AKLS2 1-1437603-1 SMCL2

SMCD137AK SP1.5 DPS8111AK2 TW01RED14 TW01BLK14 84212014 84212013 HTWF-1A12A21 301419100 302109002

302329N00 311100001 312100100 312300000 332300003 337100000 342300001 311100000 312100000 313100000 313110003

321400100 322300000 323100000 332100100 333100110 347100000 301119000 303109101 332710P00