

# JD SERIES KEYLOCK SWITCHES


## 4 TUMBLER LOCK

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



SPECIFICATIONS	FEATURES
<p><b>Contact ratings:</b> Max. resistive loads: 4A @ 125 VAC, 2A @ 250 VAC</p> <p><b>Initial contact resistance:</b> 20mΩ max.</p> <p><b>Insulation resistance:</b> 10,000 megohms min.</p> <p><b>Dielectric strength:</b> 1000 V rms min.</p> <p><b>Operating temperature range:</b> -30°C to +85°C</p> <p><b>Electrical Life:</b> 6,000 cycles at full load</p>	<ul style="list-style-type: none"> <li>● <b>Single and double pole options.</b></li> <li>● <b>Up to four positions.</b></li> <li>● <b>Momentary and/or maintained switching.</b></li> <li>● <b>Multiple key-pull position options.</b></li> <li>● <b>45° or 90° indexing.</b></li> </ul>
<p><b>AGENCY RECOGNITION</b></p> <div style="text-align: center;"> </div>	<p><b>SPECIFICATIONS</b></p> <p><b>Contacts:</b> Gold over silver over copper alloy</p> <p><b>Lock:</b> Nickel plated zinc alloy</p> <p><b>Case:</b> Glass filled polyester Mounting Nut: Nickel Plated zinc alloy</p> <p><b>Keys:</b> Nickel plated brass (2 keys with code stamped on case)</p>

ORDERFORMAT:	Series	Lock Function	Key Code
<p>For complete model no., fill in boxes with selected options shown below. Example of complete model no. - <b>JD7509OA126</b></p>	<div style="border: 1px solid black; padding: 2px; width: 40px; margin: 0 auto;">JD</div>	<div style="border: 1px solid black; padding: 2px; width: 100px; margin: 0 auto;"> <p style="margin: 0;"><b>Maintained</b></p> <p style="margin: 0;">7509A</p> <p style="margin: 0;">7509B (STD)</p> <p style="margin: 0;">7509C</p> <p style="margin: 0;">7509D</p> <p style="margin: 0;">7509E</p> <p style="margin: 0;">7509F (STD)</p> <p style="margin: 0;">7509G</p> <p style="margin: 0;">7509H</p> <p style="margin: 0;">7509I</p> <p style="margin: 0;">7509J (STD)</p> <p style="margin: 0;">7509N</p> <p style="margin: 0;">7509O (STD)</p> <p style="margin: 0;">7509P</p> <p style="margin: 0;">7509Q (STD)</p> <p style="margin: 0;">7509R</p> <p style="margin: 0;">7509S (STD)</p> <p style="margin: 0;">7509DAB</p> <p style="margin: 0;"><b>Momentary</b></p> <p style="margin: 0;">7510A (STD)</p> <p style="margin: 0;">7510B</p> <p style="margin: 0;">7510E (STD)</p> <p style="margin: 0;">7510F</p> <p style="margin: 0;">7510I (STD)</p> <p style="margin: 0;">7510J</p> </div>	<div style="border: 1px solid black; padding: 2px; width: 100px; margin: 0 auto;"> <p style="margin: 0;"><b>Key Code</b></p> <p style="margin: 0;">A126 (STD)</p> <p style="margin: 0;">Other Codes Available</p> </div>

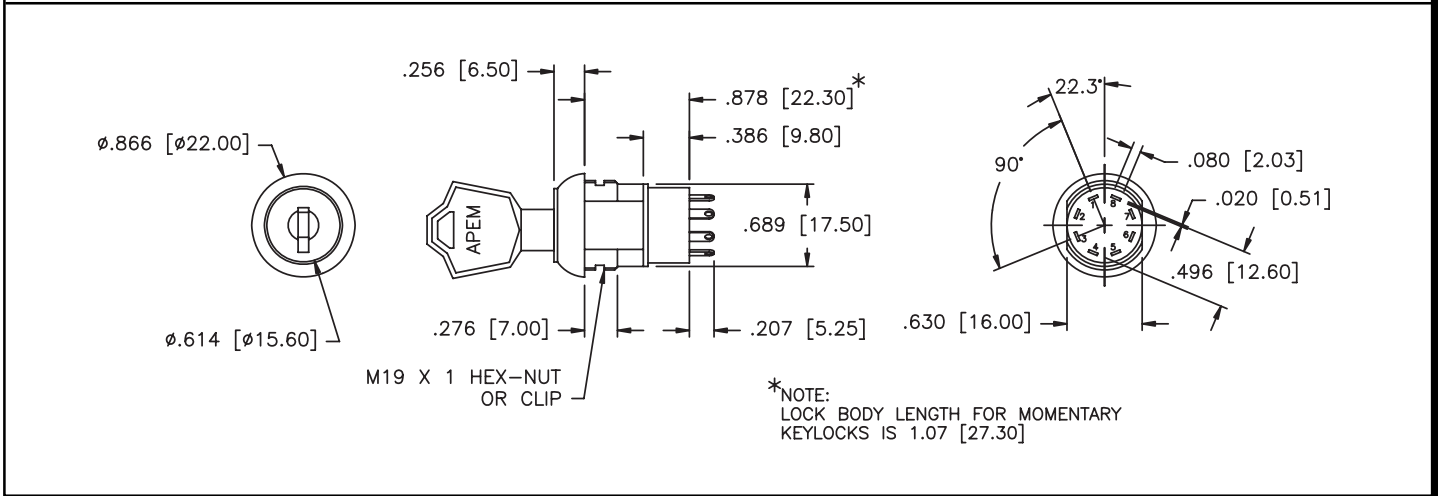

# JD SERIES KEYLOCK SWITCHES

## 4 TUMBLER LOCK

R

LOCK CONFIGURATION (View from Front)	INDEXING	NO. POLES	MODEL NUMBER	CONNECTED TERMINALS				KEY PULL POSITIONS
				POS. 1	POS. 2	POS. 3	POS. 4	
	45°	SP	JD7509A	8-1	1-2	2-3	—	POS 1
		DP	JD7509B (STD)	8-1 4-5	1-2 5-6	2-3 6-7	—	
	45°	SP	JD7509C	8-1	1-2	2-3	—	POS 3
		DP	JD7509D	8-1 4-5	1-2 5-6	2-3 6-7	—	
	45°	SP	JD7509E	8-1	1-2	2-3	—	POS 1 & 3
		DP	JD7509F (STD)	8-1 4-5	1-2 5-6	2-3 6-7	—	
	45°	SP	JD7509G	8-1	1-2	7-8	—	POS 1
		DP	JD7509H (STD)	8-1 4-5	1-2 5-6	7-8 3-4	—	
	45°	SP	JD7509I	8-1	1-2	7-8	—	POS 1, 2 & 3
		DP	JD7509J (STD)	8-1 4-5	1-2 5-6	7-8 3-4	—	
	90°	SP	JD7509N	8-1	1-3	—	—	POS 1
		DP	JD7509O (STD)	8-1 4-5	1-3 5-7	—	—	
	90°	SP	JD7509P	8-1	1-3	—	—	POS 2
		DP	JD7509Q (STD)	8-1 4-5	1-3 5-7	—	—	
	90°	SP	JD7509R	8-1	1-3	—	—	POS 1 & 2
		DP	JD7509S (STD)	8-1 4-5	1-3 5-7	—	—	
	45°	DP	JD7509DAB	8-1	1-2	2-3	3-4	POS 1, 2, 3 & 4
	45° (MOMENTARY)	SP	JD7510A (STD)	8-1	1-2	—	—	POS 1
		DP	JD7510B	8-1 1-2	1-2 5-6	—	—	
	45° (MOMENTARY)	SP	JD7510E (STD)	8-1	1-2	7-8	—	POS 1
		DP	JD7510F	8-1 4-5	1-2 5-6	7-8 3-4	—	
	45°/90° (MOMENTARY)	SP	JD7510G	7-1	1-2	6-7	—	POS 1 & 3
	45° (MOMENTARY)	SP	JD7510I (STD)	8-1	1-2	7-8	—	POS 1
		DP	JD7510J	8-1 4-5	1-2 5-6	7-8 3-4	—	

**LEGEND**

- = KEY PULL POSITIONS
- = DETENT POSITIONS
- = MOMENTARY POSITIONS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Keylock Switches](#) category:*

*Click to view products by [Apem](#) manufacturer:*

Other Similar products are found below :

[89496-09](#) [89638-00](#) [58J9A90-01C02N](#) [719-0022-020](#) [719-0122-000](#) [719-0201-000](#) [719-0202-000](#) [719-0702-000](#) [84800-04](#) [88521-00](#)  
[GKNC33L](#) [GKNC3L](#) [PVA2OAH5](#) [14-136.025K](#) [14-235.022K](#) [AS6H-2K2A](#) [AS6M-2K1B](#) [1571487-1](#) [HW4K-2BF20](#) [JD7510H](#)  
[K6SLYE1.55NL327SD](#) [KH3C-20C](#) [89638-05](#) [A028301](#) [A165K-J2AL-2](#) [A165K-J2M-2](#) [A165K-J3AMR](#) [A165K-J3M](#) [205389 \(PAYGUARD](#)  
[BUTTON PAD\)](#) [2SWK131AL102](#) [30PA39-AML](#) [LW6MJ-2C64WWB](#) [AS6M-2K1A](#) [51-401.036D](#) [51-401.036K](#) [51-414.036D](#) [HW1K-](#)  
[3HF20](#) [4370039](#) [Y1112-2027CLFT](#) [4B01H322NCFQ](#) [51-155.025D](#) [51-195.025D](#) [51-378.AD](#) [51-404.036D](#) [51-405.036D](#) [51-415.036D](#) [1-](#)  
[1437597-8](#) [86945-05](#) [88169-05](#) [719-0204-000](#)