SPECIFICATIONS

Insulation resistance: 100 megohms min. at 100 VDC

Dielectric strength: 100 VAC for 1 minute

Electrical life: 10,000 cycles min.

Operating temperature range: -10°C to +60°C

Actuation force: 200g ± 100g

Solder heat resistance: Reflow - 260°C max. for 1 min.

Manual - iron temperature 305 °C max. for 6 seconds.

Washing not recommended

FEATURES

- Ultra-compact size.
- Low Profile.
- Surface mounting with restraining bosses.

MA Series

Microminiature Memory Card Slide Switches

Reflow or hand solderable.

MATERIALS

Contacts: Silver plated beryllium copper

Terminals: Silver plated brass

Base: Liquid crystal polymer Cover: Tin plated steel


Actuator: Liquid crystal polymer

MODEL NO.

MA12R



RIGHT ANGLE ACTUATOR

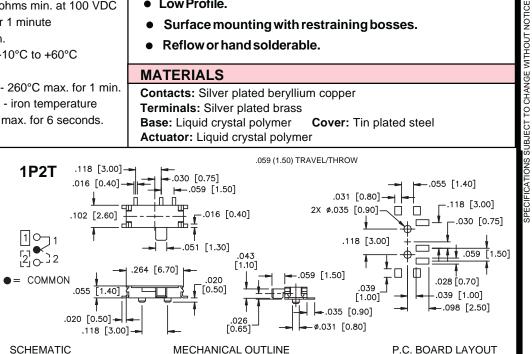



MODEL NO.

MA12R/TR MA13R/TR

Same as above models except supplied on tape & reel as shown.

Model No.	Dim. A	Dim. B	Dim. C
MA12RTR	.630 (16.0)	.217 (5.5)	.646 (16.4)
MA13R/TR	.945 (24.0)	.453 (11.5)	.960 (24.4)





CARRIER TAPE

REEL DIMENSIONS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHS133K MHSS1104A MMD GH49S010001 MSS12A EPS1PC1 1825074-1 1825160-3 1825167-2 1825289-7 K232CB 25139NLDB 25449NAH SLB1240R45 1825078-1 1825080-4 1825269-1 1825270-2 STS141RA04 T2215BEN506 GH46P000001 GH46W000001 GH49P010001 25339NA M42A TG36P000000 TG36P000050 AYZ0202AG 47227LFE 49331L 50208L L203091MS02Q 4-1437581-7 X2225CR-437W 49329L 1101M1S3ZB8E2 1-1437581-1 MSS2225G04 TG39W000000 1825075-1 MSS42G TG36WS80065 T105S1CWZBE SLB124145 SLB1280R5 SLB1340R45 25136NLDB