
MSL Series

Single Pole Multi-Position Slide Switches

Note: up to 10 positions available - contact factory. Minimum quantities may apply.

SPECIFICATIONS FEATURES Bifurcated wiping contact design. Contact rating: 200 mA at 125 VAC or 30 VDC **Epoxy sealed terminals.** Initial contact resistance: 30 milliohms max. Wash-through open frame construction. Contact timing: Non-shorting Reinforcing mounting legs. Insulation resistance: 100 megohms max. at 500 VDC Dielectric strength: 500 volts RMS at sea level Threaded mounting holes standard - 4-40NC-2B. Electrical life: 10,000 cycles min. **MATERIALS** Operating temperature range: -10°C to +60°C Contacts & terminals: Silver plated Actuation force: 250g ± 100g Housing: Tin/lead plated steel Actuator: Steel Solder heat resistance: 260°C max. for 3 seconds Base: Phenolic laminated sheet Solvent washing permissible Slider: High temperature thermoplastic Terminal seal: Epoxy

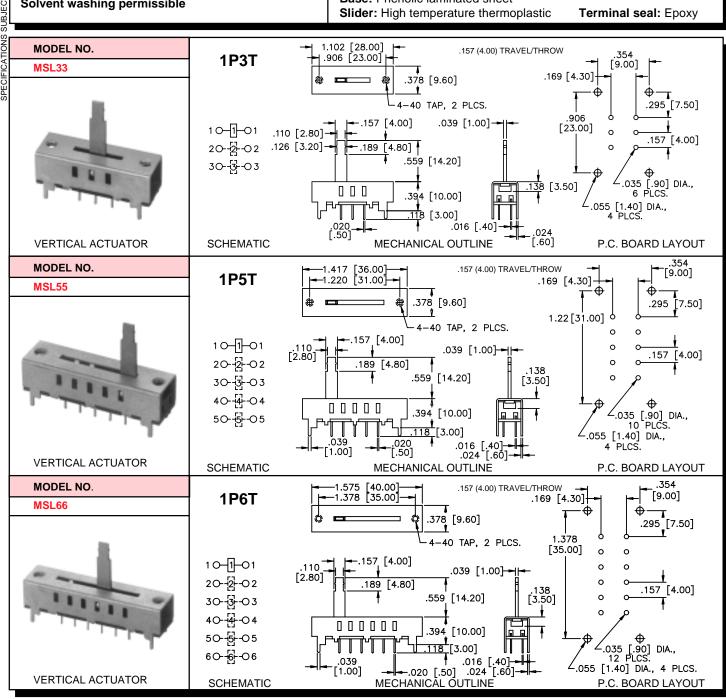

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHS133K MHSS1104A MMD GH49S010001 MSS12A EPS1PC1 1825074-1 1825160-3 1825167-2 1825289-7 K232CB 25139NLDB 25449NAH SLB1240R45 1825078-1 1825080-4 1825269-1 1825270-2 STS141RA04 T2215BEN506 GH46P000001 GH46W000001 GH49P010001 25339NA M42A TG36P000000 TG36P000050 AYZ0202AG 47227LFE 49331L 50208L L203091MS02Q 4-1437581-7 X2225CR-437W 49329L 1101M1S3ZB8E2 1-1437581-1 MSS2225G04 TG39W000000 1825075-1 MSS42G TG36WS80065 T105S1CWZBE SLB124145 SLB1280R5 SLB1340R45 25136NLDB