

# NDS series

Standard profile • dual in line switches



## DISTINCTIVE FEATURES

1 to 12 Way

Self-cleaning wiping contacts

Gold plated terminals

Washable with tape seal



## ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Storage Temperature: -40 °C to +85 °C (-40 °F to +185 °F)
- Washable (with tape seal)



## ELECTRICAL SPECIFICATIONS

- Max. Current/Voltage Rating:
  - Switching: 25 mA 24 VDC
  - Contact rating: 100 mA 50 VDC
- Initial Contact Resistance: 50 mΩ max
- Insulation Resistance: 100 MΩ min. at 500 VDC
- Dielectric Strength: 500 VAC min.
- Electrical Life: 2,000 cycles



## MECHANICAL SPECIFICATIONS



- Operating force: 1,000 gf (9.8 N) max



## MATERIALS

- Case & Actuator: PBT
- Base: PA66
- Contact: Gold plated
- Terminal: Gold plated brass
- Protection tape: Polyimide

The company reserves the right to change specifications without notice.

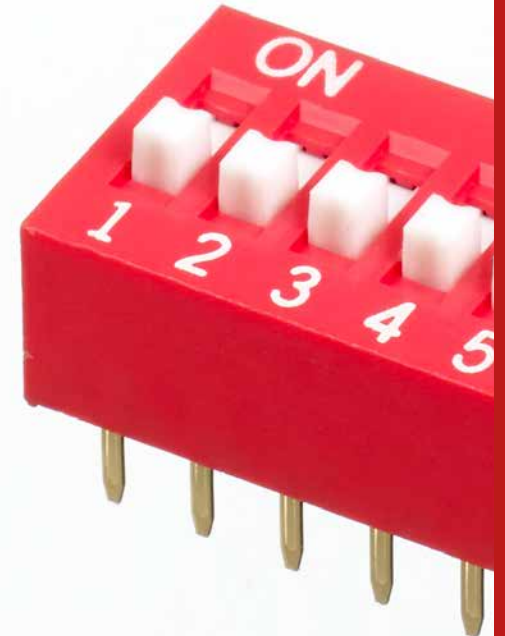

# NDS series

Standard profile • dual in line switches




## PACKAGING

IC TUBE THROUGH-HOLE

Number of ways	No tape seal	With tape seal
1	120 pcs	110 pcs
2	72 pcs	70 pcs
3	51 pcs	50 pcs
4	40 pcs	39 pcs
5	32 pcs	
6	27 pcs	
7	24 pcs	
8	21 pcs	
9	19 pcs	
10	17 pcs	
12	14 pcs	



## CIRCUIT




2,3,4,5,6,7,8,9,10,12 way only




## PCB LAYOUT

THROUGH-HOLE




## BUILD YOUR PART NUMBER

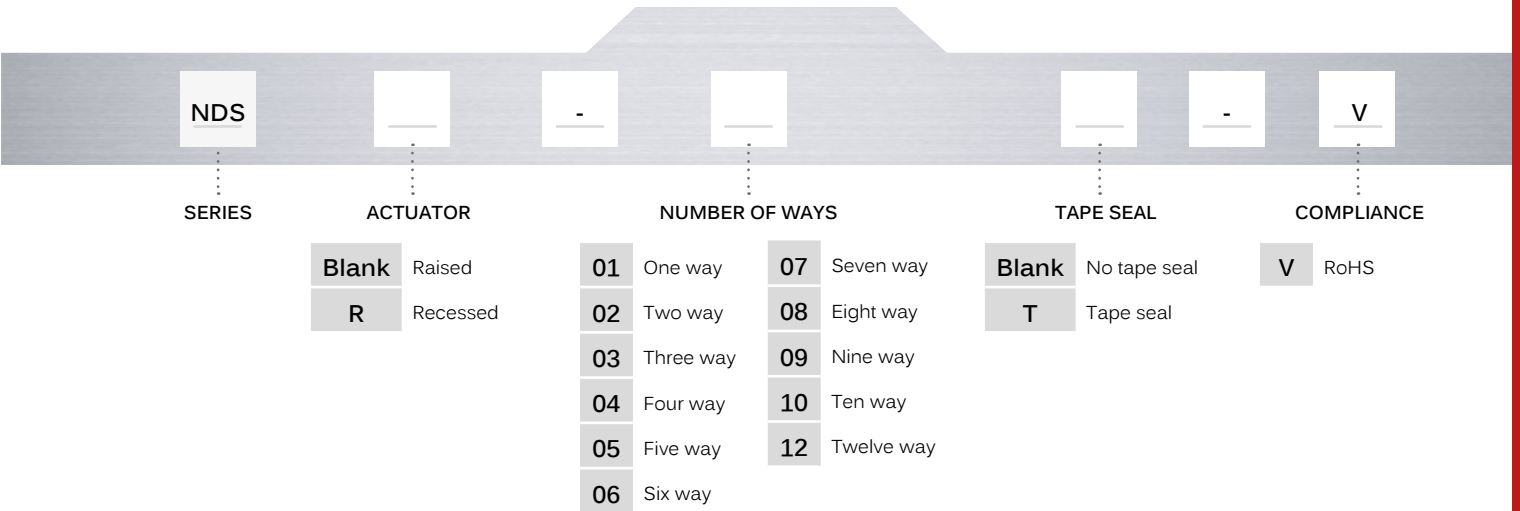

## 8 WAY - STANDARD PROFILE WITH RAISED ACTUATORS



Number of ways	Dimension A	Dimension B
1	3.90 (0.15)	NA
2	6.44 (0.25)	2.54 (0.1)
3	8.98 (0.35)	5.08 (0.2)
4	11.52 (0.45)	7.62 (0.3)
5	14.06 (0.55)	10.16 (0.4)
6	16.60 (0.65)	12.70 (0.5)
7	19.14 (0.75)	15.24 (0.6)
8	21.68 (0.85)	17.78 (0.7)
9	24.22 (0.95)	20.32 (0.8)
10	26.76 (1.05)	22.86 (0.9)
12	31.84 (1.25)	27.94 (1.1)

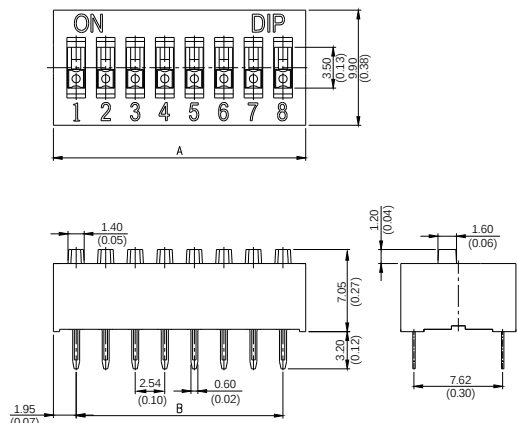

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIP Switches/SIP Switches](#) category:*

*Click to view products by [Apem](#) manufacturer:*

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [H7CZL8AC100240](#) [DRR60016](#) [DRS4016](#) [1825444-1](#) [200183](#) [206002](#) [206004LPST](#) [219-6LPSTRF](#) [25.350.0653.0](#) [SBS 5004 TG](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [192960010](#) [206005RAS](#) [206007](#) [2-1825058-8](#) [25.330.0653.1](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [LA2-002-DC24](#) [DBS2110](#) [DSR02T](#) [E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-9MSTP](#) [EPM02FV](#) [206010RAST](#) [NDS08V](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-1825058-3](#) [1825428-4](#) [219-10LPSTF](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [HARW0002](#) [EPG301BT06](#) [219-7LPSTRF](#) [1-1825058-6](#) [E3TSL23M5J03M](#) [Y5795](#) [7R0060](#)