SH6 SERIES SUBMINIATURE PUSHWHEEL SWITCHES









FEATURES

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- The smallest panel mounting pushwheel switches available.
- Snap action detent with audible click.
- Black housing & drum with white printing.
- Gangable front and rear mounting models.
- Gold wiping action contacts.
- P.C. board options include solderable lands, fingers or p.c. solder pins.

SH6, SH6G & SH6S SPECIFICATIONS

Panel mounting hole:

Height .590"(15mm) Width .236"(6mm)

Installed depth with p.c. board:

Short .925"(23.5mm) Long 1.213"(30.8mm)

Insertion from front yes Insertion from rear yes

CODES

Code positions marking

131 BCD100-9see truth tables137 BCD comp100-9see truth tables400 change-over10+,-+,-,etc..see truth tables

ELECTRICAL DATA

Operating voltage: 40 V max.

Contact load, static: 0.5 A max.

Contact load, dynamic: 100 mA max.

Contact resistance (type AK): less than 100 mOhm

TECHNICAL DATA

Operating temperature range: -20°C to 80°C
Electric life, min. switching cycles 100,000
Actuation force, approx (oz.): 14
Weight, approx. (grams): 1.5

Character height: .122"(3.1mm)

Audible click yes
Vibration DIN IEC 68, parts 2-6 yes
Shock DIN 40046, part 7 yes

MATERIALS

Body: PPO

PC board: FR 4 DIN 40802

IEC 249-2, Contact surface gold over nickel on copper

Sliding contact: Gold over nickel

on copper alloy

STANDARD COLORS

Housing, Drum, Printing

 $2 = black \quad 3 = white \qquad 2,2,3$

Other special features are available upon

request including:

Factory or customer set stops


Red digits
Decimal point

Special codes or printing

TRUTH TABLES


| ALL MODELS CODE 131 BCD | | | | | | | | |
|-------------------------------|---|---|---|---|---|--|--|--|
| | С | 1 | 2 | 4 | 8 | | | |
| 0 | • | | | | | | | |
| 1 | • | • | | | | | | |
| 1 2 3 4 5 | • | | • | | | | | |
| 3 | • | • | • | | | | | |
| 4 | • | | | • | | | | |
| | • | • | | • | | | | |
| 6 | • | | • | • | | | | |
| 7 | • | • | • | • | | | | |
| 8 | • | | | | • | | | |
| 9 | • | • | | | • | | | |


| SH6 & SH6G CODE 137 BCD COMP. | | | | | | | | |
|-------------------------------------|---|----------|---|---|---|--|--|--|
| | C | <u>1</u> | 2 | 4 | 8 | | | |
| 0 | • | • | • | • | • | | | |
| 1 | • | | • | • | • | | | |
| 2 3 | • | • | | • | • | | | |
| 3 | • | | | • | • | | | |
| 4 | • | • | • | | • | | | |
| 5 | • | | • | | • | | | |
| 6 | • | • | | | • | | | |
| 7 | • | | | | • | | | |
| 8 | • | • | • | • | | | | |
| 9 | • | | • | • | | | | |




MECHANICAL OUTLINES WITH PANEL CUT-OUTS


n = number of switches




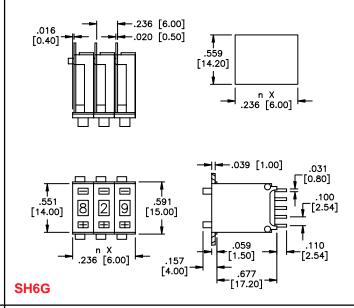

PIN CONNECTIONS








• The switching mode is shorting - i.e. - even during actuation, at least one output is connected to input C.

Т

SH6 SERIES SUBMINIATURE PUSHWHEEL SWITCHES

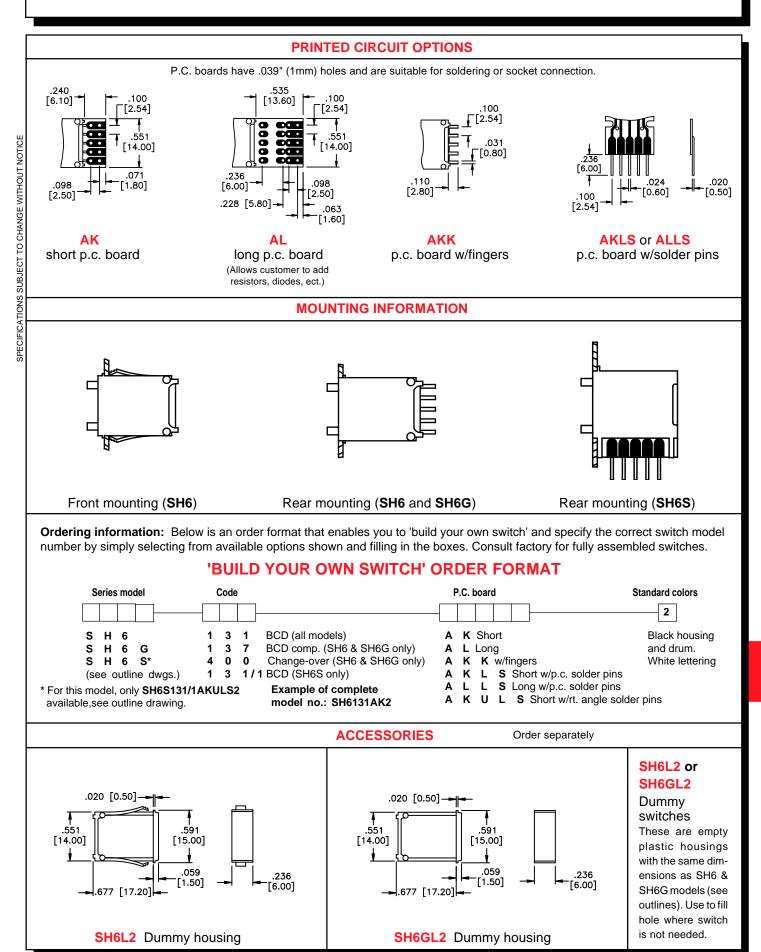

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thumbwheel Switches & Pushwheel Switches category:

Click to view products by Apem manufacturer:

Other Similar products are found below:

PICOD131ALULS2 A7SS-107-PM DGAN-031-B 1437603-2 DPS10131AL2 DPS10301AK DPS8111AK DPS8137AK2 1437603-7 A7M
1P B5LS B5LS 3-1437603-8 DGBN-036-B DPS10131AK DPS910A2 1-1437602-8 SH6G137AKLS2 1-1437603-1 SMCL2

SMCD137AK SP1.5 DPS8111AK2 TW01RED14 TW01BLK14 84212014 84212013 HTWF-1A12A21 301419100 302109002

302329N00 311100001 312100100 312300000 332300003 337100000 342300001 311100000 312100000 313100000 313110003

321400100 322300000 323100000 332100100 333100110 347100000 301119000 303109101 332710P00