

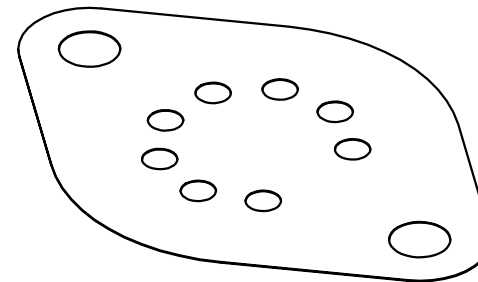
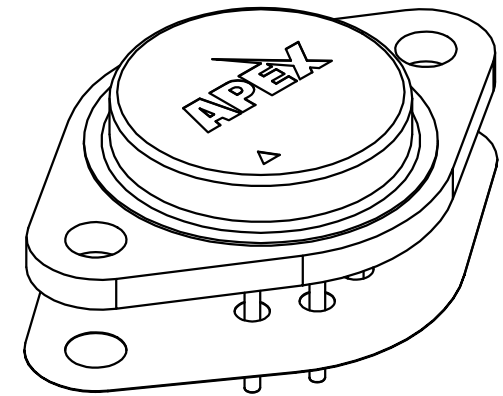


4

3

2

1

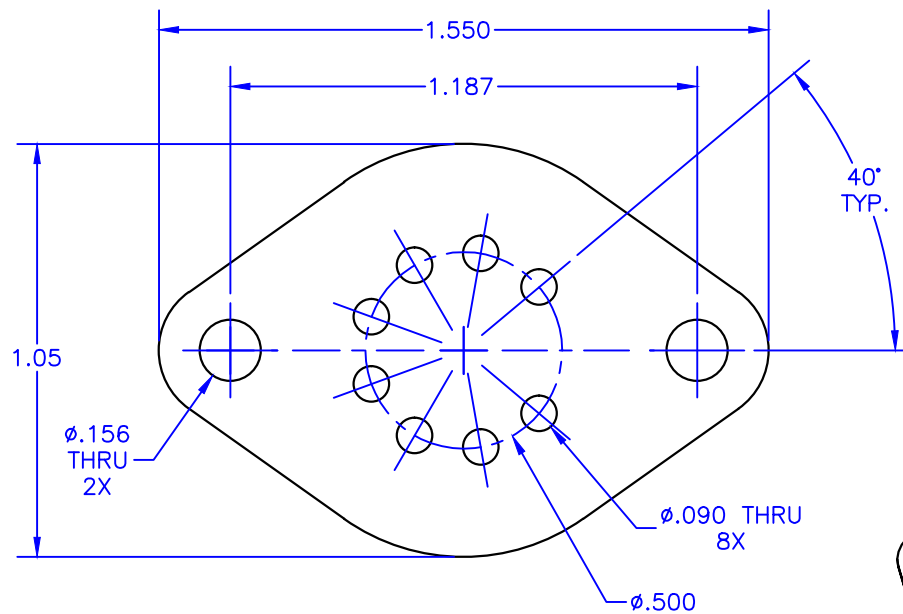

### NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Foil Material:  $.002$  thick 1145 aluminum
3. Interface Material:  $.0005$  thick phase-change thermal compound, both sides.  
Maximum shipping & storage temperature -  $40^{\circ}\text{C}$   
Reflow temperature -  $60^{\circ}\text{C}$   
Maximum recommended service temperature -  $200^{\circ}\text{C}$
4. Thermal impedance:  $.030^{\circ}\text{C/W-in}^2$  ( $.194^{\circ}\text{C/W-cm}^2$ ) @ 20psi
5. Used with TO3 packages (Apex designator: CE).

TOLERANCES - UNLESS OTHERWISE SPECIFIED
.XX = $\pm.01$ [.254]
.XXX = $\pm.005$ [.127]
ANG. = $\pm 5^{\circ}$



TITLE: THERMAL WASHER, T03		MODEL: TW03	
SUBJECT: MECHANICAL DRAWING			
ENGINEER: K.GOPP	DRAWN BY: J.FAY	DCA: 16270	SPL 1 OF 1
FILENAME: TW03	REV: J	DATE: 11JUL16	

4

3

2

1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Thermal Interface Products](#) category:*

*Click to view products by [Apex Microtechnology](#) manufacturer:*

Other Similar products are found below :

[7721-9PPS](#) [FGN80-2](#) [PFM-172-60](#) [A-40](#) [174-9-230P](#) [9601-7](#) [5300AC](#) [1.500G](#) [017177](#) [08133](#) [V6622C](#) [TVQF-1225-07S](#) [TP0001](#) [4860](#)  
[SC80-W2](#) [V6516C](#) [A17536-04](#) [A17713-06](#) [A17713-05](#) [A17775-03](#) [A17690-05](#) [A17653-02](#) [A17690-04](#) [A17775-05](#) [A17775-06](#) [A17690-08](#)  
[A17689-06](#) [A17653-06](#) [A17690-12](#) [A17653-03](#) [A17536-02](#) [A17752-04](#) [A17752-07](#) [A17634-12](#) [19-36565-0001-1](#) [A17752-10](#) [A17752-09](#)  
[22000-001A](#) [A17752-20](#) [A17752-12](#) [A17653-04](#) [A17634-10](#) [A17634-07](#) [A17156-02](#) [TA-1.75](#) [30195](#) [A17751-04](#) [V6516A](#) [SPT400-12-13.5-](#)  
[25](#) [189651F00000G](#) [A17883-07](#)