FEEL THE DIFFERENCE

THE PROVEN CHOICE. EVERY TIME.

HIGH-PRECISION TOOLS FOR ELECTRONICS DEVICE MANUFACTURING



www.weller-tools.com

FEEL THE DIFFERENCE

THE PROVEN CHOICE. EVERY TIME.

Manufactured with uncompromising Swiss quality, and **created especially for electronics applications**, Weller Erem[®] tools are built to last. The signature high-performance cutters set the industry standard by providing over 1 million consistent precise and accurate movements. With state-of-the-art advanced features like Magic Spring[™], High-Precision Screw Joint, and Maximum Opening Stop Technology, Weller Erem Precision Tools provide the longest durability, highest precision and best quality on the planet.



Weller Erem products are made and manufactured with uncompromising Swiss quality, created to be strong, durable, sharp and precise






Weller Erem is a leader in the development and production of high-precision, top-quality precision tools (side and tip cutters, pliers and tweezers). Founded in Geneva, Switzerland in 1963, Weller Erem precision tools are the result of ongoing product development and innovation to meet customer demands and the requirements of modern manufacturing techniques.

Custom-made

Have a problem? We have the solution with our ability to quickly manufacture the custom tool you need.

With an estimated 2-week turnaround time, Weller Erem will customize any of our precision tools to meet your applications needs.



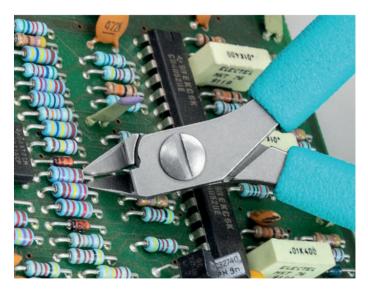

Cutters for electronics applications

A simple method to remove SMD ICs is to cut each of the individual leads to remove the device and then reflow the joint with a soldering iron and remove the component lead from the board.

The solder left on the board can then be removed with a desoldering tool or desolder braid and a new component fitted. The 670EP and 670EPF have fine pointed tapered and relieved heads that are able to fit between individual leads and cut them without causing damage to the printed circuit.

THE PERFECT CUT

Strong, sharp and precise - every time

Cutter Electronics Applications: Remove Fine Pitch SMD ICs | Light engineering and Dental Applications



Cut shape

Three blade options, including Weller Erem's exclusive Super Full Flush cut.



Semi-flush

- · Leaves a pyramidal tip at the end of the wire
- For standard jobs where the final shape does not play a significant role
- For both soft copper wires and very hard wires, such as stainless steel



- Leaves a much smaller tip at the end of the wire when compared to a Semi-Flush cut – without reducing the cutting ability
- The cutting edges are finer than on semi-flush cutters
- Effort exerted when cutting is less and the load on the component is reduced
- Flush wire ends reduce the effort needed to fit components on printed-circuit boards



Super Full Flush

- Provides absolutely flush wire ends, only offered from Weller Erem
- No rework is needed
- Cuts are absolutely precision-ground and sharpened
- Effort exerted when cutting is minimal, as is the load on the component caused by the cut
- Soldering tags in soldering-bath procedures are prevented







Competitor

THE PERFECT COMBINATION

Precision, design, symmetry and balance

Tweezer Electronics Applications: Microelectronics, Jewelrymaking and Watchmaking Applications



BUILT TO LAST

Longest lasting durability on the planet

Pliers Electronics Applications: For Miniature and standard electronics | Forming, Bending, Laying and Feeding in Wires



	C	UTTE	ERS	Key		Dimer	nsions	i	o- nics		de	ope	ize
	Model	Cut	Description	Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electronics	SMD		Microscope	Head Size
TOP SE 776E	ELLER		Tip cutter – pointed relieved head This is the narrowest head shape The underside is relieved and facilitates	General - for all cutting appliations with	0.354	0.354	0.236	0.630	\checkmark				SMALL
	Viele-	Full Flush	optimum access even to extremely hard-to-reach areas.	easy access	9	9	6	16	¥	, v		, v	
612N	Water		Side cutter – oval head This is the most widely used head shape Fits for all cutting applications where easy arcsec is then	General - for all cutting appliations with	0.394	0.354	0.236	0.669	\checkmark	\checkmark		\checkmark	SMALL
	Ren Story	Semi- Flush	access is given	easy access	10	9	6	17					
512N	West	Semi- Flush	Side cutter - oval head This is the most widely used head shape Fits for all cutting applications where easy access is given It is robust and offers the highest cutting capacity	General - for all cutting appliations with easy access	0.472	0.433	0.236	0.748	\checkmark	\checkmark		\checkmark	MED
2412E			Side cutter – oval head This is the most widely used head shape Fits for all cutting applications where easy access is given It is robust and offers the highest cutting	General - for all cutting appliations with	0.472	0.433	0.236	0.748					MED
	Weller Streem Friend	Semi- Flush	capacity • The ergonomic handles and the special materials ensure a soft feel, operating comfort and safety	easy access	12	11	6	19	v	*		v	
2482E	1		Side Cutters and Tip Cutters Tip cutter - angled narrow head The angled head allows precise cuts at different working angles Suitable for working on printed-circuit	General - for all cutting appliation with	0.236	0.433	0.236	1.024		(MED
24022	Weller	Flush	boards, component connections, can be used in both 90° and 180° applications • Ergonomic handle and special materials ensure a soft feel, operating comfort and safety	limited access, SMD	6	11	6	26	~	V		V	WED
2403E			 Tip cutter - angled wide robust head Oval shape. 30° Similar to 503E, but with ergonomic handles The angled head provides for precise cuts at 	Electronic, Microelectronic,	0.354	0.433	0.236	0.787	(_		_	MED
2403E	Weres The em	Flush	different working angles • The ergonomic handles and special materials ensure a soft feel, operating comfort and safety	Wires, PCB boards	9	11	6	20	~	V		~	MED
599T			Side cutter - oval head - hard metal blades Fits for all cutting applications where easy access is given	Carbide, Wire, Boards, Fine	0.748	0.433	0.236	0.748					MED
	Weller Crem Storess Storess	Semi- Flush	This is the most widely used head shape It is robust and size for size offers the highest cutting capacity	& Standard electronic	19	11	6	19	~	~			
503ET	*		Tip cutter - angled wide head Tungsten-carbide cutters	Hard and tough wires e.g. piano	4.331	0.433	0.236	0.795	-	1	1		MED
JUSE I	the second	Semi- Flush	The angled head provides for precise cuts at different working angles	wire, nickle and diode leads	9.6	11	6	20.2	\checkmark	V	V		
1500BSF	THE REAL PROPERTY.		 Pneumatic side cutter and tip cutter. Requires 4 - 6 bar oil-free clean compressed air Pneumatic cutter Handy, light and precise Extremely versatile thanks to a selection of different cutting heads Easily interchangeable cutting heads Suitable for cutting conventional components, soft metals or small plastic parts Pneumatic-cutter housing 	Hard and tough wires e.g. piano wire, nickle and diode leads					\checkmark	\checkmark			

	C	UTTE	RS			Dime	nsions		cs.		0	be	2G
	Model	Cut	Description	Key Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electroni	SMD	Carbido	Microsco	Head Size
T622N			 Side cutter – oval head Most widely used head shape Fits for all cutting applications where easy 	Micro & Fine	0.394	0.354	0.236	0.669					MICRO
	en e	Full Flush	access is given • It is robust and size for size offers the highest cutting capacity	electronic	10	9	6	17	~				
5005454	11		 Distance cutter, variable cutting length from 1.2 mm to 6 mm/ 047 to .236 lnch Special tool steel, ESD-safe, Variable cutting 	Micro electronics, PCB, SMD, for cutting wires to	4.921	0.433	0.236	1.142					MED
530E15A	1	Full Flush	length (= V) • Protective stop screw	the right length and for fixing components	125	11	6	29	*	×		•	
			Side cutter with compound action	Guide Wires, Stents, Catheters, Single/ Multiple	0.394	0.630	0.295	0.630					MAXI
E147A	S.	Semi- Flush	For cutting hard wires with minimal effort	Fillers, Lateral/ Internal Cuts, Electronic appllications	10	16	7.5	16					
886E	Weller		 Side cutter - tapered head Jaws have straight edges and taper to a point. Head shape allows access to difficult- 	Hard and tough components		0.531	0.284	0.827					MAXI
	trem wiss e	Full Flush	to-reach areas in comparison to the same size oval head cutter			13.5	7.2	21	· ·	×			
2422E			Side cutter - oval head Offers the highest cutting capacity Most widely used head shape Fits all cutting applications where easy access is given	Micro electronics	0.748	0.433	0.236	0.748					MED
	Nette Sem	Full Flush	The ergonomic handles and the special materials ensure a soft feel, operating comfort and safety		12	11	6	19			Microsone Microsone		
599FO			 Fibre optic tools High precision for optical fibres - special tool steel 	Stainless Steel Coil Wires, Kevlar®, Vectran™	0.472	0.433	0.24	0.748					MED
	Were of the gg	Semi- Flush	Side cutter, suitable for cutting Kevlar [®] silks Avoid any other application than cutting Kevlar silks to avoid damaging the tool	Braided Wires, Fiber Optics	12	11	6	19	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
			Side cutter flush cut, for PCB separation only	Micro &									
884EPCM	were the second		Side cutter, suitable for cutting printed-circuit boards	Standard electronics									MAXI
505C	Sec		IC and SMD tools for inserting, extracting, straightening and cutting IC and SMD components	Micro & Standard	4.724	0.433							MEDIUM
	No. Contraction of the second s		Inserting and extracting 14-16 pins Non-reflecting surface ESD-safe	electronics, SMD rework	120	11			V				MEI

Đ

The items listed are the most popular Weller Erem products for the electronic's industry.



(Dimer	isions		cs			be	ze		
Model	CUTTE	Description	Key Applications	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	Micro- Electronics	SMD	Carbide	Microscope	Head Size
TOP SELLER		 Side cutter - oval head This is the most widely used head shape Fits for all cutting applications where easy access is given 	General - for all cutting appliation with easy	0.472	0.433	0.236	0.748		\checkmark		\checkmark	MEDIUM
522N	Full Flush	It is robust and offers the highest cutting capacity	access	12	11	6	19	, v	v		v	M
539EREC			Micro & Standard electronics, PCB	0.472	0.433	0.236	0.728					MEDIUM
The second	Full Flush			12	11	6	18.5	*	*			ME
2622NB		 Side cutter – pointed relieved head This is the narrowest head shape The underside is relieved and facilitates optimum access even to extremely 	Micro & Standard electronics	0.236	0.354	0.236	0.630		\checkmark			SMALL
Spen Spen	Full Flush	hard-to-reach areas		6	9	6	16					55

	ΡΙ	IERS	Key			Dimer	nsions			S			be	9
MODEL		DESCRIPTION	Applica- tions	A (in / mm)	B (in / mm)	C (in / mm)	D (in / mm)	E (in / mm)	G (in / mm)	Micro- Electroni		A A A A A A A A A A A A A A	Microsco	Head Size
2443P		Round nose pliers with very precise, smooth jaws Pliers for miniature and standard electronics Optimized ergonomically shaped handles for increased comfort	Fine and Standard electronic,	5.748	0.433	0.236	1.594	0.031	0.063					MEDIUM
2443P	No.	Non-reflecting surface, ESD-safe Suitable for bending wires	bending wire	146	11	6	40.5	0.8	1.6	V	V			WE
	Λ	Flat nose pliers Flat nose pliers Pliers for miniature and standard electronics Optimized ergonomically shaped handles for increased comfort	Miniature	1.307	0.433	0.236	1.594	0.134	0.047					M
2442P	E De	Non-reflecting surface, ESD-safe Suitable for gripping flat workpieces With smooth jaws and precision- machined edges	and standard electronics	33.2	11	6	40.5	3.4	1.2	\checkmark			= Head w = head th = Width o = Total he of both	MEDIUM
			Forming and handling components while	0.91	0.43	0.24		0.2	0.12	A			= Jaw len	
531E	Helin	Flat nose pliers with replaceable nylon jaws Non-reflecting surface, ESD-safe, high grade tool steel Nylon jaws prevent nicking and scratching	preventing scratching and nicking for miniature and standard electronics	23	11	6		5	3	G T G T E	ci v	E	= head thi = Width of = Total he of both	tips ight
552S	2.9	 Wire Stripper: Suitable for all types of insulation, Teflon[®], Tefzel and optical fibres Unlimited stripping length thanks to side stripping Suitable for simple and precise stripping of optical fibres Non-reflecting surface 	All Types of Insulation, Teflon, Tefzel					0.433	0.354	G	F	≥ <u>○</u> ○ ○ 5 + → H		
Not the second s		Robust, high-precision tools for use in electronics and aeronautical engineering The required diameter is set by means of screws Screwdriver and key are included Interchangeable blades ESD-safe Unique precision for damage-free stripping of fine wires	and optical fibers.					11	9		E = Total he	ngth of tips of interchar eight of bot	h tips	de
2411PD	1	Needle nose pliers with very precise and rounded jaws Non-reflecting surface, ESD-safe	For miniature and standard electronics	1.307	0.433	0.236	5.291	0.039	0.047	\checkmark	\checkmark			MEDIUM
	Non-reflecting surface,	Inside serrated jaws for better grip	application	33.2	11	6	150	1	1.2	7	,		Ť	Σ

	IW	EEZ	ERS	Кеу	Length (in/	Weight	icro- tronics			rious tronic		Head Size
	Model	Shape	Description	Applications	(mm)	(oz/g)	Blect	s	Micro	Vai Elec	Ma	Hea
3SA		Ohaiaht	Suitable for delicate standard applications and precision work on	General purpose use in	4.724	0.49					Stainless	Fin
35A		Straight	 small components or wires Special stainless steel, non-magnetic, non-rusting, acid-proof, heat-resistant 	$ \begin{array}{ c c c } \hline \begin{tabular}{ c c } \hline \begi$		Steel	Poir					
102ACAX	10245	Angled	 SMD tweezers, angled 45°, with pointed tips for vertical application, and 		0.010	0.49		((Stainless	Fin
02HOPH		Aligiou	reverse clamping action for easy holding	(chip, MELFs, mini MELFs)	0.25	14	~	V			Steel	Poi
2ASASL			 Precision tweezers with flat rounded tips for gripping, small components. Tip width 2 mm/.078 Inch 	applications and assembly jobs on printed-circuit	4.843	0.564					Stainless	
			 Special stainless steel, nonmagnetic, non-rusting, acid-proof, heat-resistant 	SMD multiplication, and precisions (chip, MELFs, mini MELFs) 0.25 14 St Ilat rounded or easy holding Standard gripping applications and assembly lobs on printed-circuit boards, e.g. in the goldsmith and jeweiry industries 4.843 0.564 St 2res with long, goldsmith and jeweiry industries Standard gripping applications and assembly boards, e.g. in the goldsmith and jeweiry industries 4.724 0.582 St yub-D Sutable for extracting contacts from the rear of a polications and molten soldering tim. 4.724 0.533 St yub-D Suitable for extracting contacts from the rear of a polications store the rear of a soldering tim. 4.724 0.53 St yub-D Suitable for extracting contacts from the rear of a soldering tim. 5.906 1.05 St yuffer soldering tim. Microscope, applications soldering tim. 5.906 1.05 St yuffer soldering tim. Microscope, and contacts for wires soldering tim. 5.906 1.05	Steel							
			 Ergonomic precision tweezers with long, straight and pointed tips, e.g. for 	applications and assembly	4.724	0.582	(((Stainless	
E3CSA 024C 258SA 141SAP			assembly jobs on printed-circuit boards • Thermally insulated, soft foam handles, ESD-safe	boards, e.g. in the goldsmith and jewelry	120	17	\checkmark	\checkmark	\vee	\checkmark	Steel	
			Extraction tweezers for Sub-D	Suitable for extracting	4.724	0.53		(Stainless Steel Steel		
024C	tore Weller		connectors.		120	15	\checkmark	\checkmark	\checkmark	\checkmark		
			Precision tweezers with pointed synthetic tips (PPS) and serrated finger grips for secure handling		4.724	0.53				\checkmark	Stainless	
258SA					120	15					Steel	
141SAP		I	 Wafer tweezers with polyester tips for protecting Si, GaAs or Ti wafers against 	All Wafer applications	5.906	1.05					Stainless	
			damage. For $4^{\circ} - 6^{\circ}$ wafers.		150	30					Steel	
OOSA		Straight	 Precision tweezers with pointed tips. Very robust. Suitable for standard applications, e.g. for assembly in 	microelectronics, medical and laboratories	4.724	0.71						Fin
		orangin	 electronics Special stainless steel, non-magnetic, non-rusting, acid-proof, heat-resistant 	precision work on small	120	30		V			Steel	Poi
		Narrow	 Cutting tweezers with narrow oblique head Hardened cutting edges for long 		4.528	0.74					Carbon	0.2
I5AGW		Oblique Head	 Suitable for cutting fine, soft wires and small components 	mm/.010 in. and small	115	21	30 Steel		narro to a			
	31-51		Narrow Oblique Head • Cutting tweezers with narrow oblique head • Precision tweezers, curved 30°, • Precision tweezers, curved 30°, • Relieved shape at front of handle • Precision tweezers, curved 30°, • Relieved shape at front of handle • Precision tweezers, curved 30°, • Relieved shape at front of handle • Precision tweezers with pulnet ups. • Cutting tweezers with partow oblique head • Hardened cutting edges for long • Suitable for cutting fine, soft wires and • Precision tweezers, curved 30°, • Relieved shape at front of handle • Provide excellent visibility of the • Designed for cutting in • Suitable for cutting fine, soft wires and • Precision tweezers, curved 30°, • Relieved shape at front of handle • Very pointed tips • Applications in biology, medicine, laboratory technology and microelec- tronics 4.528 0.74									
51SA			 Relieved shape at front of handle 	technology and microelec-	115	12	\checkmark	\checkmark	\checkmark	\checkmark		
	82		Precision tweezers, curved, relieved, with pointed tips		4.724	0.53		-		-		<u> </u>
51SA 7SA		Curved	 Bent chang facilitates access to 	medicine, laboratory technology and	120	15		\bigvee		\checkmark		Ver Fin
			 Precision tweezers with ceramic tips and serrated finger grips for 	General numero uno in	5.118	0.84						
249CER	(e. 0	Straight	secure handling. Volume resistance 16 Ω/cm. Heat-resistant up to 900°C (1500°F). Resistant to acids and molten soldering tin. Water-repellent	microelectronics,	130	24	\checkmark	\checkmark	\checkmark	\checkmark		Ve Fin
			 Black cutting tweezers with narrow oblique head. For soft wires up to dia. 	Cutting fine soft wires and	4.528	0.741			1		Carbon	
15AGS		Cutting			115	21	\checkmark	\checkmark				
9W30	ing way -	Stripping	• Stripping tweezers with synthetic fibre handle. For wires of dia. 0.25 – 0.3 mm/.010 – .011 Inch (AWG	Stripping fine wires with	4.724	0.99						
			30 − 28). • For standard and Teflon [®] insulation	PVC or Teflon [®] insulation	120	28				Y	2(66)	

The items listed are the most popular Weller Erem products for the electronic's industry.



The Original.

Weller guarantees you the latest and best technology in the soldering market

Industrial Soldering Equipment

Professionalism makes no compromises.

Weller soldering technology that is packed with precision, innovation and quality.

Filtration

Take a deep breath. Providing clean air for your workplace.

Weller filtration systems for continuous use in industrial working environments filters fumes, adhesives and particles and recirculates back clean air while keeping noise pollution to a minimum.

Precision Tools

Feel the difference. The proven choice. Every time.

Manufactured with uncompromising Swiss quality, Precision Tools are designed to be strong, durable, sharp and have the highest precision available. Weller Erem tools are built to last.

GERMANY

Weller Tools GmbH Carl-Benz-Straße 2 74354 Besigheim

Tel: +49 (0) 7143 580-0 Fax: +49 (0) 7143 580-108

Weller®

CHINA

Apex Tool Group Room 302A, NO 177 Bibo Roac Shanghai 201203

Tel: +86 (21) 60880288 Fax: +86 (21) 60880289 USA

Weller

Apex Tool Group, LLC 670 Industrial Drive Lexington, SC 29072

Tel: +1 (800) 688-8949 Fax: +1 (800) 234-0472

©2020, Apex Tool Group LLC

www.weller-tools.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Apex Tool Group manufacturer:

Other Similar products are found below :

0051303199005131249900513140990051314299005131439900513144990051314899005131509900513172990051512199N005151229900515124990051514699N0051515399005161209900516443990052241999005270429900529170990052918099005 32566 9900534026990053641099005364219900540034990054006099005432119900544402700054444399005446019900544605990054460699N0054461099N00544612990054462699N0054465199N0054465299N00544653990054470199005447039900544704990054470599005447079900544713990054471499005447369900544850990054485199