


SERIES

**1331R
1331**



Shielded Surface Mount Inductors

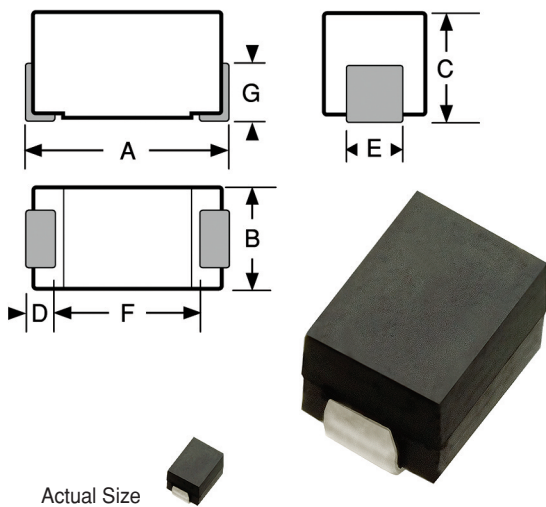

Physical Parameters

| | Inches | Millimeters |
|---|-------------------|------------------|
| A | 0.300 to 0.325 | 7.62 to 8.26 |
| B | 0.105 to 0.125 | 2.67 to 3.18 |
| C | 0.125 to 0.145 | 3.18 to 3.68 |
| D | 0.020 Min. | 0.508 Min. |
| E | 0.040 to 0.060 | 1.02 to 1.52 |
| F | 0.190 (Ref. only) | 4.83 (Ref. only) |
| G | 0.070 (Ref. only) | 1.78 (Ref. only) |

Dimensions "A" and "C" are over terminations

Weight Max (Grams) 0.30

Operating Temperature Range -55°C to +105°C

Current Rating at 90°C Ambient 15°C Rise

Maximum Power Dissipation at 90°C 0.585 W

Incremental Current Current level which causes a maximum of 5% decrease in inductance.

Coupling 3% Max.

****Note** Self Resonant Frequency (SRF) values for -101K to -331K are calculated and for reference only.

Marking Delevan; dash number followed by an S; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1331R-683K
DELEVAN
683 S
R 0719B

Packaging Tape & reel (16mm): 7" reel, 500 pieces max.; 13" reel, 2200 pieces max.

Made In the U.S.A.

| | | | | | | |
|--------------|----------------------|----------------------|-------------------|--------------------------------|-----------------------------|--------------------------|
| DASH NUMBER* | INDUCTANCE (µH) ±10% | TEST FREQUENCY (MHz) | SRF MINIMUM (MHz) | DC RESISTANCE MAXIMUM (OHMS)** | CURRENT RATING MAXIMUM (mA) | INCREMENTAL CURRENT (mA) |
|--------------|----------------------|----------------------|-------------------|--------------------------------|-----------------------------|--------------------------|

| SERIES 1331 IRON CORE - IRON SLEEVE | | | | | | | |
|---|-------|----|------|---------|------|-----|-----|
| -101K | 0.10 | 45 | 25.0 | 490.0** | 0.10 | 670 | 670 |
| -121K | 0.12 | 45 | 25.0 | 430.0** | 0.11 | 635 | 635 |
| -151K | 0.15 | 45 | 25.0 | 415.0** | 0.12 | 610 | 610 |
| -181K | 0.18 | 45 | 25.0 | 375.0** | 0.13 | 585 | 585 |
| -221K | 0.22 | 45 | 25.0 | 330.0** | 0.15 | 545 | 545 |
| -271K | 0.27 | 45 | 25.0 | 300.0** | 0.16 | 530 | 530 |
| -331K | 0.33 | 44 | 25.0 | 260.0** | 0.18 | 495 | 495 |
| -391K | 0.39 | 42 | 25.0 | 230.0 | 0.19 | 485 | 485 |
| -471K | 0.47 | 41 | 25.0 | 220.0 | 0.21 | 460 | 460 |
| -561K | 0.56 | 41 | 25.0 | 210.0 | 0.23 | 440 | 440 |
| -681K | 0.68 | 39 | 25.0 | 180.0 | 0.24 | 430 | 430 |
| -821K | 0.82 | 38 | 25.0 | 165.0 | 0.27 | 405 | 405 |
| -102K | 1.00 | 37 | 25.0 | 150.0 | 0.30 | 385 | 385 |
| -122K | 1.20 | 40 | 7.9 | 130.0 | 0.73 | 247 | 247 |
| -152K | 1.50 | 41 | 7.9 | 115.0 | 0.86 | 228 | 228 |
| -182K | 1.80 | 43 | 7.9 | 105.0 | 0.95 | 217 | 217 |
| -222K | 2.20 | 45 | 7.9 | 95.0 | 1.10 | 202 | 202 |
| -272K | 2.70 | 48 | 7.9 | 90.0 | 1.20 | 193 | 193 |
| -332K | 3.30 | 49 | 7.9 | 80.0 | 1.30 | 185 | 185 |
| -392K | 3.90 | 50 | 7.9 | 75.0 | 1.50 | 173 | 173 |
| -472K | 4.70 | 50 | 7.9 | 70.0 | 2.40 | 136 | 136 |
| -562K | 5.60 | 50 | 7.9 | 60.0 | 2.90 | 124 | 124 |
| -682K | 6.80 | 50 | 7.9 | 55.0 | 3.20 | 118 | 118 |
| -822K | 8.20 | 50 | 7.9 | 53.0 | 3.60 | 111 | 111 |
| -103K | 10.0 | 50 | 7.9 | 50.0 | 4.00 | 106 | 106 |
| SERIES 1331 IRON CORE - FERRITE SLEEVE | | | | | | | |
| -123K | 12.0 | 36 | 2.5 | 35.0 | 3.00 | 122 | 122 |
| -153K | 15.0 | 38 | 2.5 | 30.0 | 3.40 | 115 | 115 |
| -183K | 18.0 | 40 | 2.5 | 26.0 | 3.80 | 108 | 108 |
| -223K | 22.0 | 40 | 2.5 | 24.0 | 4.90 | 96 | 96 |
| -273K | 27.0 | 40 | 2.5 | 21.0 | 5.80 | 88 | 88 |
| -333K | 33.0 | 41 | 2.5 | 20.0 | 6.50 | 83 | 83 |
| -393K | 39.0 | 42 | 2.5 | 19.0 | 7.90 | 75 | 75 |
| -473K | 47.0 | 44 | 2.5 | 16.0 | 9.30 | 69 | 69 |
| -563K | 56.0 | 44 | 2.5 | 15.0 | 11.0 | 64 | 64 |
| -683K | 68.0 | 45 | 2.5 | 13.0 | 12.0 | 61 | 61 |
| -823K | 82.0 | 45 | 2.5 | 11.0 | 13.0 | 59 | 59 |
| -104K | 100.0 | 40 | 2.5 | 10.5 | 16.8 | 51 | 51 |
| SERIES 1331 FERRITE CORE - FERRITE SLEEVE | | | | | | | |
| -124K | 120.0 | 31 | 0.79 | 13.0 | 5.80 | 88 | 27 |
| -154K | 150.0 | 33 | 0.79 | 12.0 | 7.90 | 75 | 24 |
| -184K | 180.0 | 33 | 0.79 | 11.0 | 9.40 | 69 | 22 |
| -224K | 220.0 | 35 | 0.79 | 10.0 | 11.0 | 64 | 20 |
| -274K | 270.0 | 35 | 0.79 | 9.0 | 12.0 | 61 | 18 |
| -334K | 330.0 | 35 | 0.79 | 8.0 | 16.0 | 53 | 16 |
| -394K | 390.0 | 35 | 0.79 | 7.8 | 21.0 | 46 | 14 |
| -474K | 470.0 | 35 | 0.79 | 7.5 | 24.0 | 43 | 13 |
| -564K | 560.0 | 35 | 0.79 | 7.0 | 28.0 | 40 | 12 |

Optional Tolerances: J = 5% H = 3% G = 2% F = 1%
*Complete part # must include series # PLUS the dash #

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [API Delevan](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)