


**SERIES**

**4554R & 4564R  
4554 & 4564**



**Radial Lead Inductors**

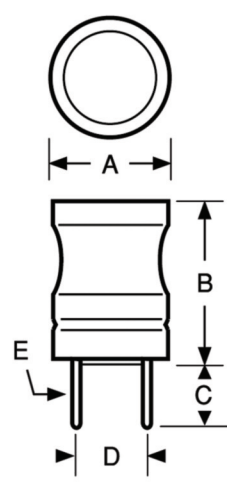

Actual Size (Max.)

**Physical Parameters**

**Series 4554**

	Inches	Millimeters
A	0.34 Max.	8.64 Max.
B	0.433 Max.	11 Max.
C	0.200 Nom.	5.0 Nom.
D	0.200 Nom.	5.0 Nom.
E	0.024 Nom.	0.61 Nom.

**Series 4564**

	Inches	Millimeters
A	0.315 Max.	8.0 Max.
B	0.440 Max.	11.2 Max.
C	0.200 Nom.	5.0 Nom.
D	0.200 Nom.	5.0 Nom.
E	0.028 Nom.	0.71 Nom.

**Operating Temperature Range**

Series 4554 -40°C to +85°C  
Series 4564 -20°C to +80°C

**Storage Temperature Range**

Series 4554 -40°C to +85°C  
Series 4564 -40°C to +80°C

**The Rated DC Current** The amperage where the inductance value decreases 10%.

**\*\*Note: Series 4554 Inductance Tolerance** Available in J = 5% in values ≥ 100µH only

**Packaging** Bulk

Series 4564 Optional Tolerances: J = 5%  
\*Complete part # must include series # PLUS the dash #

DASH NUMBER*	INDUCTANCE**	TOLERANCE (%)	TEST FREQUENCY (MHZ)	SRF MINIMUM (MHZ)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (A)
<b>SERIES 4554 FERRITE CORE</b>						
-1R0M	1.0 µH	±20%	20	7.96	150.0	10.0
-1R5M	1.5 µH	±20%	20	7.96	130.0	8.5
-2R2M	2.2 µH	±20%	20	7.96	100.0	6.5
-3R3M	3.3 µH	±20%	20	7.96	79.0	5.5
-4R7M	4.7 µH	±20%	20	7.96	51.0	4.3
-6R8M	6.8 µH	±20%	20	7.96	29.0	3.7
-100K	10 µH	±10%	50	2.52	14.0	3.0
-120K	12 µH	±10%	50	2.52	13.0	2.6
-150K	15 µH	±10%	50	2.52	12.0	2.2
-180K	18 µH	±10%	40	2.52	11.0	2.0
-220K	22 µH	±10%	40	2.52	9.2	1.7
-270K	27 µH	±10%	40	2.52	8.5	1.6
-330K	33 µH	±10%	30	2.52	7.8	1.5
-390K	39 µH	±10%	30	2.52	6.9	1.4
-470K	47 µH	±10%	30	2.52	6.5	1.3
-560K	56 µH	±10%	30	2.52	5.4	1.2
-680K	68 µH	±10%	30	2.52	4.9	1.2
-820K	82 µH	±10%	30	2.52	4.1	1.1
-101K	100 µH**	±10%	20	0.796	3.7	0.91
-121K	120 µH**	±10%	20	0.796	3.4	0.84
-151K	150 µH**	±10%	20	0.796	3.2	0.75
-181K	180 µH**	±10%	20	0.796	2.8	0.69
-221K	220 µH**	±10%	20	0.796	2.7	0.64
-271K	270 µH**	±10%	20	0.796	2.4	0.57
-331K	330 µH**	±10%	20	0.796	2.3	0.54
-391K	390 µH**	±10%	20	0.796	2.1	0.48
-471K	470 µH**	±10%	20	0.796	1.9	0.46
-561K	560 µH**	±10%	20	0.796	1.8	0.41
-681K	680 µH**	±10%	20	0.796	1.6	0.38
-821K	820 µH**	±10%	20	0.796	1.5	0.35
-102K	1000 µH**	±10%	50	0.252	1.3	0.29
<b>SERIES 4564 FERRITE CORE</b>						
-101K	0.10 mH	±10%	80	0.796	5.3	2.0
-121K	0.12 mH	±10%	80	0.796	4.5	2.0
-151K	0.15 mH	±10%	80	0.796	3.8	2.0
-181K	0.18 mH	±10%	80	0.796	3.3	2.0
-221K	0.22 mH	±10%	80	0.796	2.9	2.0
-271K	0.27 mH	±10%	80	0.796	2.6	2.0
-331K	0.33 mH	±10%	80	0.796	2.3	2.0
-391K	0.39 mH	±10%	80	0.796	2.1	2.0
-471K	0.47 mH	±10%	80	0.796	1.9	2.0
-561K	0.56 mH	±10%	80	0.796	1.7	2.0
-681K	0.68 mH	±10%	80	0.796	1.6	2.0
-821K	0.82 mH	±10%	80	0.796	1.4	2.0
-102K	1.00 mH	±10%	90	0.252	1.3	0.15
-122K	1.20 mH	±10%	90	0.252	1.2	0.15
-152K	1.50 mH	±10%	90	0.252	1.1	0.15
-182K	1.80 mH	±10%	90	0.252	1.0	0.10
-222K	2.20 mH	±10%	90	0.252	0.9	0.10
-272K	2.70 mH	±10%	90	0.252	0.8	0.10
-332K	3.30 mH	±10%	90	0.252	0.7	0.10
-392K	3.90 mH	±10%	90	0.252	0.7	0.05
-472K	4.70 mH	±10%	90	0.252	0.6	0.05
-562K	5.60 mH	±10%	90	0.252	0.6	0.05
-682K	6.80 mH	±10%	90	0.252	0.5	0.05
-822K	8.20 mH	±10%	90	0.252	0.5	0.05
-103K	10.0 mH	±10%	100	0.0796	0.4	0.04
-123K	12.0 mH	±10%	100	0.0796	0.4	0.04
-153K	15.0 mH	±10%	100	0.0796	0.4	0.04
-183K	18.0 mH	±10%	100	0.0796	0.3	0.03
-223K	22.0 mH	±10%	100	0.0796	0.3	0.03
-273K	27.0 mH	±10%	100	0.0796	0.2	0.03
-333K	33.0 mH	±10%	100	0.0796	0.2	0.03

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [API Delevan](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)  
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)  
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)  
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)