




High Current Power Chokes

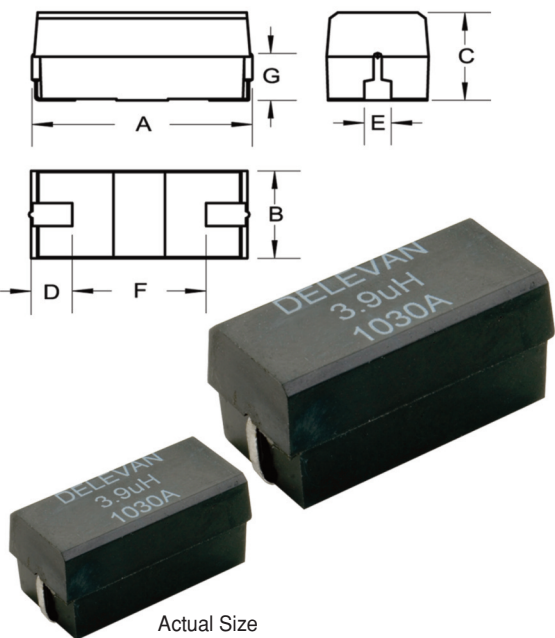

Physical Parameters

	Inches	Millimeters
A	1.020 to 1.080	25.91 to 27.44
B	0.480 to 0.510	12.20 to 12.96
C	0.520 Maximum	13.21 Maximum
D	0.240 Minimum	6.10 Minimum
E	0.120 to 0.160	3.05 to 4.07
F	0.500 (Ref. Only)	12.70 (Ref. Only)
G	0.250 (Ref. Only)	6.35 (Ref. Only)

**Dimensions** "A" and "C" and "G" are over the terminals.  
**Operating Temperature Range** -55°C to +130°C  
**Current Rating at 85°C Ambient** 45°C Temperature Rise  
**Maximum Power Dissipation** at +85°C: 1.166 Watts Maximum  
**Inductance** Measured @ 1 kHz with 0 ADC on Wayne Kerr 3245A, or equivalent.  
**Incremental Current** The amount of DC that decreases the Inductance by 5% maximum relative to the 0 ADC.  
**Dielectric Withstanding Voltage** Meets MIL-STD-202, Method 301, 1000 Vrms Minimum  
**Marking** Delevan; dash number; date code/lot symbol (YYWWL).  
 Note: An R before the date code/lot symbol indicates a RoHS Compliant choke.  
 Example: 5500R-392K

DELEVAN  
392  
R 1822A

**Thermal Shock** Meets MIL-STD-202, Method 107, Test Condition A-1 (-55°C to +130°C).  
**Mechanical Shock** Meets MIL-STD-202, Method 213, Test Condition I.  
**Vibration** Meets MIL-STD-202, Method 204, Test Condition D  
**Solderability** Meets MIL-STD-202, Method 208  
**Terminal Material and Final Finish**  
 Series 5500R: (Tin - Silver - Copper) Sn96.5Ag3.0Cu0.5 over Copper (Cu)  
 Series 5500: (Tin - Lead) Sn63Pb37 over Copper (Cu)  
**Weight** 13 Grams Maximum

**Packaging** Tape and Reel (44mm): 13" reel, 200 pieces max: 7" reel not available  
**Made In The U.S.A.**

DASH NUMBER\* ±10% (µH @ 1.00 kHz) INDUCTANCE MAXIMUM (OHMS) DC-RESISTANCE MAXIMUM (A DC) CURRENT RATING MAXIMUM (A DC) INCREMENTAL CURRENT (A DC)

SERIES 5500R AND 5500				
-392K	3.9	0.007	11.91	9.13
-472K	4.7	0.008	11.14	8.30
-562K	5.6	0.011	9.50	7.61
-682K	6.8	0.012	9.10	7.02
-822K	8.2	0.013	8.74	6.52
-103K	10	0.016	7.88	5.71
-123K	12	0.018	7.43	5.07
-153K	15	0.020	7.05	4.57
-183K	18	0.022	6.72	4.15
-223K	22	0.024	6.43	3.65
-273K	27	0.025	6.30	3.38
-333K	33	0.028	5.96	3.04
-393K	39	0.031	5.66	2.85
-473K	47	0.034	5.41	2.61
-563K	56	0.043	4.81	2.34
-683K	68	0.060	4.08	2.12
-823K	82	0.066	3.88	1.94
-104K	100	0.084	3.44	1.76
-124K	120	0.113	2.96	1.60
-154K	150	0.129	2.78	1.43
-184K	180	0.150	2.57	1.30
-224K	220	0.162	2.48	1.19
-274K	270	0.226	2.10	1.07
-334K	330	0.257	1.97	0.96
-394K	390	0.288	1.86	0.88
-474K	470	0.393	1.59	0.81
-564K	560	0.504	1.40	0.74
-684K	680	0.570	1.32	0.68
-824K	820	0.643	1.24	0.63
-105K	1,000	0.844	1.08	0.56
-125K	1,200	0.977	1.01	0.51
-155K	1,500	1.18	0.92	0.45
-185K	1,800	1.50	0.81	0.41
-225K	2,200	1.76	0.75	0.37
-275K	2,700	2.13	0.68	0.32
-335K	3,300	2.53	0.63	0.30
-395K	3,900	2.84	0.59	0.28
-475K	4,700	3.79	0.51	0.25
-565K	5,600	4.24	0.48	0.23
-685K	6,800	5.75	0.42	0.21
-825K	8,200	6.44	0.39	0.19
-106K	10,000	7.30	0.37	0.17
-126K	12,000	9.34	0.33	0.16
-156K	15,000	10.7	0.30	0.14
-186K	18,000	14.8	0.26	0.13
-226K	22,000	18.0	0.23	0.12
-276K	27,000	22.7	0.21	0.10
-336K	33,000	25.7	0.20	0.09
-396K	39,000	29.7	0.18	0.09
-476K	47,000	33.7	0.17	0.08
-566K	56,000	38.0	0.16	0.07
-686K	68,000	52.8	0.14	0.07
-826K	82,000	67.3	0.12	0.06
-107K	100,000	76.0	0.11	0.05

OPTIONAL TOLERANCES: J = +/- 5% L = +/- 15%  
 The Suffix (Optional Tolerance "J" or "L") should replace the "K", in the dash number.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [API Delevan](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)  
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)  
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)  
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)