


**SERIES**

**DC1050R  
DC1050**




**High Current Power Line Chokes**

DASH NUMBER\*  
INDUCTANCE (μH)  
±10% @ 1.00 kHz  
MAXIMUM (OHMS) @ 25°C  
DC RESISTANCE  
CURRENT RATING  
MAXIMUM (A DC)  
INCREMENTAL  
CURRENT (A DC)  
LEAD DIAMETER  
(Inches, Reference)



Actual Size (Max.)

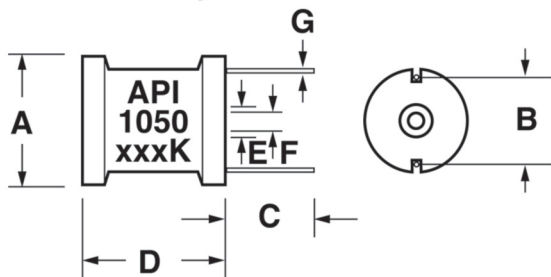

SERIES DC1050 and DC1050R					
-104K	100	0.034	7.5	9.0	0.046
-124K	120	0.046	6.5	8.0	0.040
-154K	150	0.064	5.5	7.0	0.040
-184K	180	0.072	5.1	6.5	0.040
-224K	220	0.080	4.8	6.0	0.040
-274K	270	0.110	4.2	5.0	0.036
-334K	330	0.122	4.0	4.5	0.036
-394K	390	0.169	3.4	4.0	0.032
-474K	470	0.187	3.2	3.8	0.032
-564K	560	0.205	3.0	3.5	0.032
-684K	680	0.256	2.7	3.0	0.029
-824K	820	0.288	2.5	2.8	0.029
-105K	1000	0.426	2.1	2.5	0.029
-125K	1200	0.462	2.0	2.2	0.026
-155K	1500	0.518	1.9	2.0	0.026
-185K	1800	0.705	1.6	1.8	0.026
-225K	2200	1.020	1.4	1.5	0.023
-275K	2700	1.140	1.3	1.4	0.023
-335K	3300	1.270	1.2	1.3	0.023
-395K	3900	1.670	1.1	1.2	0.020
-475K	4700	1.860	1.0	1.0	0.020

**Physical Parameters**

	Inches	Millimeters
A	1.080 to 1.180	27.44 to 29.98
B	0.770 Reference (all except -104K) 0.810 Reference (-104K only)	19.56 Reference 20.75 Reference
C	0.750 Minimum	19.05 Minimum
D	0.840 Maximum	21.34 Maximum
E	0.240 Reference	6.10 Reference
F	0.200 Reference	5.08 Reference
G	See Table	

\*Complete part # must include series # PLUS the dash #

**Operating Temperature Range** -55°C to +125°C;  
(-55°C to +80°C @ full current)

**Current Rating at 80° Ambient 45°C Temperature Rise**

**Maximum Power Dissipation at +80°C** 2.20 Watts  
Maximum

**Inductance** Measured @ 1 kHz with 0 ADC  
on Wayne Kerr 3245A, or equivalent

**Leads** Solder coated within 1/16" of Body

**Incremental Current** The amount of DC that decreases  
the inductance by 5% maximum, relative to the 0 ADC

**Dielectric Withstanding Voltage** 1000 Vrms Minimum

**Mechanical Configuration** Center hole allows for  
mounting

**Marking** API, 1050 or 1050R, dash number (per table)  
and inductance tolerance letter

- API
- 1050
- xxxK

**Packaging** Bulk only



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [API Delevan](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FA4R7JTR220F](#)