


SERIES

**P1330R
P1330**

RoHS
Compliant
Traditional
First Quality

Surface Mount Power Inductors

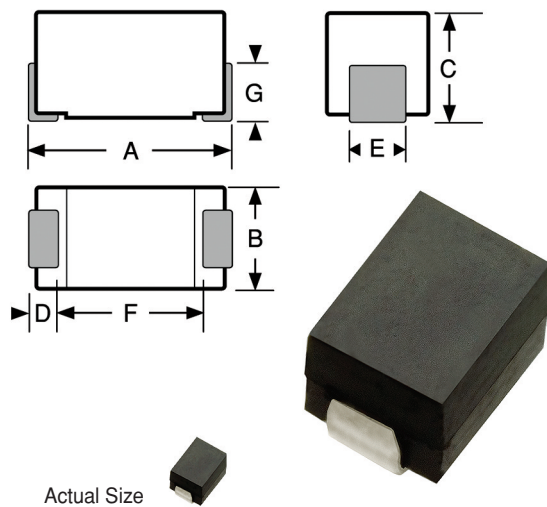

Physical Parameters

	Inches	Millimeters
A	0.300 to 0.325	7.62 to 8.26
B	0.105 to 0.125	2.67 to 3.18
C	0.125 to 0.145	3.18 to 3.68
D	0.020 Min.	0.508 Min.
E	0.040 to 0.060	1.02 to 1.52
F	0.190 (Ref. only)	4.83 (Ref. only)
G	0.070 (Ref. only)	1.78 (Ref. only)

Weight Max (Grams) 0.30

Operating Temperature Range -55°C to +125°C

Current Rating at 90°C Ambient 35°C Rise

Maximum Power Dissipation at 90°C 0.210 W

Inductance Measured at 1V with no DC current

Incremental Current The current at which the inductance will be decreased by a maximum of 5% from its initial zero DC value.

Marking Delevan; dash number followed by a P; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: P1330-104J
 DELEVAN
 104 P
 1819A

Packaging Tape & reel (16mm): 7" reel, 500 pieces max.; 13" reel, 2200 pieces max.

Made In the U.S.A.

DASH NUMBER*	INDUCTANCE (μH) ±10% @1 kHz	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA DC)	INCREMENTAL CURRENT (mA DC)
--------------	--------------------------------	---------------------------------	-----------------------------------	--------------------------------

SERIES P1330 FERRITE CORE				
-102K	1.0	0.045	2780	1526
-122K	1.2	0.048	2690	1400
-152K	1.5	0.053	2030	1291
-182K	1.8	0.055	1950	1180
-222K	2.2	0.075	1690	1104
-272K	2.7	0.085	1550	936
-332K	3.3	0.108	1460	840
-392K	3.9	0.118	1390	732
-472K	4.7	0.130	1330	720
-562K	5.6	0.150	1110	612
-682K	6.8	0.165	1080	600
-822K	8.2	0.180	1020	600
-103K	10	0.216	946	564
-123K	12	0.252	912	516
-153K	15	0.288	858	432
-183K	18	0.328	817	420
-223K	22	0.384	694	348
-273K	27	0.425	657	324
-333K	33	0.538	568	270
-393K	39	0.600	488	270
-473K	47	0.792	467	246
-563K	56	0.900	442	216
-683K	68	1.020	384	174
-823K	82	1.380	362	150
-104K	100	1.680	347	132
-124K	120	1.800	327	111
-154K	150	2.040	272	106
-184K	180	2.400	261	89
-224K	220	2.648	223	72
-274K	270	4.320	191	60
-334K	330	4.800	179	57
-394K	390	5.640	171	48
-474K	470	6.000	161	41
-564K	560	6.960	138	35
-684K	680	8.760	130	30
-824K	820	9.960	113	26
-105K	1000	11.160	105	22

Optional Tolerances: J = 5% H = 3% G = 2%
 *Complete part # must include series # PLUS the dash #

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [API Delevan](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FA4R7JTR220F](#)