

Threaded Miniature Spanner Filters

Excellent for applications that require many lines to be filtered in close proximity



Features

- Space saving #2-56 designed without a hex and does not require soldering for installation
- Easy swap that allows for flexibility in filter replacement and capacitance substitution
- Flexibility in filter placement
- Custom designs available

Applications


- Microwave applications
- Frequency synthesizers
- Power amplifiers
- Millimeter wave radios
- Commercial and high-reliability applications

Electrical Specifications

<i>Operating Temperature:</i>	-55°C to +125°C
<i>Voltage Rating:</i>	50 VDC
<i>Current Rating :</i>	5 A
<i>Effective Filtering:</i>	1 MHz to 10 GHz
<i>Capacitance:</i>	to 10,000 pF
<i>Dielectric Withstanding Voltage:</i>	125 VDC

Mechanical Specifications

<i>Center Spacing:</i>	0.110"
<i>Lead Finish:</i>	Gold
<i>Bushing Finish:</i>	Gold
<i>Tightening Torque:</i>	14 oz-in (± 2) (0.11Nm)

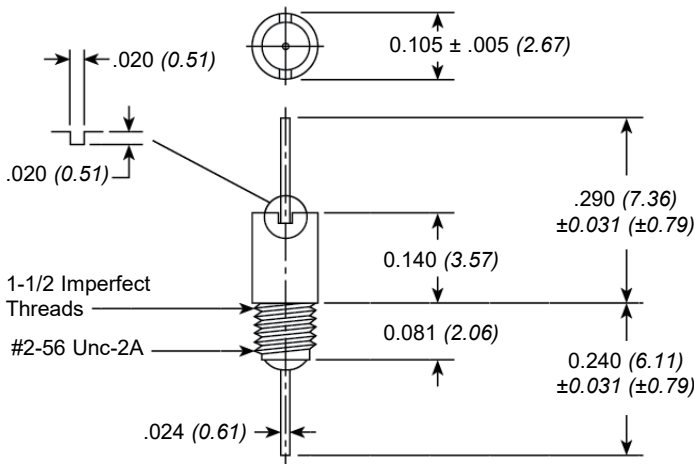

Built and tested in accordance with MIL-PRF-15733.
Dimensions in inches (mm)

Insertion Tool

Part Number: 54-874-020



Part Number	Cap (pF)	Max. Tolerance	Circuit	Current	Voltage	DWV	I.R.	Temperature Range
54-874-010	10	+0%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-011	39	+50%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-012	100	+50%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-013	390	+50%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-014	1000	+50%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-015	2000	+50%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-016	3300	+100%/-0%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-017	4700	+100%/-0%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C
54-874-018	10000	+80%/-20%	C	5 A	50 VDC	125 VDC	1000 MΩ	-55°C to +125°C

*Add an "F" after the 54 to designate RoHS, as the part numbers as shown are not RoHS. Example 54F-874-010

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Feedthrough Filters](#) category:

Click to view products by [Api Technologies](#) manufacturer:

Other Similar products are found below :

[FN7611-63-M6](#) [FN7612-10-M3](#) [FN7660-100-M8](#) [1202F-054](#) [1609991-8](#) [1609992-2](#) [16DFC6-C](#) [16FFD6-HE](#) [2-1609992-2](#) [2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [1609990-8](#) [1609991-3](#) [1609992-1](#) [1609992-3](#) [1609993-1](#) [1609993-7](#) [200AFC6-P](#) [200DFC6-P](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-10-M3](#) [FN7612-63-M6](#) [2450-001-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [32AFC6-H](#) [4100-000LF](#) [4201-050LF](#) [4204-001LF](#) [4253-002LF](#) [4306-019LF](#) [4101-004LF](#) [4201-003LF](#) [4208-000LF](#) [4600-067](#) [094-6526-0000](#) [100AFC6-G](#) [10AFC6-B](#) [10DFC6-C](#) [1-1609990-3](#) [1-1609990-7](#) [1-1609992-8](#) [1-1609990-1](#) [1-1609991-1](#) [FN7514-32-M4](#) [FN7511-10-M3](#) [SXD1A3-251](#)