NOTES:

1. ELECTRICAL SPECIFICATIONS:

CENTER FREQUENCY = 1575.42 ± 3.00 MHz

BANDWIDTH AT -10 dB S11: 8 MHz


BORE SIGHT AXIAL RATIO: 3 dB AT CENTER FREQUENCY

GAIN: 2.0 dBic AT CENTER FREQUENCY RIGHT HAND CIRCULAR POLARIZATION

IMPEDANCE: 50 OHMS

- 2. SPECIFICATIONS ARE FOR UNPACKAGED ANTENNA.
- FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONSULT SPECTRUM FOR SPECIFIC APPLICATIONS.
- 4. TESTING TO BE PERFORMED ON AN ALUMINUM GROUND PLANE, 1.375 [35MM] X 1.375 [35MM] INCHES, IN FREE SPACE.
- 5. MEASUREMENT FOR PIN IS TAKEN FROM FACE OF ADHESIVE (.005 DIMENSION) WITH PAPER REMOVED.
- 6. DIMENSIONS IN BRACKETS IN MILLIMETERS.



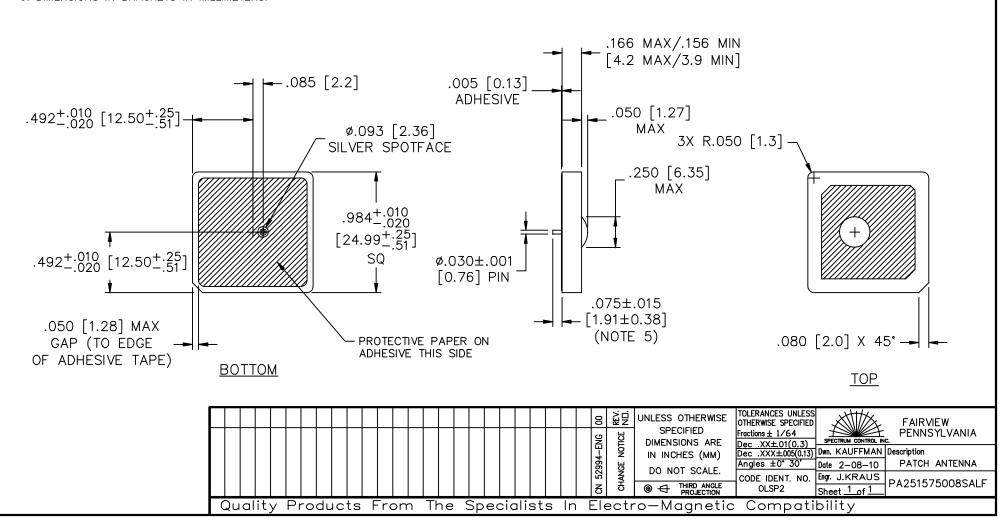

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Api Technologies manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352