

SA Series

Surface Mount Filter Arrays

Features

- The filters structure minimizes residual inductance with a high self resonant frequency, ensuring large insertion loss in a wide band.
- The common ground electrode built into the chip ensures complete grounding of all lines at the ground on both ends. The filter is designed to control cross talk.
- An optimum constant can be selected from the capacity range of 22-22,000 pF to best suit the frequency.
- Solder plated nickel barrier terminations offer good solderability and resistance to soldering heat.
- RoHS compliant/lead free



Applications

- Computer peripheral equipment
- Telecommunications equipment
- Power amplifiers
- Power supplies
- Temperature and motor controls

Typical Electrical Characteristics


Rated Voltage	25 VDC to 50 VDC
Rated Current	0.3 Amps
IR	10,000 MΩ Min.
DC Resistance	0.3Ω Max.
Temperature Range	-55°C to +125°C
Capacitance Range	22 pF to 22,000 pF
Capacitance Tolerance	±20%

Specifications


Part Number	Rated Voltage (@ 50/60Hz)	Rated Current	Temperature Characteristic	IR	DC Resistance	Operating Temp.	Capacitance (pF)
SA1206C220	50 VDC	0.3A DC	C	10,000MΩ min.	0.3Ω max.	-55/+125°C	22
SA1206C470			C				47
SA1206C101			C				100
SA1206C221			C				220
SA1206R471			U				470
SA1206R102			R				1,000
SA1206R222			R				2,200
SA1206R223			25 VDC				R

Approximate part weight: 18.07mg/pc.


Circuit Schematic



Insertion Loss

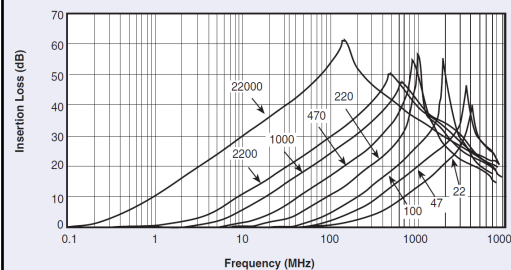

Dimensions


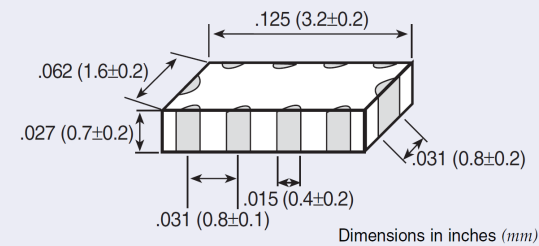


SA Series

Surface Mount Filter Arrays

Ordering Information

SA	1206	C	220	M	B	N	T
Style SA Series	Temperature Characteristics C +/- 30 ppm/°C R +/- 15% U -750 +/- 120 ppm/°C	Capacitance Tolerance M = +/- 20%	Rated Voltage (VDC) A = 25 B = 30	Termination N = Ni Barrier Solder Plated	Size 1206	Capacitance 22pF 47pF 100pF 220pF 470pF 1,000pF 2,000pF 22,000pF	Packaging T - Tape and reel 4,000 pc/reel

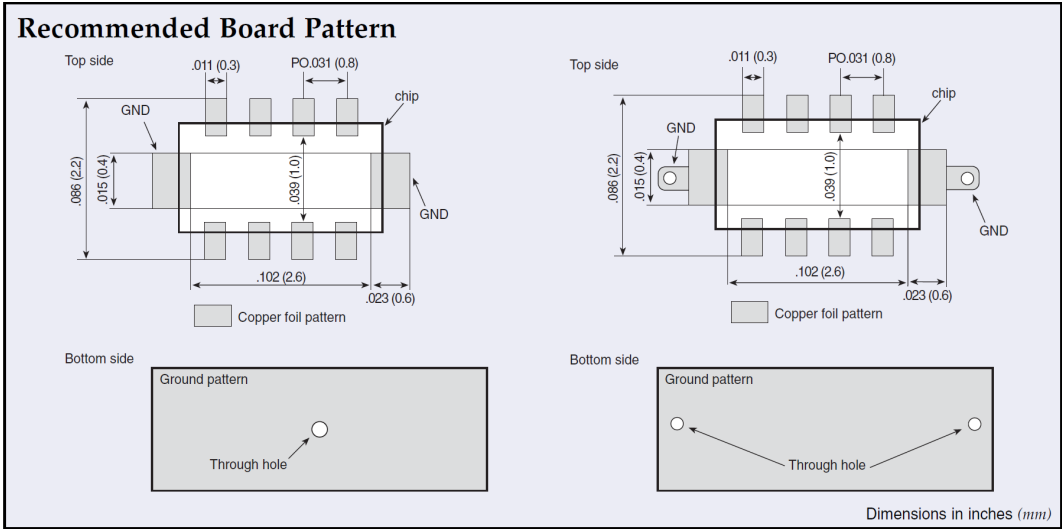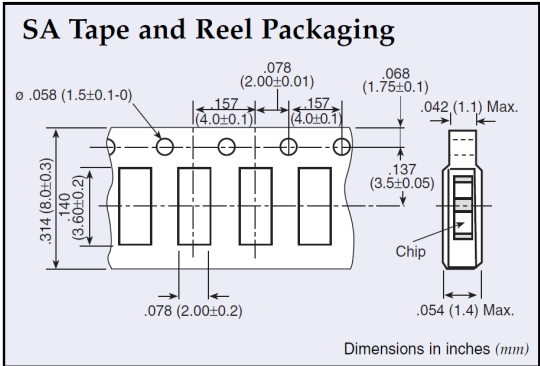

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Beads](#) category:

Click to view products by [Api Technologies](#) manufacturer:

Other Similar products are found below :

[CZB1EGTTP700P](#) [CZB1JGTTD101P](#) [CZB1JGTTD151P](#) [CZB1JGTTD601P](#) [CZB2AFTTD800P](#) [CZB2AGTTD601P](#) [CZB2BFTTE600P](#) [PE-0402FB121ST](#) [EMI0805R-11](#) [NCB0603R301TR050F](#) [NCB0805A320TR050F](#) [NCB-H1206B680TR300F](#) [SMB2.5-1TR](#) [SMB2.5R-2](#)
[2943778301](#) [CZB1EGTTP121P](#) [CZB1JGTTD102P](#) [CZB1JGTTD121P](#) [CZB1JGTTD221P](#) [CZB2AGTTD301P](#) [CZB2BFTTE601P](#) [4221R-1](#)
[4221R-2](#) [4221R-3](#) [EMI0805R-2000](#) [EMI0805R-600](#) [SBY100505T-100Y-N](#) [NCB-GH0402D121TR060F](#) [NCB-H1812D125TR150F](#)
[CZB2AGTTD102P](#) [NCB0402P301TR005F](#) [NCB0603R152TR030F](#) [NCB0805A121TR050F](#) [NCB3312K900TR500F](#) [NCB-](#)
[H0805A221TR300F](#) [NCB-H1806E181TR300F](#) [NCB0402P300TR030F](#) [NCB0402P700TR050F](#) [NCB0805A102TR040F](#)
[NCB1806E151TR020F](#) [NCB-H0603R121TR300F](#) [NCB-H0805A220TR600F](#) [NCB-H0805A390TR400F](#) [CIM21J252NE](#) [CZB2BFTTE121P](#)
[EMI0805R-220](#) [74279250](#) [7427924](#) [CZB1JGTTD202P](#) [ABUPDE160808121Y00](#)