
NOTES: 1. ELECTRICAL SPECIFICATIONS: CENTER FREQUENCY = 1575.42±3.00 MHz DEFINITION OF CENTER FREQ: MIDPOINT OF -10 dB S11 BANDWIDTH BANDWIDTH AT -10 dB S11: 8 MHz RETURN LOSS: -14 dB MIN. @ CENTER FREQUENCY BORE SIGHT AXIAL RATIO: 3 dB AT CENTER FREQUENCY GAIN: 2 dBic AT CENTER FREQUENCY RIGHT HAND CIRCULAR POLARIZATION IMPEDANCE: 50 OHMS 2. SPECIFICATIONS ARE FOR UNPACKAGED ANTENNA. 3. FOOTPRINT AND ELECTRICAL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONSULT SPECTRUM FSY MICROWAVE FOR SPECIFIC APPLICATIONS. 4. TESTING TO BE PERFORMED ON AN ALUMINUM GROUND PLANE. 1.375 [35MM] X 1.375 [35MM] INCHES, IN FREE SPACE. 5\MEASUREMENT FOR PIN IS TAKEN FROM FACE OF ADHESIVE (.005 DIM) WITH PAPER REMOVED. 6. DIMENSIONS IN BRACKETS IN MILLIMETERS. .166 MAX/.156 MIN [4.2 MAX/3.9 MIN] -.085 [2.2] .005 [0.13] **ADHESIVE** .050 [1.27] $.492^{+.010}_{-.020}$ [12.50 $^{+.25}_{-.51}$] MAXø.093 [2.36] 3X R.050 [1.3] -SILVER SPOTFACE .250 [6.35] MAX.984+.010 [24.99^{+.25}] $.492^{+.010}_{-.020}$ [12.50 $^{+.25}_{-.51}$] ø.030±.001 [0.76] PIN

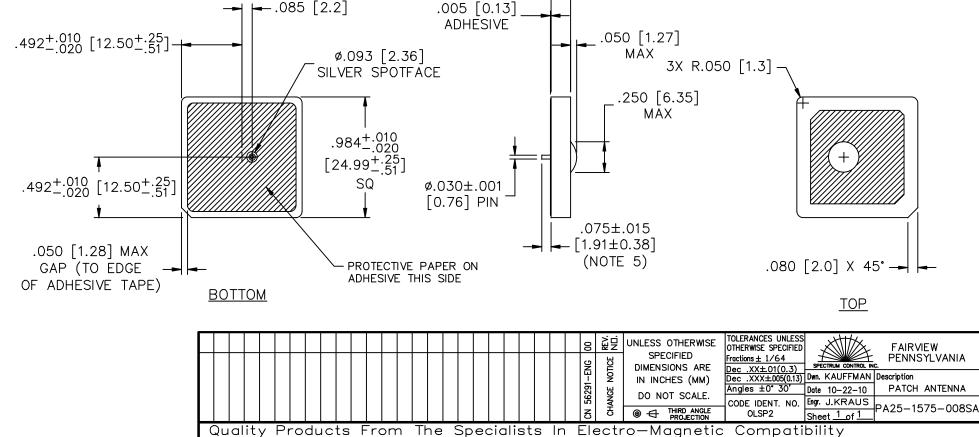

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Api Technologies manufacturer:

Other Similar products are found below:

CCT FM1 ABFT AD-NM-SMAF 001-0021 CTC110 MAF94149 EXE902SF MMCX-SMA-100 PDQ24496-91NF GAN30084EU 930-033-R A08-HABUF-P5I AAF95035 DG-ANT-20DP-BG-B APAMPGJ-141 1513563-1 OF86315-FNF OP24516DS-91NM A09-HASM-7 EXE902MD EXE902SM SPDA17806/2170LAR APAMPG-117 GPS1575SP26-004 GPS15MGSMA CMD69273P-30NF CMQ69273-30NF RD2458-5-OTDR-NM RD2458-5-RSMA TRAB24/49003 W4120ER5000 W6102B0100 YE572113-30RSMM 108-00014-50 SPDA17RP918 OP24516SX-91NM OP24516SX-91RSMM CMQ69273P-30NF CMS69273-30NF CMS69273P-30NF TRAB24003N TRAB24003NP TRAB8213NP TRAB8903 A09-Y8NF A09-Y11NF A09-HSM-7 A09-F8NF-M A09-F5NF-M