

Description

The AUXXX1D1F-T are transient voltage suppressor designed to protect sensitive electronic equipment from damage induced by lightning and voltage transients.

Features

- Glass passivated or planar junction
- Excellent clamping capability
- Repetition rate (duty cycle): 0.01%
- Low profile package and low inductance
- Fast response time: typically less than 1.0ps from 0V to VBR min.
- High temperature soldering: 260°C/10s at terminals.
- Plastic package has Underwriters Laboratory Flammability 94V-0.
- For surface mounted applications in order to optimize board space.


Mechanical Characteristics

- Package: SOD-123FL Molded plastic
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Polarity: Color band denotes cathode except bi-directional models
- Terminal Connections: See Diagram Below
- Marking Information: See Below



Applications

- I/O Interface.
- AC/DC Power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

Marking Information

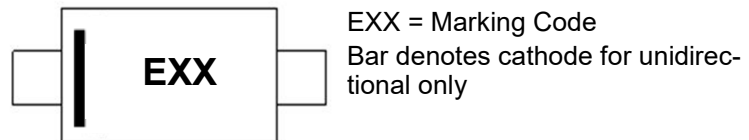

Device Schematic

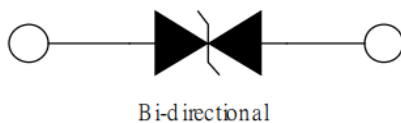

Circuit Schematic

Ordering Information

Part Number	Packaging	Reel Size
AUXXX1D1F-T	3000/Tape & Reel	7 inch

Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise specified)

Part Number	Marking code	Reverse Stand off Voltage VRWM (Volts)	Breakdown Voltage VBR (Volts) @IT		Test Current IT (mA)	Maximum Clamping Voltage Vc @IPP (Volts)	Maximum Peak Pulse Current Ipp (8/20Amps)	Maximum Reverse Leakage IR@VRWM (μA)	Junction Capacitance Cj (pF)
			MIN	MAX					Typ.
AU0751D1F-T	EHM	7.0	7.7	8.6	10	16.0	220	50	1650
AU0761D1F-T	ETM	7.0	7.7	8.6	10	16.0	220	50	870
AU1251D1F-T	EIE	12	13.3	14.7	1	24.0	190	1	1020
AU1261D1F-T	EUE	12	13.3	14.7	1	24.0	190	1	490
AU1551D1F-T	EIM	15	16.7	18.5	1	26.0	180	1	1000
AU1561D1F-T	EUM	15	16.7	18.5	1	26.0	180	1	400
AU1851D1F-T	EIT	18	20.0	22.1	1	30.0	160	1	650
AU1861D1F-T	EUT	18	20.0	22.1	1	30.0	160	1	320
AU2051D1F-T	EIV	20	22.20	24.50	1	35.0	150	1	310
AU2061D1F-T	EUV	20	22.20	24.50	1	35.0	150	1	310
AU2451D1F-T	EIZ	24	26.70	29.50	1	40.0	170	1	300
AU2461D1F-T	EUZ	24	26.70	29.50	1	40.0	170	1	300
AU2651D1F-T	EJE	26	28.90	31.90	1	44.0	130	1	290
AU2661D1F-T	EVE	26	28.90	31.90	1	44.0	130	1	290
AU2851D1F-T	EJG	28	31.10	34.40	1	48.0	120	1	280
AU2861D1F-T	EVG	28	31.10	34.40	1	48.0	120	1	280

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

Figure 1: Pulse Derating Curve

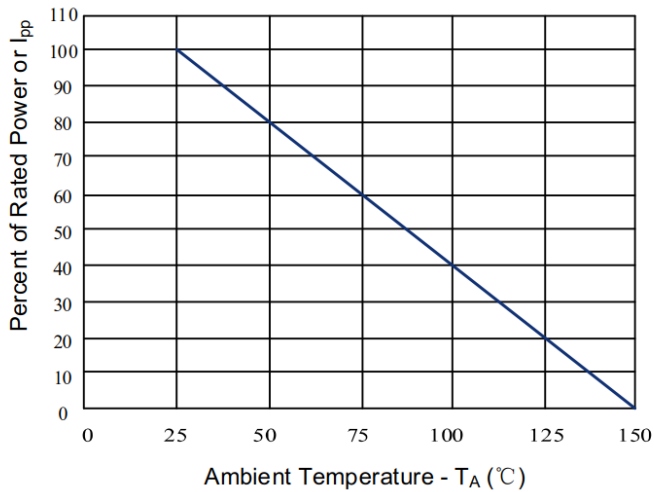


Figure 2: 8/20 μs Pulse Waveform

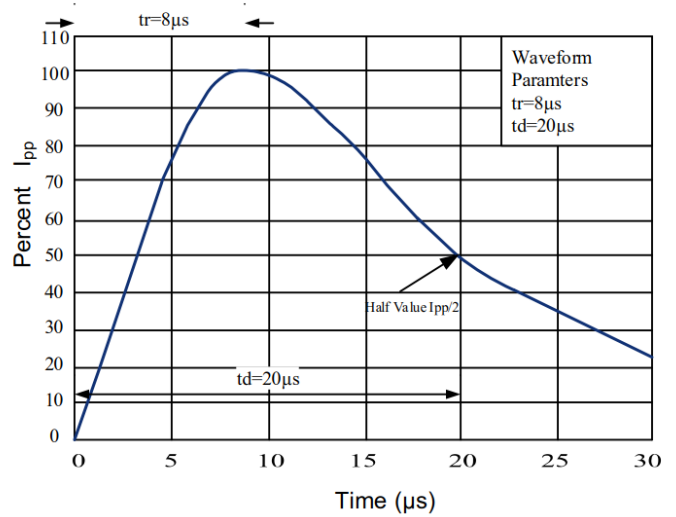


Figure 3: Peak Pulse Power Rating Curve



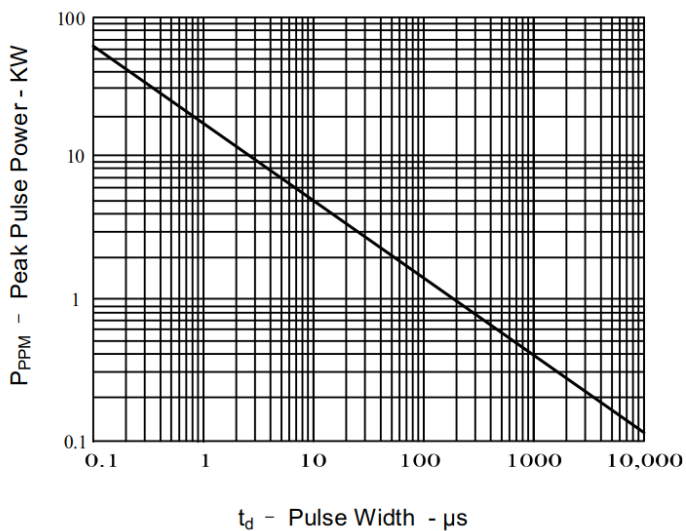


Figure 4: Steady State Power Dissipation Derating Curve

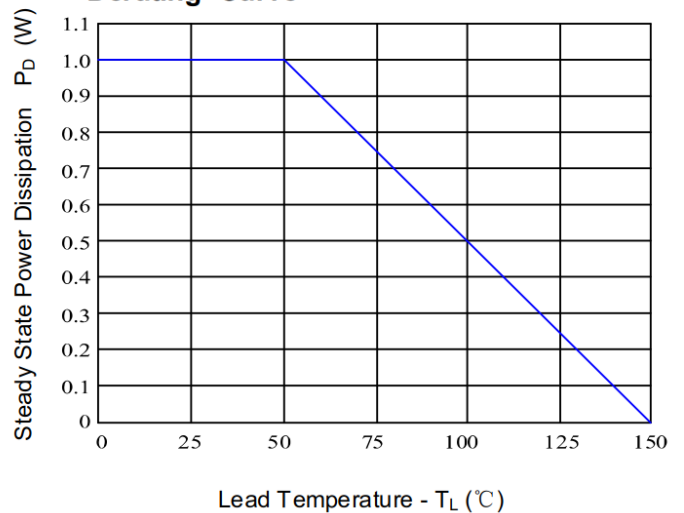


SOD-123FL Package Outline Drawing

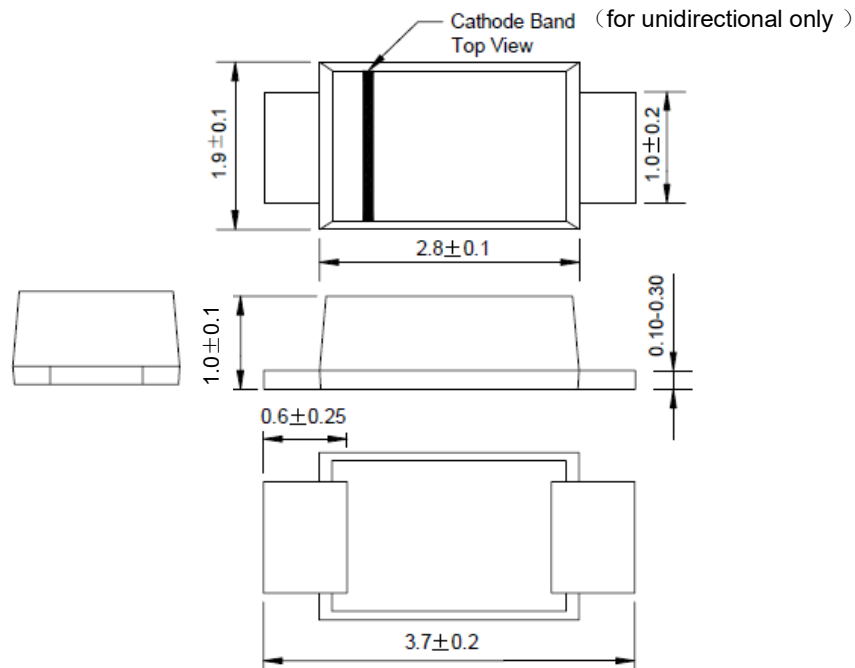

Dimensions in millimeters

Suggested Land Pattern

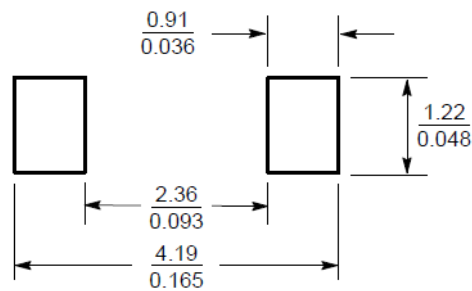

SCALE 10:1 ($\frac{\text{mm}}{\text{inches}}$)

Contact Information

Applied Power Microelectronics Co., Ltd.
 Website: <http://www.appliedpowermicro.com>
 Email: sales@appliedpowermicro.com
 Phone: +86 (0519) 8399 3606

Applied Power Microelectronics Co., Ltd. (APM) reserves the right to make changes to the product specification and data in this document without notice. APM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APM assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Applied Power](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#)
[CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [MMAD1108/TR13](#)
[5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#) [5KP90CA](#)