

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,00 - 3,25
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 3,00 / 15324994 | | 3,13 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 1005
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 3,00 - 3,25
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1005 3,00 / 15324994 | | 3,13 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1005:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, PVDF, XLPE
 Insul. Wall Designator: THIN



Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,45 - 3,81
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 3,00 / 15324994 | | 3,63 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

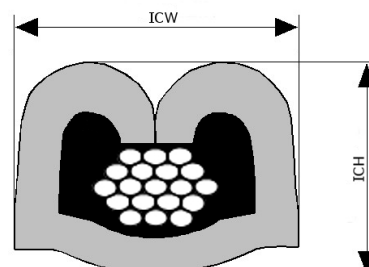

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1007
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 3,45 - 3,81
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1007 3,00 / 15324994 | | 3,63 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1007:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPA/PVDF, XLPE
 Insul. Wall Designator: REGULAR

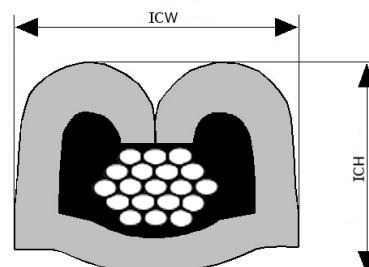

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 4,00 - 4,25
 Seal(s): 15324996

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 3,00 / 15324996 | | 4,13 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

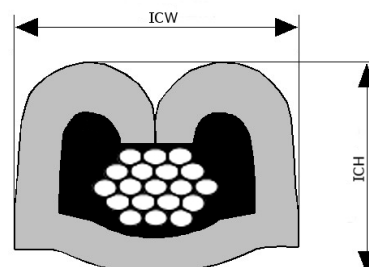

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1009
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
 Insulation Range Φ [mm]: 4,00 - 4,25
 Seal(s): 15324996

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1009 3,00 / 15324996 | | 4,13 | 250 | 2,05 | 0,05 | 3,70 | 0,10 | 6,20 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1009:

Industry Designator: SAE
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, XLPE
 Insul. Wall Designator: SPECIAL

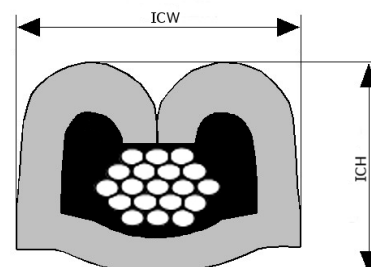

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 3,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*



Cable Type codes: 1043
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 3,40 - 3,81
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 1043 3,00 / 15324994 | | 3,61 | 250 | 1,95 | 0,05 | 3,70 | 0,10 | 6,10 | 0,20 | 6,60 | 0,20 |

Cable type code legend:

1043:

Industry Designator: SAE
 Conductor Material: STEEL
 Conductor Plating: NONE
 Insul. Material: XLPE
 Insul. Wall Designator: REGULAR

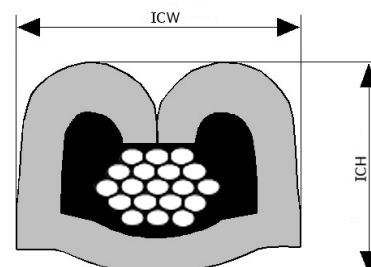

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 2,50 | 4,00



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2005
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,70 - 3,80
 Seal(s): 12059258

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2005 2,50 / 12059258 | | 2,85 | 359 | 1,95 | 0,05 | 3,60 | 0,10 | 5,80 | 0,10 | 6,70 | 0,20 |
| 2005 4,00 / 12059258 | | 3,60 | 368 | 2,05 | 0,05 | 3,65 | 0,10 | 5,95 | 0,10 | 6,90 | 0,20 |

Cable type code legend:

2005: FLR2X (SAAB C)
 Industry Designator: ISO
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PVC, TPE, XLPE
 Insul. Wall Designator: THIN

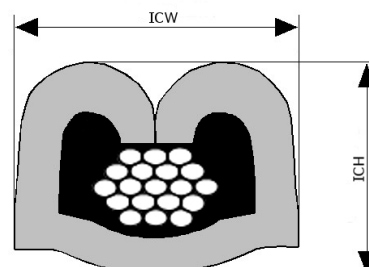

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 2,50 | 3,00 | 4,00

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,60 - 3,70
 Seal(s): 15324994 | 12059258

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2010 2,50 / 15324994 | | 2,80 | 225 | 1,85 | 0,05 | 3,60 | 0,10 | 6,00 | 0,10 | 6,20 | 0,20 |
| 2010 3,00 / 15324994 | | 3,10 | 300 | 2,10 | 0,05 | 3,15 | 0,10 | 6,10 | 0,20 | 6,60 | 0,20 |
| 2010 4,00 / 15324994 | | 3,45 | 265 | 2,05 | 0,05 | 3,60 | 0,10 | 6,25 | 0,20 | 6,60 | 0,20 |
| 2010 4,00 / 12059258 | | 3,45 | 357 | 2,05 | 0,05 | 3,65 | 0,10 | 5,95 | 0,10 | 6,90 | 0,20 |

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

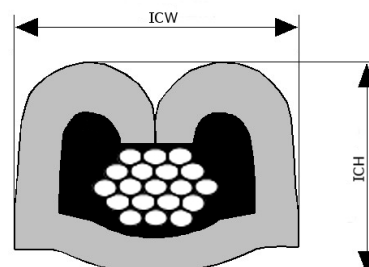

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 2,50



*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*

Cable Type codes: 2017
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,60 - 3,00
 Seal(s): 12059258

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 2017 2,50 / 12059258 | | 2,80 | 331 | 1,95 | 0,05 | 3,60 | 0,10 | 5,80 | 0,10 | 6,70 | 0,20 |

Cable type code legend:

2017: FLR41X-B, FLRY-A
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: SN
 Insul. Material: PA, PP, PVC, XLPE
 Insul. Wall Designator: THIN

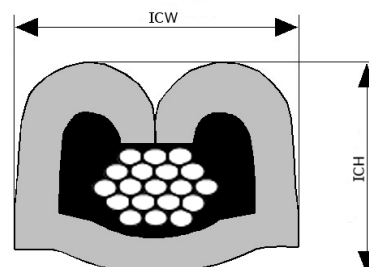

Crimp Information Sheet

Terminal Part Number: 12064737
 Surface Plating: SN
 Material Thickness [mm]: 0,38
 Cross Section [mm²]: 2,50

*This document is non-contractual
 and for information only.
 For more information, please
 consult your local sales office*


Cable Type codes: 8000
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,70 - 3,00
 Seal(s): 15324994

| Cable type / seal | Arrangement | Nominal Insul. diam [mm] | Tear-out force [N] | CCH [mm] | Tol CCH [mm] | CCW [mm] | Tol CCW [mm] | ICH [mm] | Tol ICH [mm] | ICW [mm] | Tol ICW [mm] |
|----------------------|-------------|--------------------------|--------------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|
| 8000 2,50 / 15324994 | | 2,85 | 225 | 1,85 | 0,05 | 3,60 | 0,10 | 6,00 | 0,10 | 6,20 | 0,20 |

Cable type code legend:

8000:

Industry Designator: N/G
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: SYNTHRESIN
 Insul. Wall Designator: THIN



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [APTIV](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60993906-B](#) [72.330.1035.1](#) [F358300-B](#) [F407400](#) [776880-1](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#)
[964562-4](#) [968782-1](#) [98891-1012](#) [12004475-L](#) [12041318-B](#) [12052466](#) [12015909](#) [1-21030-1](#) [12041318](#) [12047957](#) [12185550](#) [12336-12](#)
[12147304](#) [13681974](#) [13783086](#) [13832576](#) [13542772](#) [13675513](#) [13964573](#) [1428188-1](#) [1437287-3](#) [1438231-5](#) [1428188-2](#) [DS07-19S-5020](#)
[1456983-5](#) [1456987-7](#) [APD-7CP-H](#) [APK-SB25A10L](#) [1452931-2](#) [15491972](#) [15305306](#) [15396680](#) [15425613](#) [15518544](#) [15522351](#) [1719636-](#)
[1](#) [172190-2](#) [172190-5](#) [192900-0024](#)