

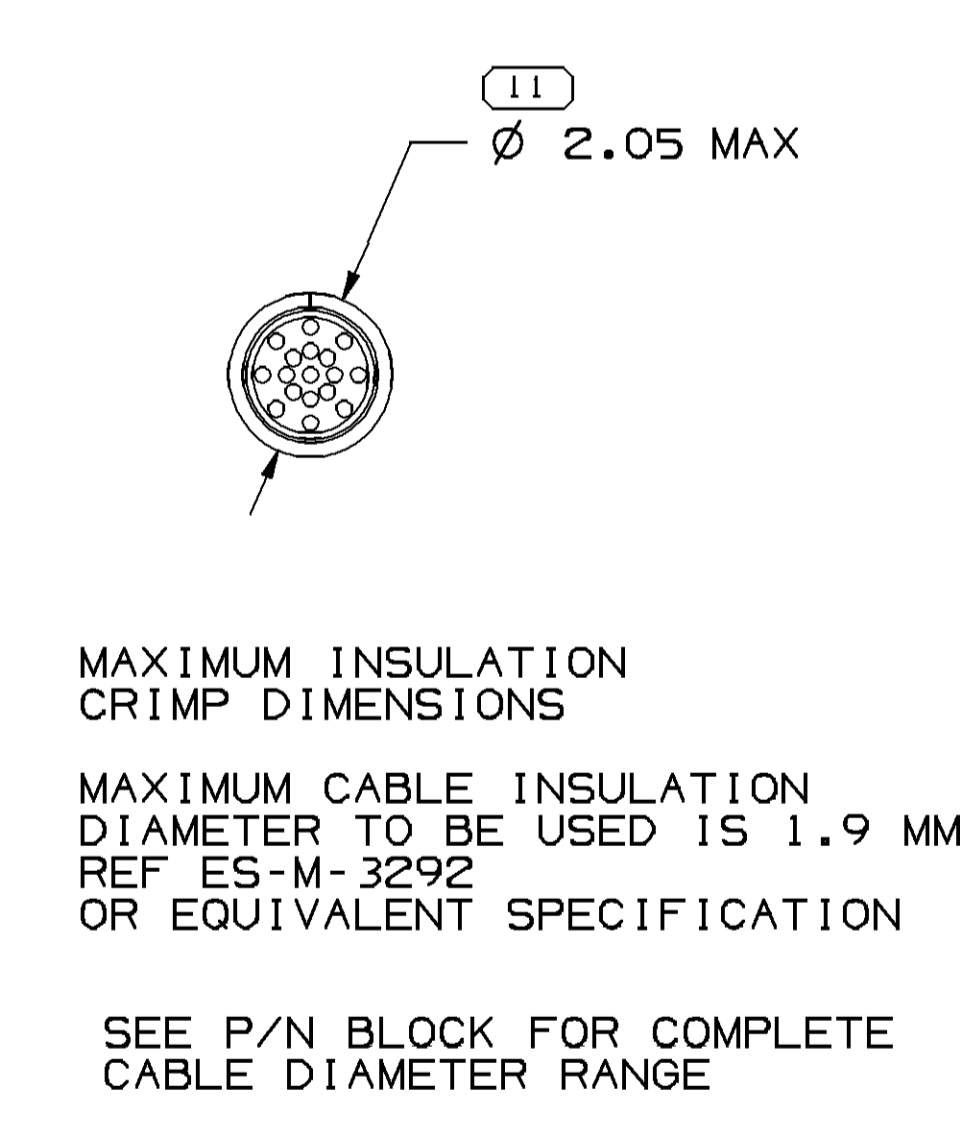
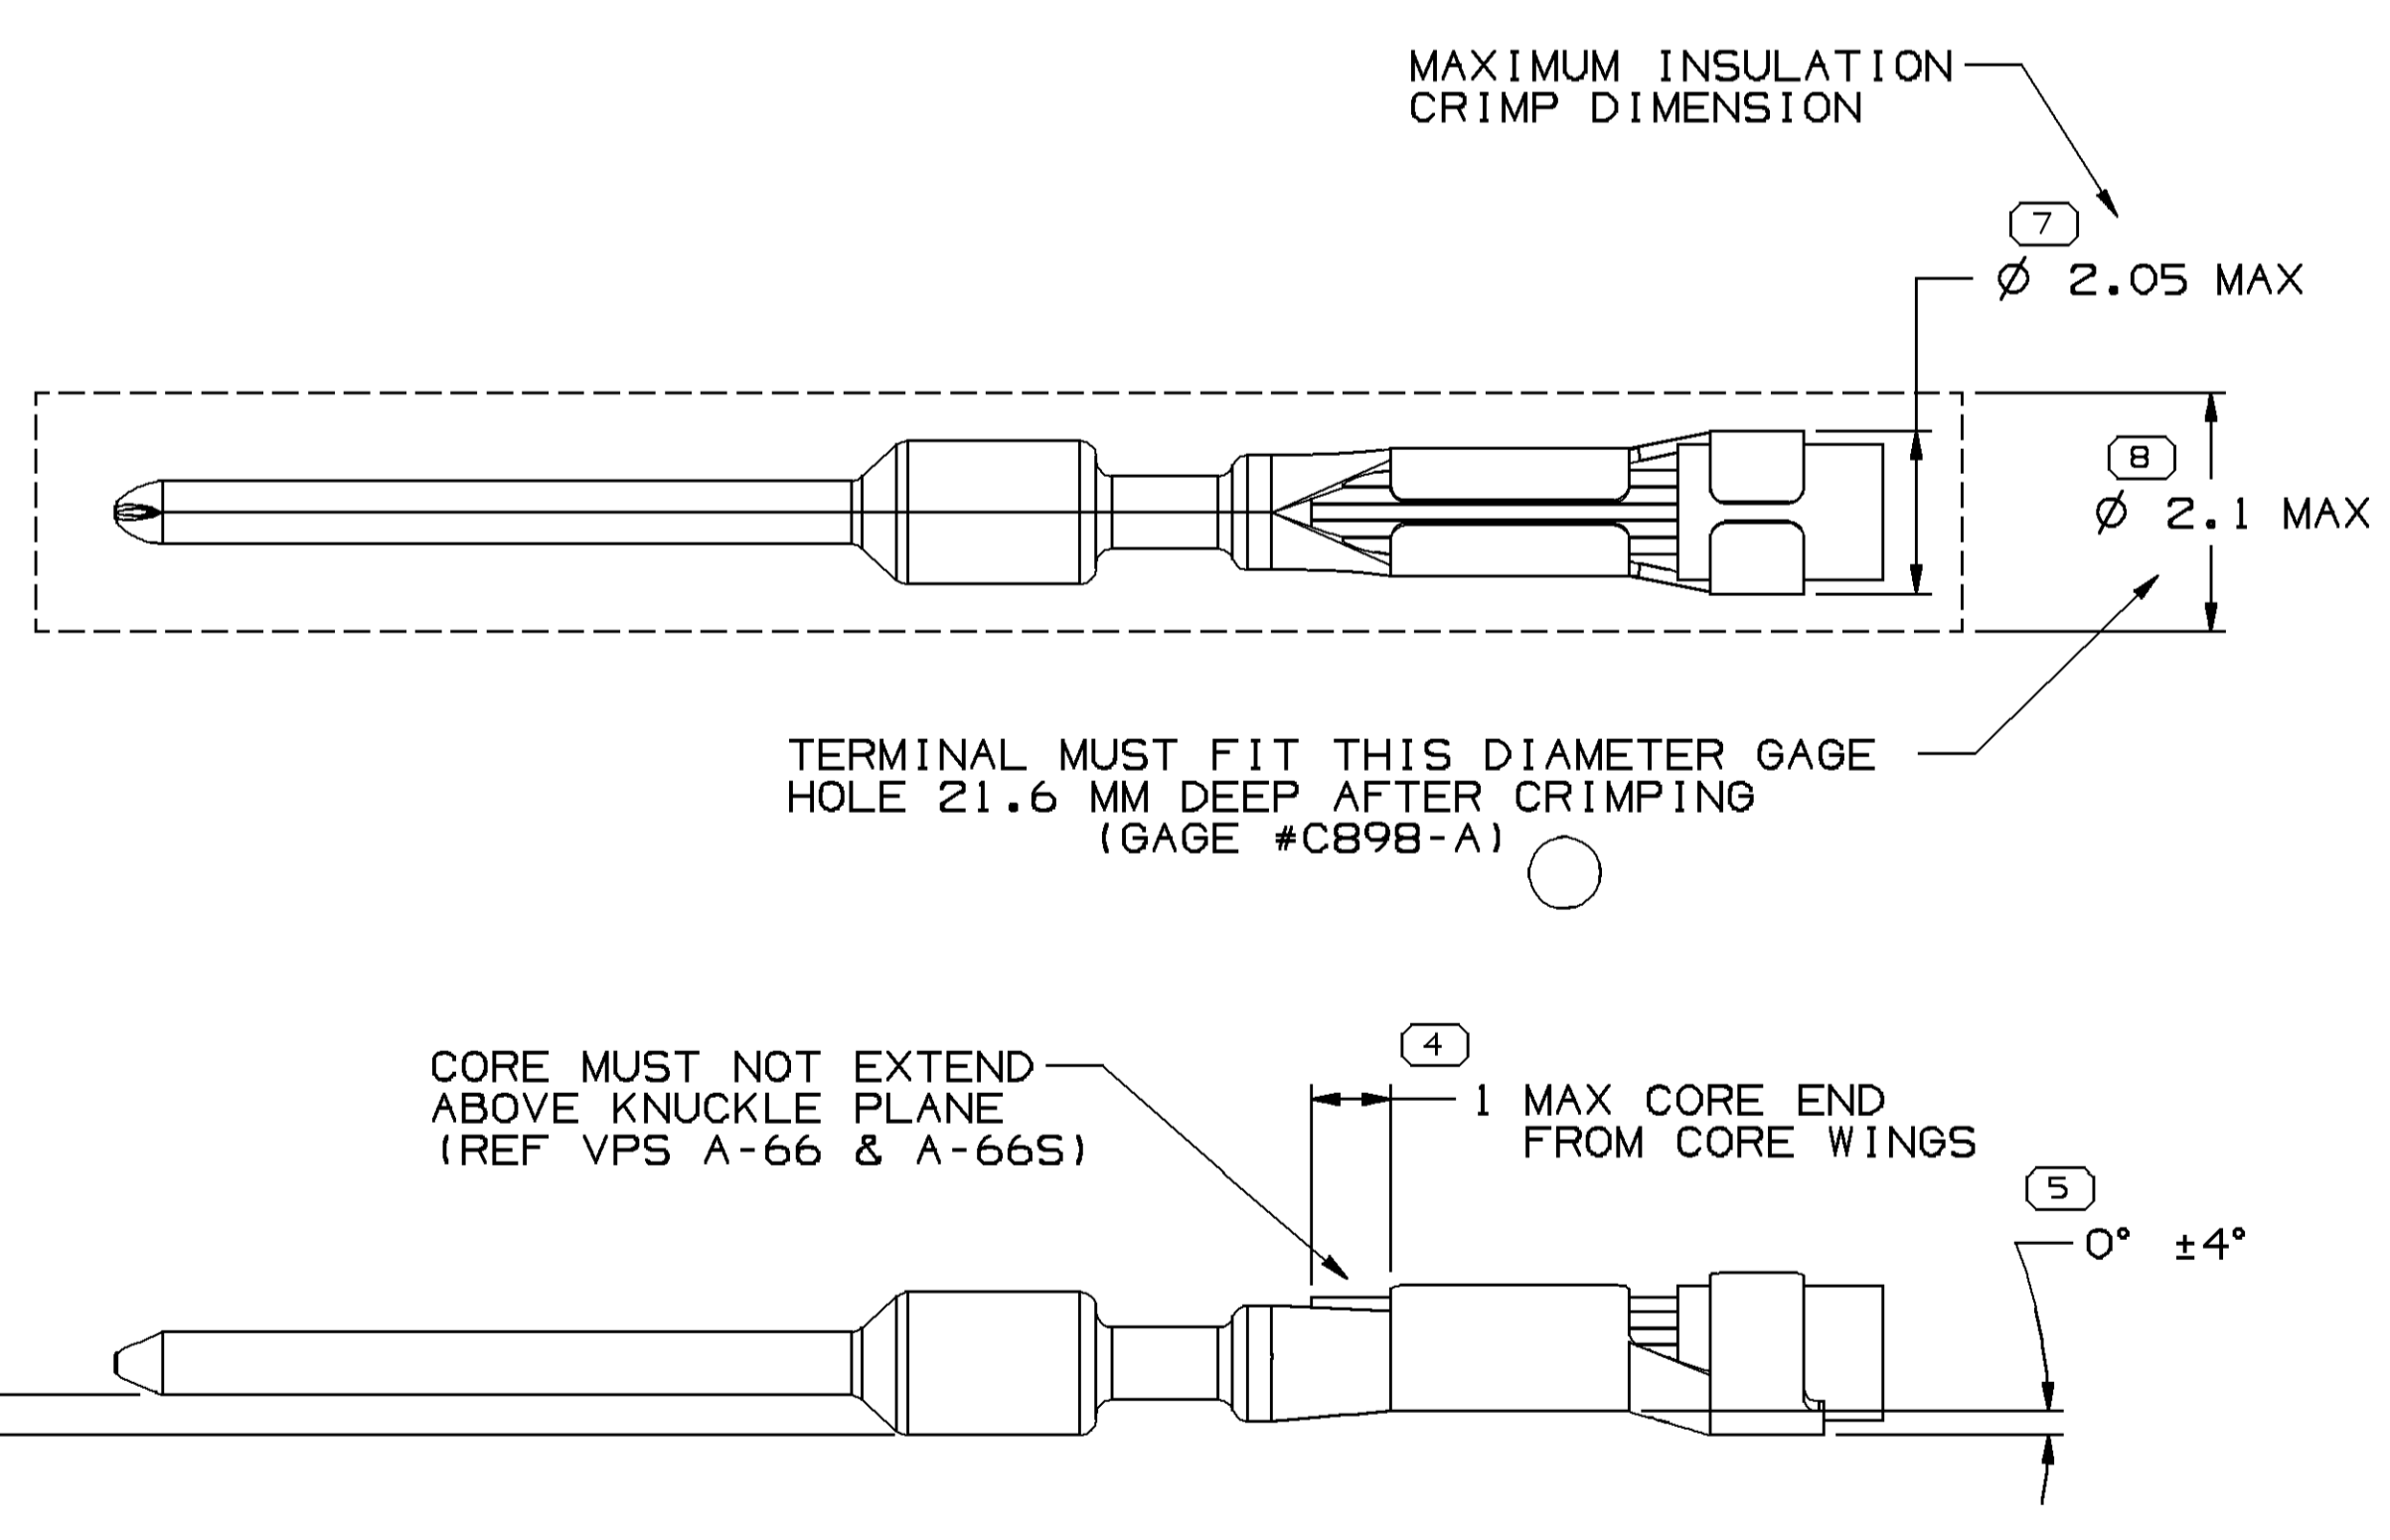
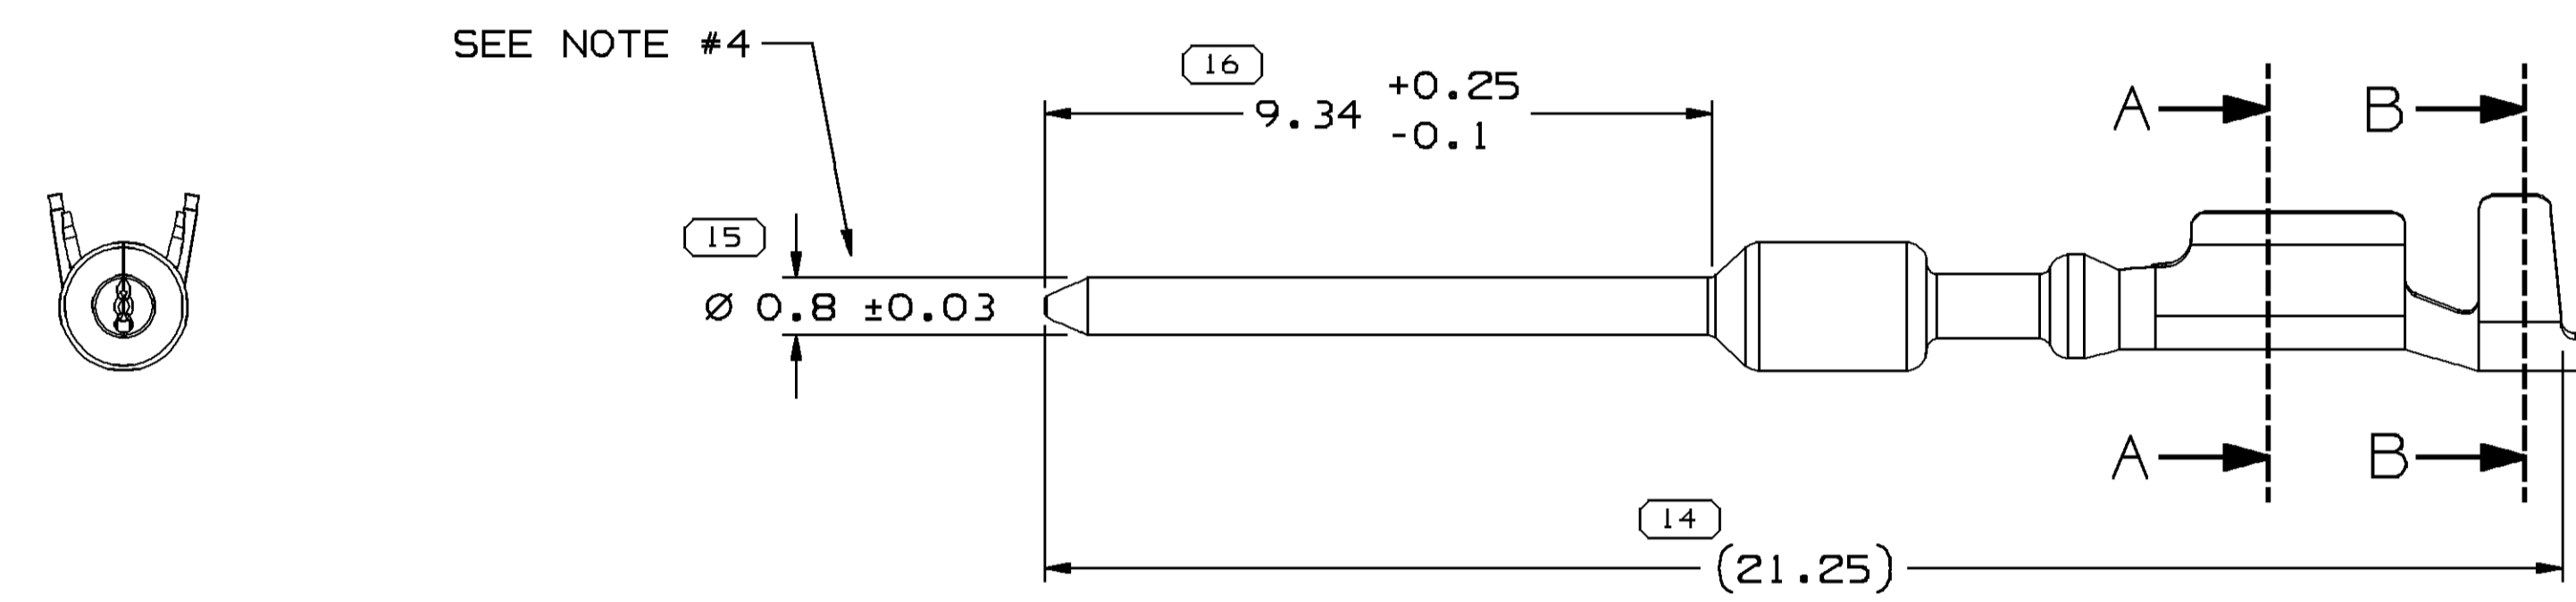
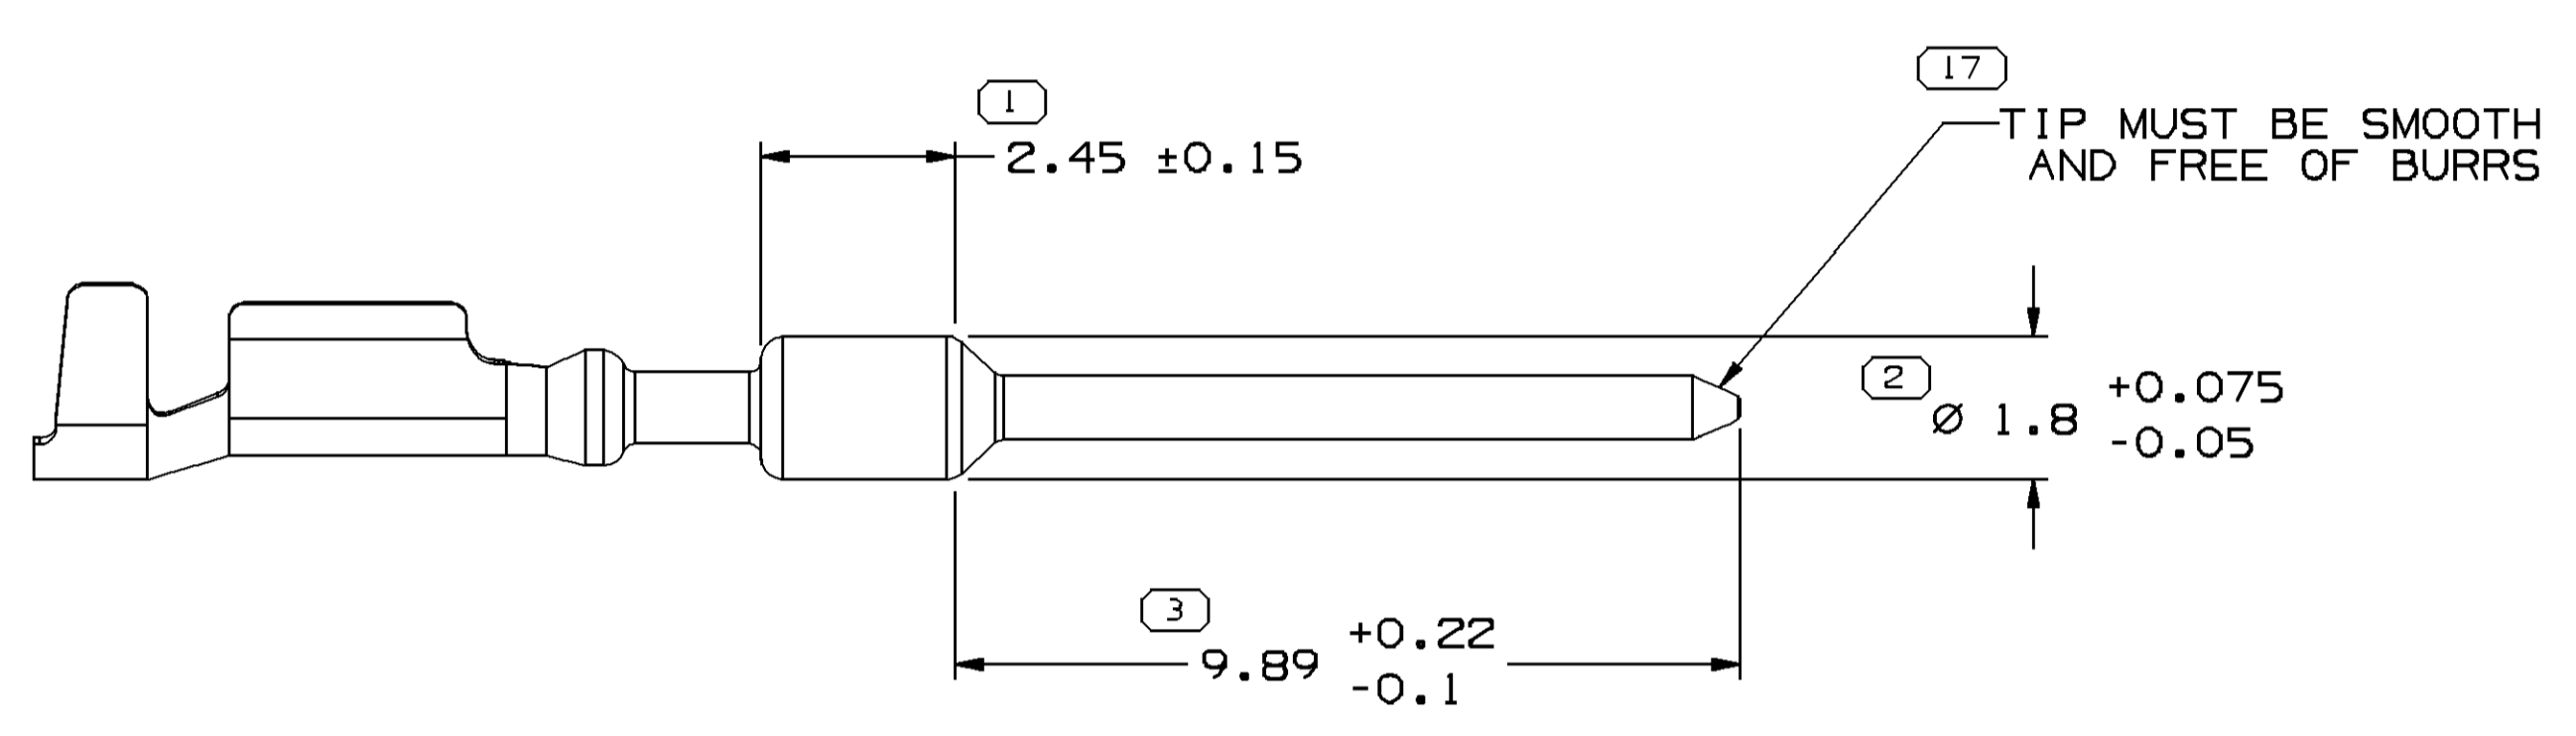


SYMBOL DEFINITION		TOTAL NO OF INSPECTIONS REQUIRED	MISSING SYMBOLS
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.		19	NO MISSING SYMBOL NUMBER
		17	LAST NO. USED

DWG STATUS				REVISION HISTORY		AUTH	DR	AP/VD
DATE	STG	REV	N/P	CHG	ZONE			
130004	R	01	-	-		ALL PARTS - RELEASED	260152	ESH/JVM/BMD
03JA05	R	02	-	-		ALL PARTS - MAT'L SPEC WAS MX-23178	262724	ADK/ADK/BD M
24FE05	R	03	-	-		ALL PARTS - REVISED TIP, ADDED TIP NOTE, REVISED CRIMP AND CABLE SPEC TO INCLUDE GAGE NOTE & B ₁ +0.3 WAS B ₁ +0.35-0.3, 9.89 +0.22/-0.1 WAS 9.89 +0.13/-0.1, 9.34 +0.25/-0.1 WAS 9.34 +0.16/-0.1	264727	CJP/CJP/BMD
16MRO5	R	04	-	-		ALL PARTS - REVISED PROCESS SENSITIVE DIMENSION	266084	CCV/JAA/BMD
01FE06	R	05	-	-		ALL PARTS - REVISED GAGE DIA NOTE	276965	END/END/RB

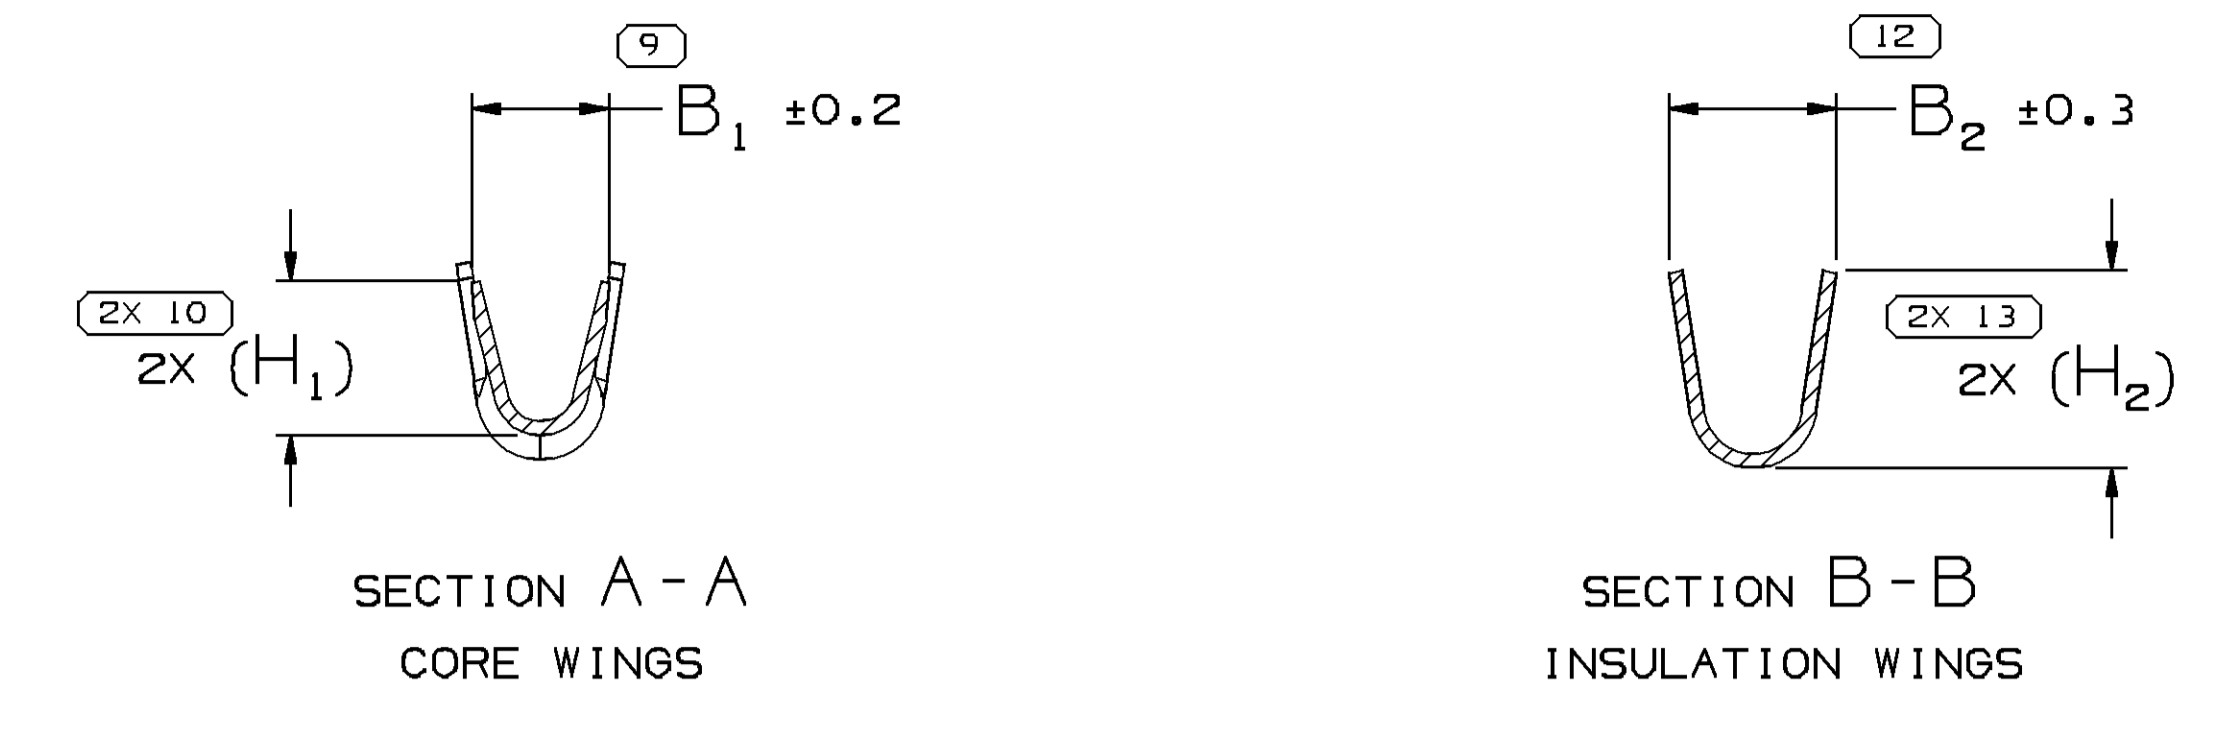

- NOTES
- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
 - MAXIMUM CURRENT CAPACITY IS 5 AMPS.
 - REFERENCE MATING COMPONENTS OR EQUIVALENT: CONNECTOR ASSEMBLY 1548949B FEMALE TERMINAL 15394147 & 15401440
 - DIMENSIONAL TOLERANCE TO BE HELD 5MM FROM THE TIP, THE REMAINING PIN TOLERANCE IS ±0.05.

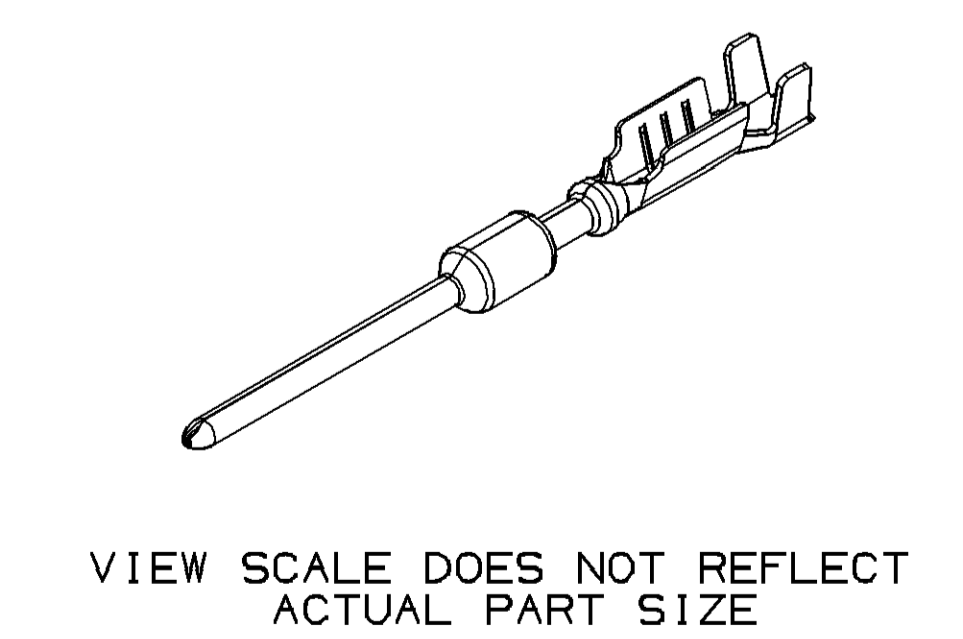

PART NO	REV	N/P	MAT'L SIZE	MAT'L SPEC	SIZE (MM²)	ID	DIA	TYPE	B ₁ ±0.2	B ₂ ±0.3	(H ₁)	(H ₂)
15489500	02	AB	0.1778 X 27.21	M5482C09	0.5-0.8	19	1.9-1.64	102	2.08	2.5	2.4	2.5
15489501	02	AB	0.1778 X 27.21	M5482C09	0.35	22	1.63-1.47	101	1.65	2.1	1.9	2.4

(15) PROCESS SENSITIVE DIMENSION	REFERENCE
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED	
DIMENSIONAL RANGE (MM)	CHART D
FROM 0 TO 12	>12
TOLERANCE UNLESS OTHERWISE SPECIFIED	
+0.1	+0.2
ANGULAR TOLERANCE 22°	

THIRD ANGLE PROJECTION	DO NOT SCALE	USE MATH DATA
------------------------	--------------	---------------

DELPHI
DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

DR	DATE
APV01 E. SALINAS	200C04
APV02 J. VILLAMIL	270C04
APV03 BARRY DAGGETT	290C04
APV04	

UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE M SI UNITS DIMENSIONING AND TOLERANCE HANDLING (Y14.5M) ALL DIMENSIONS AND RELATED DATUMS APPLY UNLESS OTHERWISE NOTED. DIMENSIONS NOT ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES, SEPARATE POSITION CALLOUTS MAY BE SHOWN SEPARATELY, REGARDLESS OF DATUM REFERENCE. ALL DIMENSIONS ARE IN MILLIMETERS.

UNLESS OTHERWISE SPECIFIED SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

SEE CHART

DRAWING NAME: TAXI TERM M MICRO 64

DRAWING NUMBER: 15489499

SIZE	SCALE	FRAME NO	SHEET NO	REV	N/P
A0	10:1	1	1	1	R 05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [APTIV](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [629515004020001](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#)
[F258300-B](#) [F358300-B](#) [F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#)
[968782-1](#) [GT17SA-8DS-HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#)
[12052225-L](#) [12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#)
[12047946-B](#) [12047957](#) [12047957-L](#) [12059473](#) [12066261](#)