Component-to-wire connectors

2 way female housings for 2.8 mm terminals

Features

- High density, reduced size housings
- Hinge secondary lock for terminal position assurance (T.P.A.)
- 2 way housing compatible with ISO standard for loudspeaker
- Several colour codings available



Performance characteristics

•	Temperature range:
	from -40°C to +125°C

- Contact retention force: > 120 N
- Contact insertion force: < 7 N
- Connector mating force: < 30 N

Construction

• Housing material: PBT

Tooling

 Terminal removal tool: 	210S045
 Flap opening: 	210S043


Connector compatibility

- Usable terminals:
- Sicma-2 2.8 mm female terminals
- Sicma-3 2.8 mm female terminals


Part Numbers	No. of position	Terminal size	Colour
211 PC023S0017	2	2.8 mm	Black
211 PC023S6017	2	2.8 mm	Blue
211 PC023S8017	2	2.8 mm	Grey
211 PC023S9017	2	2.8 mm	Crystal



2 way female housings for 2.8 mm terminals

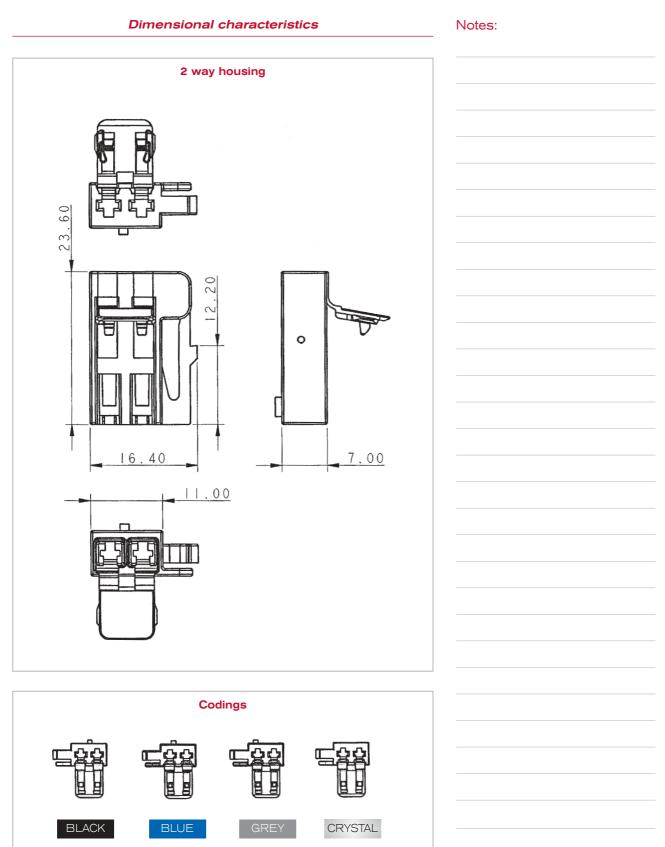

Product Detail Page

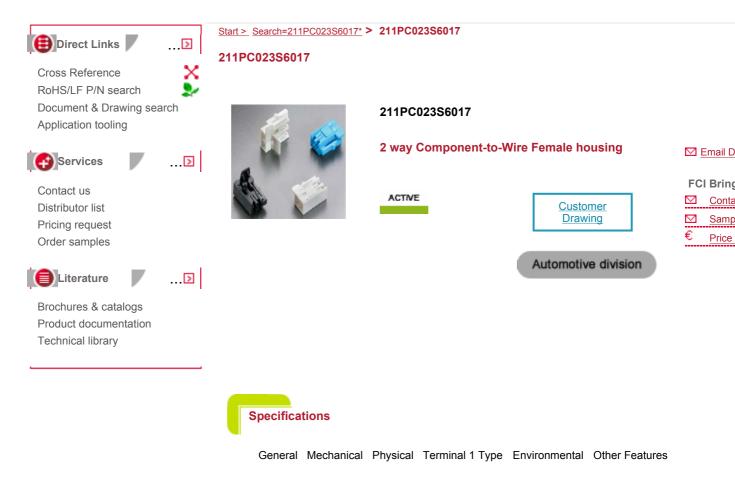

General

Application	Wire to Device
Ways	2
Coding version	Blue
Product Type	Housing
Coding	Yes
Family	Wire to Device
Features	High Density, Reduce Size Ho Compatible ISO Standard for L

Product Detail Page

	Hinge Secondary Lock for Terr (T.P.A.)			
Hybrid	No			
Main Terminal family	Sicma			
Main Terminal size	2.8 mm			
Sealed	No			
Terminal Size	2.8			
Mechanical				
Connector mating force	< 30N			
Physical				
Color	Blue			
Material	PBT			
Temperature (Range)	-40°C to+125°C			
Terminal 1 Type				
Terminal type 1	Sicma Female 2.8 mm Termina			
Ways for Terminal Type 1	2			
Contact insertion force for Terminal Type 1	< 7N			
Retention force (Contact) for Terminal Type 1	> 120N			
Environmental				
IMDS	Yes			
Other Features				
Туре	Female			
Disclaimer	For more Information, please of Displayed data is for information The supply of some products in customers.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Connectors category:

Click to view products by APTIV manufacturer:

Other Similar products are found below :

003-018-000 60403001 60993906-B 629515004020001 M902-2131 M902-2161 72.330.1035.1 73.353.4028.0 F119300-B F166900 F258300-B F358300-B F407400 F444110 F487000 F509500B-B 827153-1 8N1515-32-24P 9-1326729-8 925474-1 928905-1 964562-4 968782-1 GT17SA-8DS-HU 98891-1012 98947-1016 12004475-L 12010290 12010309-B 12015454 12020219-B 12020308 12041318-B 12052225-L 12052466 12059125 12064869 12004327-B 12010503-B 12015308 12015384 12015909 1-21030-1 12041254 12041318 12047946-B 12047957 12047957-L 12059473 12066261