


DCS-1

9.5 mm female and male terminals

Features

- DCS-1 technology
- 12.0 mm pitch for unsealed applications
- 12.5 mm pitch for sealed application with single wire seal
- Auxiliary steel spring in CrNi
- High current carrying capacity (up to 75 A at +23°C)
- Protected contact springs
- Compatible with single wire sealing
- Silver-plated versions possible

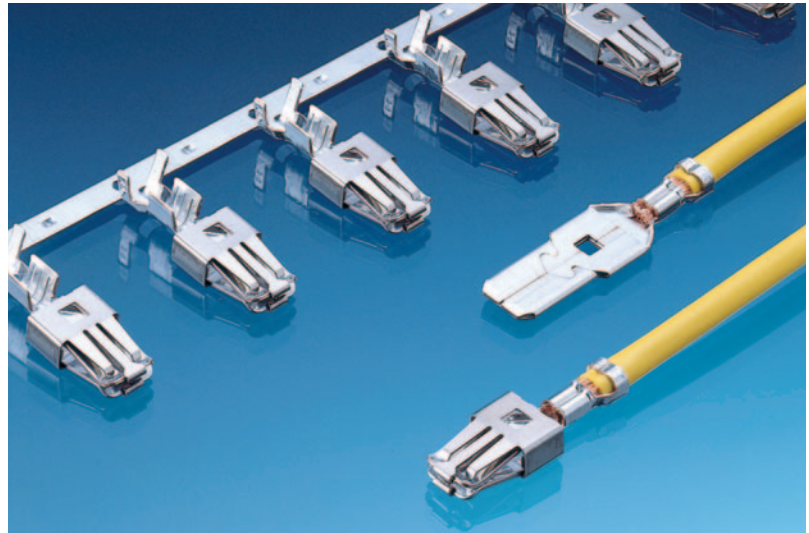

Performance characteristics*

- Contact resistance: < 3 mΩ
- Contact mating force: < 21 N
- Contact unmating force: < 15 N
- Current carrying capacity with 10 mm² wire:

at 23°C up to approx.:	75 A
at 85°C up to approx.:	50 A
at 100°C up to approx.:	40 A

* Mated with 9.5 x 1.2 mm DCS-1 male terminal (Sn)

Packing

- No. of terminals per reel: Consult us
- No. of reels per packing: Consult us

Tooling

- Manual crimping tool: Consult us
- Mini applicator: Consult us

Part Numbers	Type	Wire size range (in mm ²)		Insulation Ø (in mm) Max.	Material	Plating
		Min.	Max.			
6 007 02 51	Female	2.50	4.00	3.70 (FLRY wire)	CuCrSiTi/CrNi	Sn
6 007 02 61	Female	> 4.00	6.00	4.30 (FLRY wire)	CuCrSiTi/CrNi	Sn
6 007 02 71	Female	> 6.00	10.00	6.40 (FLRY wire)	CuCrSiTi/CrNi	Sn
6 017 02 51	Male	2.50	4.00	3.70 (FLRY wire)	CuSn	Sn
6 017 02 61	Male	> 4.00	6.00	4.30 (FLRY wire)	CuSn	Sn
6 017 02 71	Male	> 6.00	10.00	6.40 (FLRY wire)	CuSn	Sn

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [APTIV](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)