

PBE-1702

COM Express Type 6 Evaluation Board in ATX Form Factor



Features

- **COM Express Type 6 Evaluation Board**
- Dual Gigabit Ethernet Ports
- Support DVI, Dual Channels LVDS, DisplayPort and Analog RGB
- **Operating Temp.: -20 ~ 70°C**


I/O

IO Chipset	Fintek F71869ED
Serial Port	2 x COM ports, 2 x Ultra COM ports (depending on CPU module)
Parallel Port	1 x SPP/EPP/ECP mode
USB Port	2 x USB 2.0 ports 4 x USB 3.0 ports (depending on CPU module)
KB/MS	Standard PS/2 keyboard and mouse
Digital IO	8-bit Digital Input/Output
Expansion Bus	1 x PCIe x16 slot 2 x PCIe x1 slots 1 x PCIe x4 slot 2 x Mini-card sockets (depending on CPU module)
Storage	4 x Serial ATA connectors (depending on CPU module)
Ethernet Chipset	1 x Intel® 82583V PCIe GbE controller 1 x GbE by Qseven™ CPU module
Audio Interface	ALC888 CODEC, Line-in/out, Mic-in, 7.1 + 2 Channel
Display	Analog RGB connector / DisplayPort connector / DVI connector
Graphics Interface	1 x LVDS Dual Channels connector


Mechanical & Environmental

Power Requirement	ATX connector
Power Consumption	2.12A@+12V with i7-2610UE (Typical)
Operating Temp.	-20°C~70°C (-4°F~158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimension (L x W)	305 x 243 mm (12" x 9.6")

Dimensions

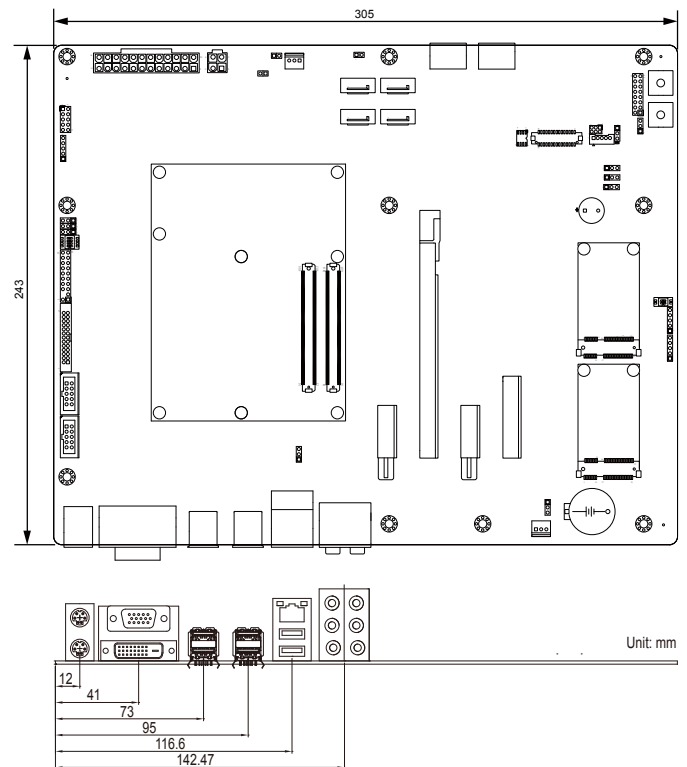

Block Diagram

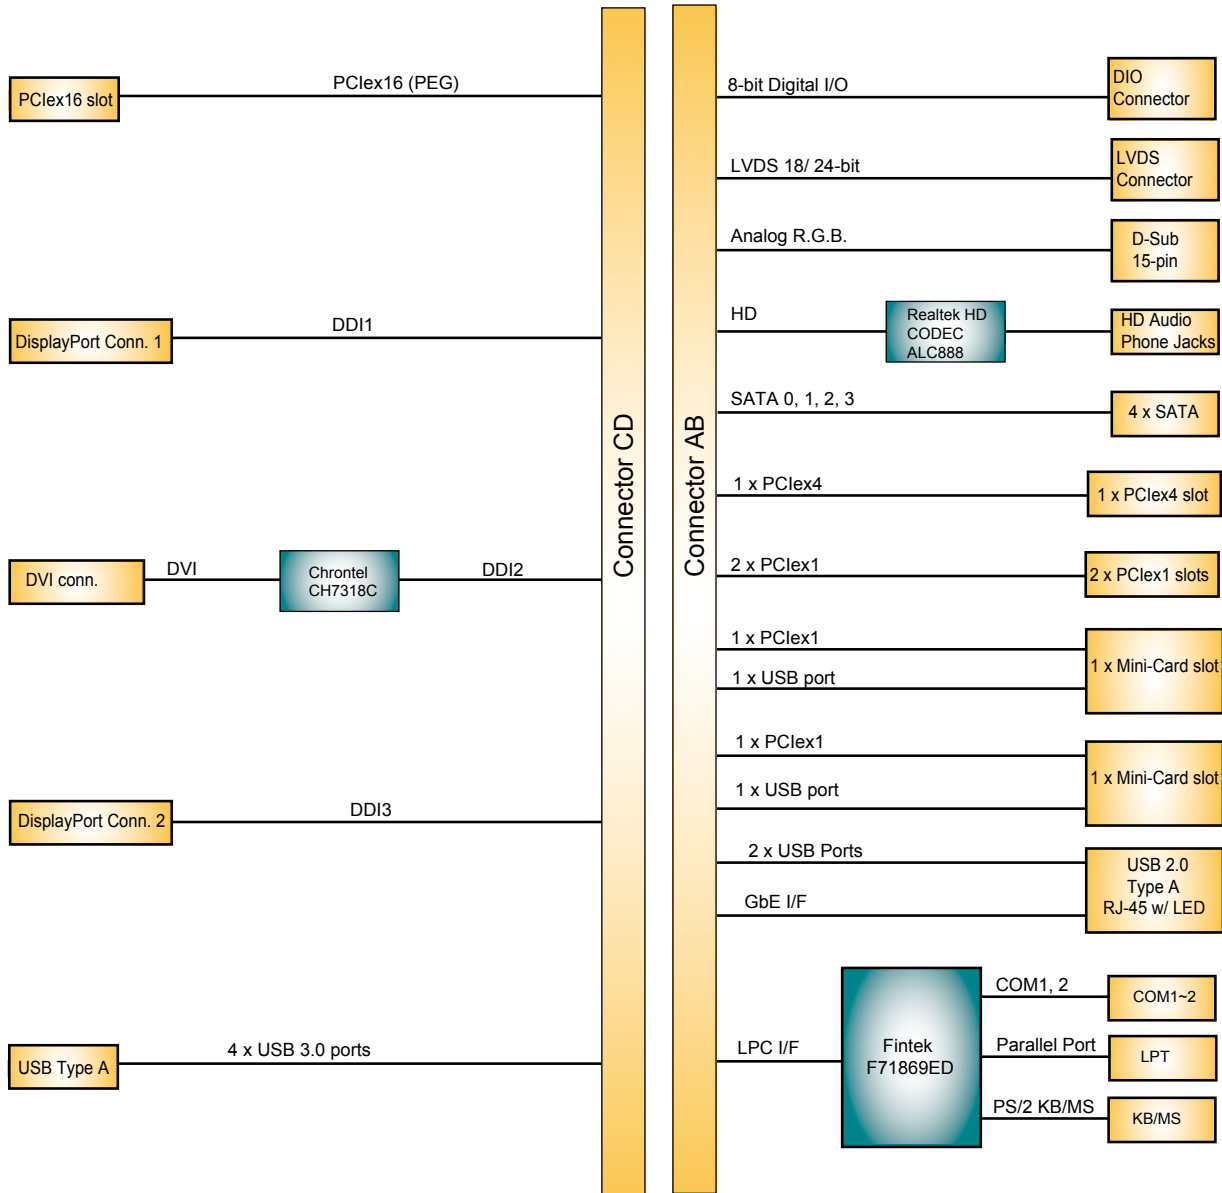

Ordering Information

PBE-1702 COM Express evaluation board in ATX form factor

Optional Accessories

CBK-04-1702-00

Cable kit

- 1 x USB cable
- 2 x COM port cables
- 1 x SATA cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Computer Cables](#) category:

Click to view products by [Arbor Technology](#) manufacturer:

Other Similar products are found below :

[68809-0004](#) [8F36-AAA105-1.00](#) [IB63](#) [CB-716EB-RS](#) [CB-716P8P9-RS](#) [CBK-11-290K-00](#) [ACL-10550](#) [ACL-10568-2](#) [ACL-10568-5](#)
[427522400-3](#) [32102-021500-200-RS](#) [426091300-3](#) [48000023](#) [10114976-P015002LF](#) [10111838-S444ALF](#) [88761-6101](#) [NT631C-CN321-EU](#)
[ACL-10568NF-1](#) [MIKROE-2092](#) [PCL-101100R-2E](#) [1700009405](#) [PS/2 Cable](#) [NT31C-CN323-EU](#) [PCL-10168H-1E](#) [68801-1905](#) [111068-](#)
[1015](#) [100436-1107](#) [68801-0630](#) [68801-3612](#) [68801-3618](#) [205058-1002](#) [PS2NK](#) [SATA cable](#) [96021-0000-00-0](#) [FAK-SMZSMZ 5M](#) [FAK-](#)
[SMZSMZ-3M](#) [ACC-500-200-R](#) [iW-C40-PCIe08-C1](#) [1700001531](#) [96048-0000-00-0](#) [96054-0000-00-0](#) [SATA III cable 30cm, down/straight](#)
[cab-Pico-ITX-LVDS](#) [PCL-101100SB-2E](#) [AXXSTCBLQAT](#) [NT31C-KBA05](#) [PCL-101100M-2E](#) [A2U4PSWCXCXK1](#) [2 port SATA to 5](#)
[pin,L=200mm](#) [P782-006-DH](#)