

EmCORE-a55E1

AMD G-series G-T56N / G-T40N 3.5" Compact Board



Features

- Soldered Onboard AMD Fusion G-Series Processor
- Dual Gigabit Ethernet Ports
- HDMI, Analog RGB and Dual Channels 24-bit LVDS
- Dual Independent Displays
- Integrate SIM Socket to Support Mobile Telecommunication

System

CPU	Soldered onboard AMD G-series G-T56N 1.65GHz, or G-T40N 1.0GHz processor
Memory	1 x 204-pin DDR3 SO-DIMM socket, supporting 800/1066/1333MHz SDRAM up to 4GB
Chipset	AMD FCH A55E
BIOS	AMI UEFI BIOS
Watchdog Timer	1~255 levels reset

I/O

I/O Chip	Fintek F81866
Serial Port	6 x COM ports (5 x RS-232, 1 x RS-232/422/485 selectable)
USB Port	6 x USB 2.0 ports
KB/MS	1 x 6-pin wafer connector for keyboard and mouse (PS/2 interface via Y-cable)
Digital I/O	8-bit programmable Digital Input/Output, shared with LPT port connector
Expansion Bus	1 x Mini-card socket 1 x SIM socket
Storage	2 x Serial ATA ports with 600MB/s HDD transfer rate 1 x CFast socket
Ethernet Chipset	2 x Intel® 82583V PCIe GbE controllers
Audio Interface	Realtek ALC662 5.1 Channel HD Audio Codec, Mic-in/ Line-in/ Line-out


Display

Graphics Chipset	Integrated AMD Radeon HD 6320 w/ G-T56N, HD 6250 w/ G-T40N
Graphics Interface	Analog RGB supports resolution up to 2560 x 1600 @60Hz LCD: Dual Channels support 18/24-bit LVDS, resolution up to 1920 x 1600 Support HDMI 1.3a


Mechanical & Environmental

Power Connector	12V DC only with Aux. ATX power connector
Power Consumption	1.75A@+12V with G-T56N (Typical) 1.2A@+12V with G-T40N (Typical)
Operating Temp.	0 ~ 70°C (32 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimensions (L x W)	146 x 102 mm (5.75" x 4.00")

Dimensions

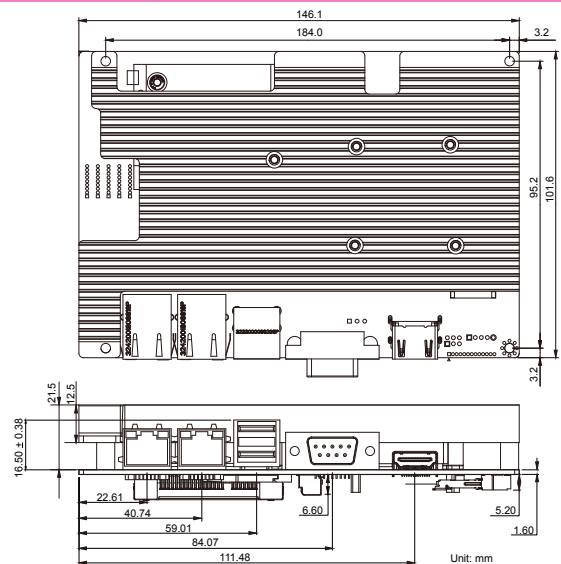

Block Diagram

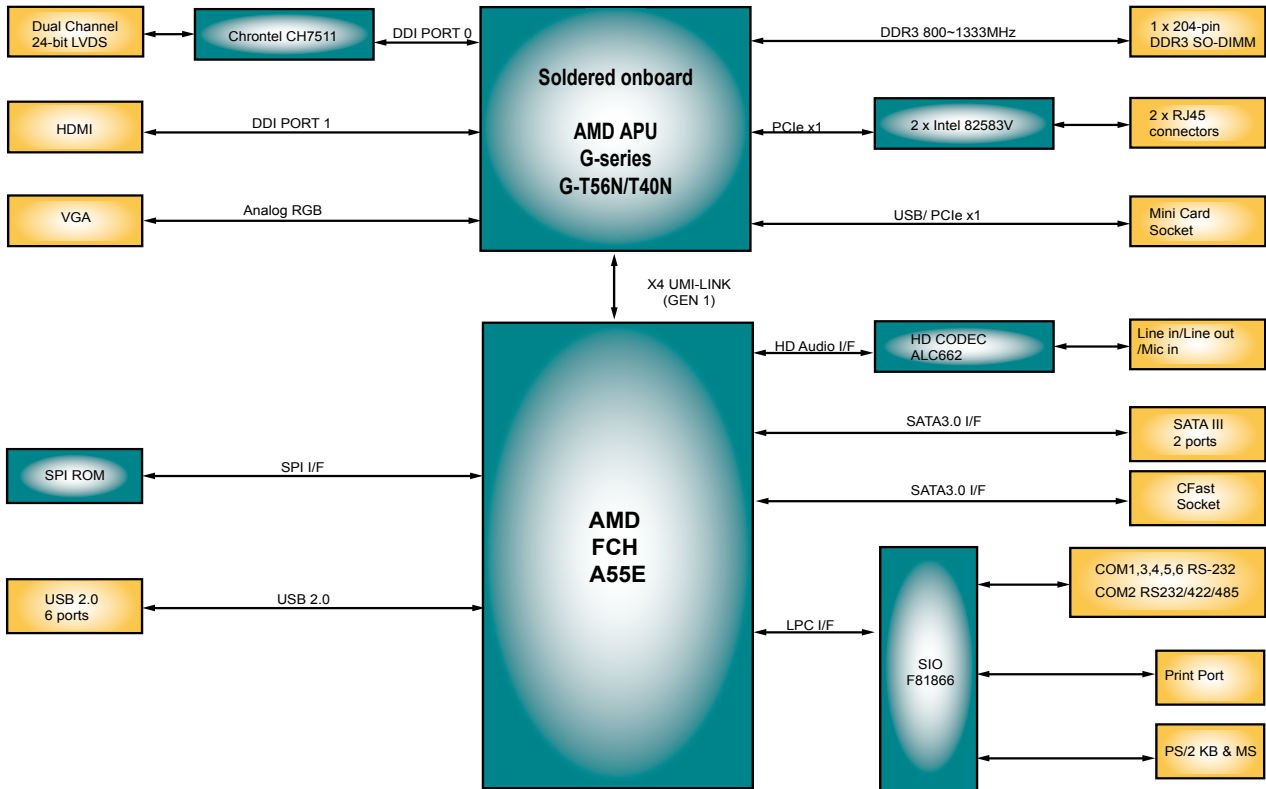

Ordering Information

EmCORE-a55E1-T56N AMD G-T56N 3.5" Compact Board

EmCORE-a55E1-T40N AMD G-T40N 3.5" Compact Board

Optional Accessories

- CBK-14-55E1-00**
- Cable kit
- 5 x COM port cables
 - 2 x USB cables
 - 2 x SATA cables
 - 1 x SATA Power cable
 - 1 x LPT cable
 - 1 x audio cable
 - 1 x KB/MS cable
 - 1 x VGA cable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Computer Cables](#) category:

Click to view products by [Arbor Technology](#) manufacturer:

Other Similar products are found below :

[68809-0004](#) [8F36-AAA105-1.00](#) [IB63](#) [CB-716EB-RS](#) [CB-716P8P9-RS](#) [CBK-11-290K-00](#) [ACL-10550](#) [ACL-10568-2](#) [ACL-10568-5](#)
[427522400-3](#) [32102-021500-200-RS](#) [426091300-3](#) [48000023](#) [10114976-P015002LF](#) [10111838-S444ALF](#) [88761-6101](#) [NT631C-CN321-EU](#)
[ACL-10568NF-1](#) [MIKROE-2092](#) [PCL-101100R-2E](#) [1700009405](#) [PS/2 Cable](#) [NT31C-CN323-EU](#) [PCL-10168H-1E](#) [68801-1905](#) [111068-](#)
[1015](#) [100436-1107](#) [68801-0630](#) [68801-3612](#) [68801-3618](#) [205058-1002](#) [PS2NK](#) [SATA cable](#) [96021-0000-00-0](#) [FAK-SMZSMZ 5M](#) [FAK-](#)
[SMZSMZ-3M](#) [ACC-500-200-R](#) [iW-C40-PCIe08-C1](#) [1700001531](#) [96048-0000-00-0](#) [96054-0000-00-0](#) [SATA III cable 30cm, down/straight](#)
[cab-Pico-ITX-LVDS](#) [PCL-101100SB-2E](#) [AXXSTCBLQAT](#) [NT31C-KBA05](#) [PCL-101100M-2E](#) [A2U4PSWCXCXK1](#) [2 port SATA to 5](#)
[pin,L=200mm](#) [P782-006-DH](#)