

EmETXe-i2905

Intel® Atom™ N455/ D525 COM Express Compact Type 2 CPU Module



Features

- **Fanless Design**
- Soldered Onboard Intel® Atom™ N455/D525 Processor
- Integrated Gigabit Ethernet
- Support Both LVDS and Analog RGB Output
- Dual Independent Displays
- **Extended Operating Temp.: -20 ~ 70°C**

System

CPU	Soldered onboard Intel® Atom™ N455 1.6GHz or D525 1.8GHz processor
Memory	Soldered onboard 2GB DDR3 SDRAM
Chipset	Intel® ICH8M
BIOS	AMI UEFI BIOS
Storage	1 x Ultra ATA, supporting 2 IDE devices 3 x Serial ATA ports with 300MB/s HDD transfer rate

I/O

USB Port	8 x USB 2.0 ports
Digital I/O	8-bit programmable Digital Input/Output 5 x PCIe x1 lanes
Expansion Bus	4 x PCI masters LPC (Low Pin Count) interface
Ethernet Chipset	1 x Intel® 82574L PCIe GbE controller
Audio	HD Audio Link


Display

Graphics Chipset	Integrated Intel® Graphics Media Accelerator 3150 Analog RGB supports resolution up to: - 1400 x 1050 @ 60Hz (N455) - 2048 x 1536 @ 60Hz (D525)
Graphics Interface	Single Channel 18/24-bit LVDS supports resolution up to: - 1280 x 800 or 1366 x 768 (N455) - 1366 x 768 (D525) Support Dual Independent Displays


Mechanical & Environmental

Power Requirement	12V, 5VSB
Power Consumption	1.05A/12V with N455 (Typical) 1.25A/12V with D525 (Typical)
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimension (L x W)	95 x 95 mm (3.7" x 3.7")

Dimensions

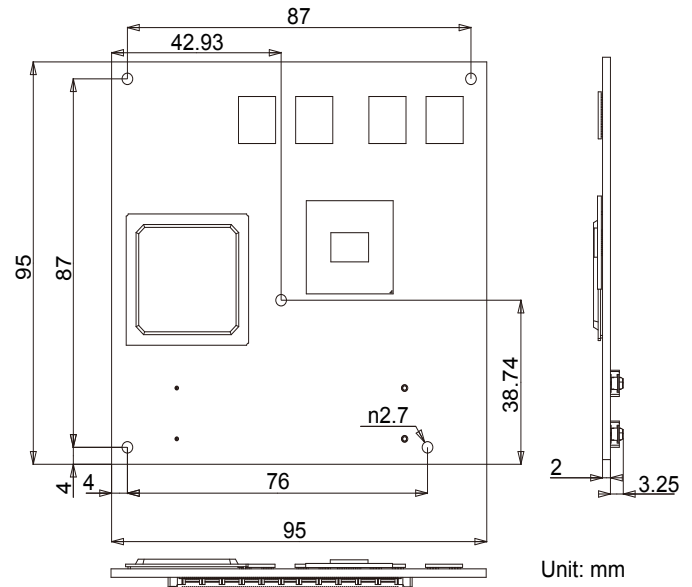

Block Diagram

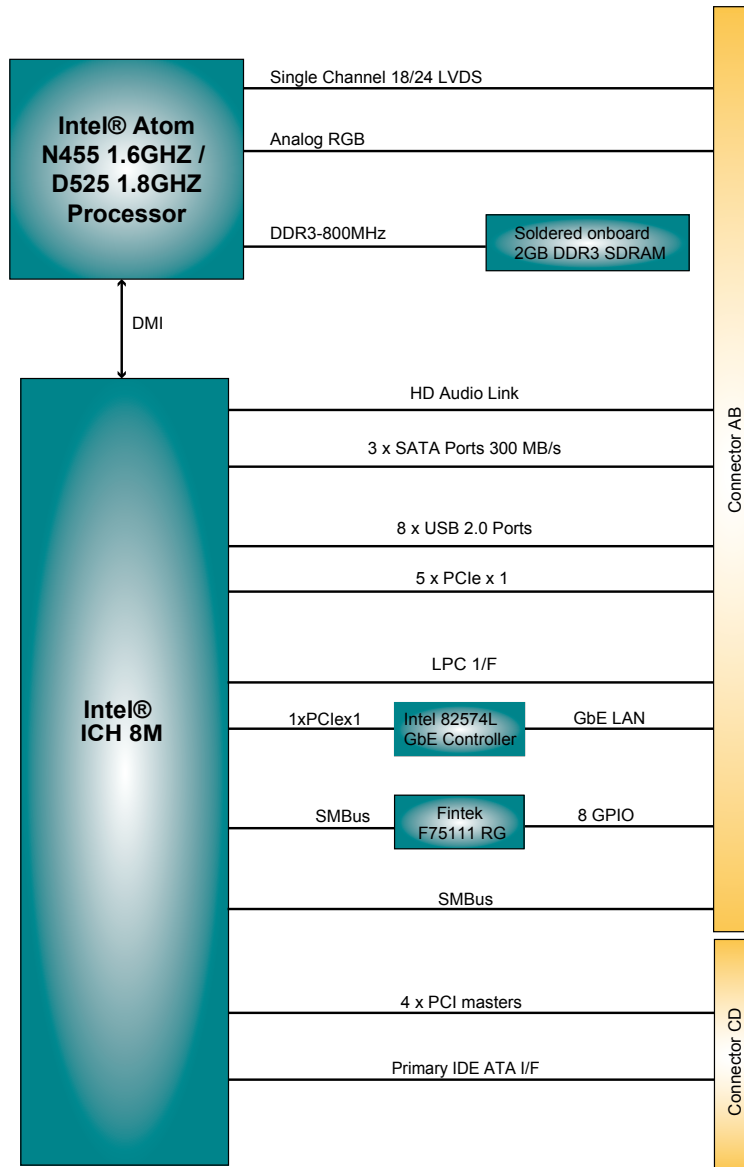

Ordering Information

EmETXe-i2905-N4 Intel® Atom™ N455 COM Express Compact CPU module

EmETXe-i2905-D5 Intel® Atom™ D525 COM Express Compact CPU module

Optional Accessories

HS-2905-F1-KIT Heat spreader (95 x 95 x 11mm)

HS-0000-W4 Universal evaluation heatsink kit w/ thermal pad (dimension: 125x95x22mm, only used on a flat type heatspreader)

PBE-1700-W R1.3 COM Express Type 2 evaluation board in ATX form factor w/ W83627 Super IO

Page 64

CBK-04-1700-00 Cable kit

- 1 x SATA cable
- 1 x COM port cable
- 1 x FDD cable
- 1 x IDE cable

CPF-0000-C1 FAN, 4500RPM, 60x60x20mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [CPU & Chip Coolers](#) category:

Click to view products by [Arbor Technology](#) manufacturer:

Other Similar products are found below :

[HS-56M0-C1](#) [1960058073N001](#) [19FFD124010HB2A7-000001-RS](#) [BXTS15A](#) [FHS-A9025S19](#) [UPS-APL01-COOLER-A01](#) [EP-FNUPACTCLRDC](#) [5078C111200E](#) [AP3505HX-J70-LF](#) [SK 570 25 SA](#) [BXSTS200P 915972](#) [SK 570 10 SA](#) [SK 571 25 SA](#) [SK 571 50 SA](#) [SK 578 15 SA](#) [RAPID-100-2](#) [RAPID-135-6](#) [RAPID-L120](#) [RAPID-L240](#) [FHS-A9025S20](#) [1960048820N001](#) [BXSTS200PNRW 915971](#) [1750000282](#) [AmITX-BT TM-FAN-ETT](#) [1960049408N001](#) [CF-775A-RS](#) [1960053207N001](#) [1960047670N001](#) [1960047669N001](#) [1750001660](#) [conga-TC170/CSP-B](#) [MC30101V1-Q020-S99-PK](#) [664-P4505MX-G90-LF](#) [FEX353521T710M2](#) [FHL313117T710T](#) [EP-FNDCACTCLUPS](#) [36099-0000-99-1](#) [36099-0000-99-0](#) [LA 17/150 24V](#) [LA 27 K 150 ME 24 V](#) [LA 7/100 12V](#) [LA 7/100 24V](#) [LA 7/150 12V](#) [LA 7/150 24V](#) [LA 9/200 24V](#)