

ELIT-1000

Digital Signage Player Powered by Intel® Atom™ D2550 Platform



Features

- Fanless Design
- Ultra Low Profile Enclosure
- RS-485 Auto-flow Function Supported
- 2 x Independent Line-out w/ 500mW Pre-amplified
- Support Dual DVI
- Support Outside Accessible SD Slot
- Support Optional WiFi Connection
- Rugged Design for Shock/Vibration Protection
- Support RTC Wakeup

System

CPU	Soldered onboard Intel® Atom™ D2550 1.86GHz processor
Memory	1 x 204-pin DDR3 SO-DIMM socket, supporting 800/1066MHz SDRAM up to 4GB
Chipset	Intel® NM10 PCH
Graphics	Integrated Intel® GMA 3650
ATA	1 x Serial ATA port with 300MB/s HDD transfer rate
LAN Chipset	2 x Realtek 8111 GbE controllers
Watchdog Timer	1~255 levels reset

I/O

	2 x RJ-45 ports
Serial Port	Support COM1 RS-232 Support COM2 RS-232/422/485 selectable; RS-485 supports auto-flow control
USB Port	4 x USB 2.0 ports
LAN	2 x RJ-45 ports for GbE
Video Port	1 x DVI-I female connector for Digital Video output 1 x DVI-D female connector for Digital Video output
Audio	Mic-in/ 2 x Line-out (500mW pre-amplified)
Expansion Bus	1 x Mini-card slot for optional WiFi module

Environmental

Operating Temp.	-25 ~ 55°C (-13 ~ 131°F), ambient w/ air flow
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 55°C (non-condensing)
Vibration	3 Grms/5~500Hz/random operation
Shock	Operating 50G (11ms), Non-operating 80G with SSD

Qualification

Certification	CE, FCC Class A
----------------------	-----------------

Power Requirement

Power Input	DC 19V input by 2.5mm power jack
Power Consumption	Max. 25W
Power Management	RTC wakeup timer selectable

Storage

Type	1 x 2.5" drive bay for SSD 1 x SD socket, can be outside accessible
-------------	--

Mechanical

Construction	Aluminum alloy
Mounting	Support VESA-mount/wall-mounting
Weight (Net / Gross)	0.93Kg (2.05lb) / 1.1Kg (2.42lb)
Dimensions (W x D x H)	System = 188 x 149.5 x 30mm (7.4" x 5.88" x 1.18") Packing = 304 x 294 x 355mm (11.97" x 11.57" x 13.98")

OS Support

Windows XP Embedded / Windows XP Professional / Windows Embedded 7 Professional / Windows Embedded 7 Standard


Ordering Information

ELIT-1000-16S2G	Digital Signage Player by Intel® Atom™ D2550, w/ 16GB SSD and 2GB memory
ELIT-1000	Digital Signage Player by Intel® Atom™ D2550, w/o storage device and memory



» Fanless Design

Dimensions

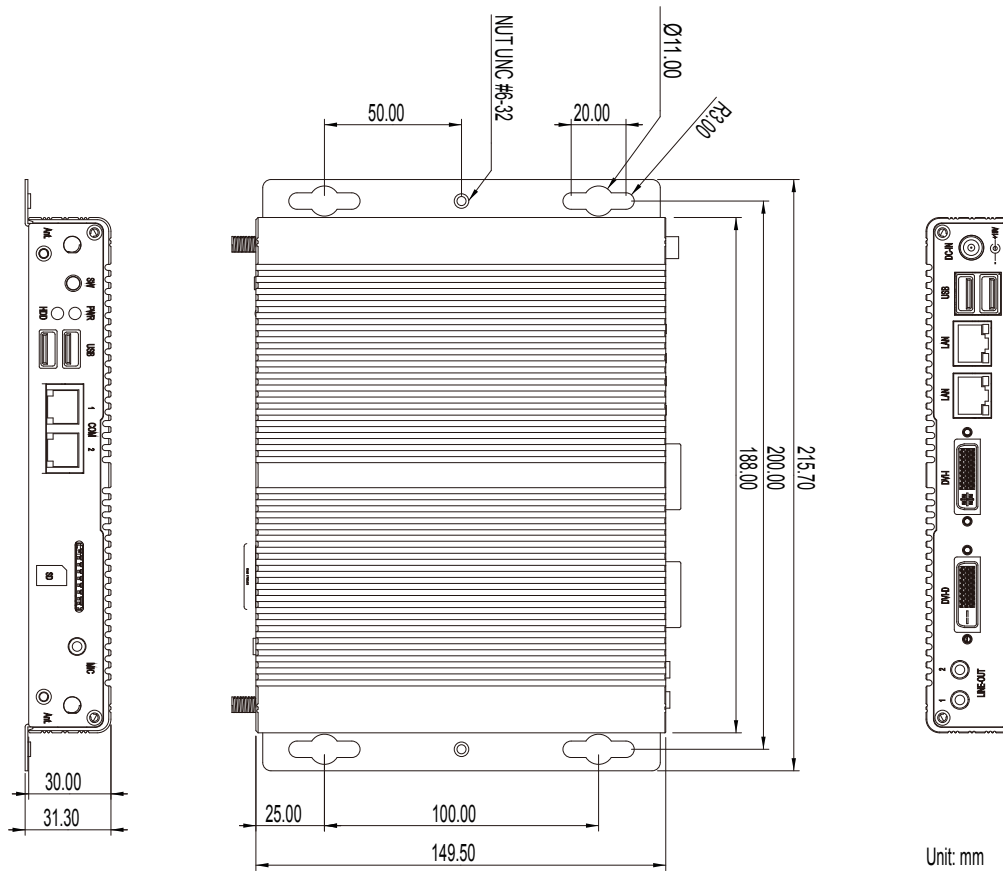

Optional Accessories

PAC-B065W-2 19V/3.4A 65W AC/DC adapter kit



CBL-3100-COM 1 x COM port converter cable



VMK-1000 VESA mount kit for ELIT series



Optional Configuration (CTOS* Kit)

SSD-25032 Memoright 2.5" 32GB SATAII SSD kit



WIFI-IN1300 Intel® Centrin® Advanced-N 6205 WiFi module w/ 20cm internal wiring



ANT-D11 1 x WiFi Dual-band 2.4G/5G antenna



2GB SO-DIMM DDR3-1333 2GB SDRAM



4GB SO-DIMM DDR3-1333 4GB SDRAM

*CTOS means Configure-to-Order Service.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Arbor Technology](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [EM3000-3845-8-128-WL-U-1](#) [TANK-870AI-i5/8G/2A-R10](#)
[PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-1Q10A1](#) [UPS-EDAI-X70864-](#)
[U01-DC01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-](#)
[T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-74000A](#) [AMAX-5580-54000A](#) [AMAX-5580-C3000A](#) [APAX-5580-474AE](#) [ARK-](#)
[6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#)
[UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [AMI220AF-4L-7700](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#)
[MVS900-511-FL](#) [AMS200](#) [CSB200-898-IT](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)