

Em104-a5362

AMD® Geode™ LX800 PC/104 CPU Module



Features

- **Fanless Design**
- Low Power PC/104 CPU Module
- Soldered Onboard AMD® Geode™ LX800 Processor
- 18/24-bit TTL, and Analog RGB
- Multi-expansion (4 x USB, 2 x Serial Ports, 1 x PATA, 1 x FDD, PC/104, 1 x CF Socket)
- **Extended Operating Temp.: -20 ~ 70°C**

System

CPU	Soldered onboard AMD® Geode™ LX800 500MHz processor
Memory	1 x 200-pin DDR SO-DIMM Socket supporting 200MHz SDRAM up to 1GB
Chipset	AMD® Geode™ CS5536
BIOS	Phoenix-Award PnP Flash BIOS
	1 x Ultra ATA, support 2 IDE devices
Storage	1 x Floppy disk drive
	1 x CompactFlash Type II Socket

Watchdog Timer 1~255 levels reset

I/O

I/O Chip	Winbond W83627HG
Serial Port	2 x COM ports (1 x RS-232, 1 x RS-232/422/485 selectable)
Parallel Port	SPP/EPP/ECP mode selectable
USB Port	4 x USB 2.0 ports
KB/MS	One 1 x 6-pin wafer connector (PS/2 interface for Keyboard and Mouse)
Expansion Bus	PC/104 interface

Ethernet

Chipset 1 x Realtek RTL8100CL PCI 10/100Base-T Ethernet controller

Display


Graphics Chipset AMD® Geode™ LX800 CPU integrated VGA controller with 2D Engine (Shared memory Max. 64MB)

Graphics Interface LCD: 18/24-bit TTL up to 1280 x 1024

Mechanical & Environmental

Power Requirement	Small 4P AT power connector
Power Consumption	1.99A/5V
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	0 ~ 90% (non-condensing)
Dimension (L x W)	96 x 90 mm (3.8" x 3.5")

Dimensions

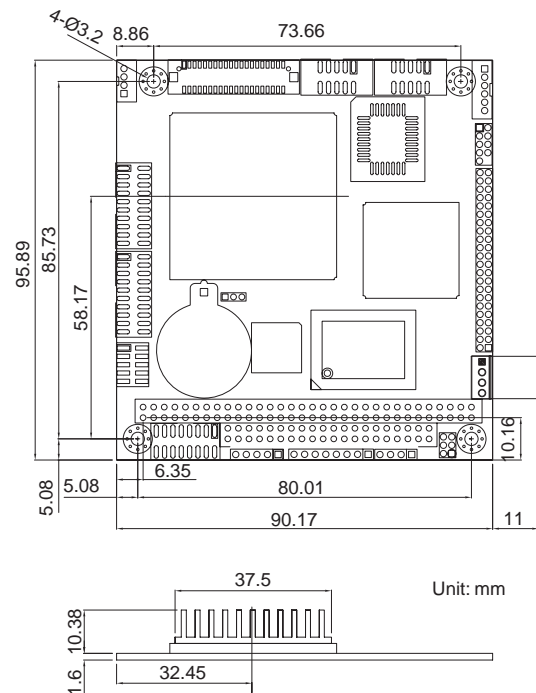

Ordering Information

Em104-a5362VL/LX800 AMD® Geode™ LX800 PC/104 CPU module

CBK-09-5362-00	Cable kit	
	1 x IDE cable	1 x KB & MS cable
	1 x USB cable	1 x VGA cable
	2 x COM port cables	1 x FDD cable
	1 x LPT cable	1 x Ethernet cable

All specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [System-On-Modules - SOM category](#):

Click to view products by [Arbor Technology manufacturer](#):

Other Similar products are found below :

[COMX-CORE-310](#) [COMX-P4040-4G-ENP2](#) [PICOIMX6U10R1GBNI4G](#) [PICOIMX6U10R1GBNI4GBW](#) [RM-F6SO1-SMC](#) [MC27561-TIGER](#) [MC27561-LION](#) [AM335XBBLK-SYSTEM](#) [MC27561-FOX](#) [CC-WMX6UL-SMPL](#) [CB-52-PUS-110-SX](#) [BD63725BEFV-EVK-002](#) [5748-PJ-4AA-RI](#) [5728-PJ-4AA-RI](#) [A00150](#) [COMX_P4080](#) [A20-SOM-EVB](#) [RK3188-SOM](#) [RK3188-SOM-4GB](#) [100-1225-1](#) [PICOIMX6Q10R1GBNI4G](#) [PER-TAICX-A10-001](#) [PER-TAIX2-A10-2280](#) [EDL-mPCIe-MA2485](#) [SOM-5897C7-U0A1E](#) [SOM-5897C7-U8A1E](#) [SOM-6896C7-U2A1E](#) [Q7M311-N4200-4GB](#) [SCM180-Dual-2G-Industrial](#) [SCM180-Quad-4G-Industrial](#) [3354-HX-X38-RC](#) [3359-GX-226-RC](#) [5728-PJ-4AA-RC](#) [6455-JE-3X5-RC](#) [Morph-IC-II](#) [ET876-X7LV](#) [IFC6301-10-P2](#) [IFC6502-00-P1](#) [IFC67A1-00-P1](#) [IFC6701-00-P1](#) [iW-G27M-SCQM-4L008G-E032G-BIG](#) [iW-G33M-SCMQ-4L002G-E008G-BII](#) [PWSE1000200B](#) [CS-DEPTHAI-04](#) [MYC-C8MMQ6-8E2D-180-C](#) [MYC-Y7Z010-4E512D-667-I](#) [MYD-C4378-4E512D-100-I](#) [MOD5213-100IR](#) [MODM7AE70-100IR](#) [A20-SOM](#)