


# EmNANO-a56M0

## AMD G-Series SoC Dual Core 210HA COM Express® Mini Type 10 CPU Module

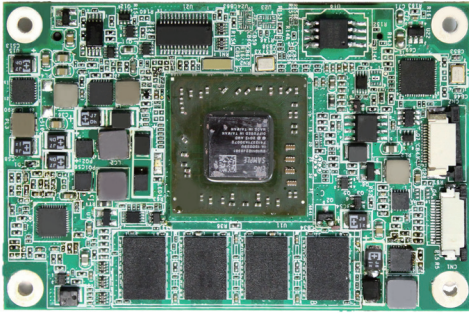

### Features

- Soldered onboard AMD G-Series SoC Dual Core 210HA processor
- Integrated Gigabit Ethernet
- Single Channel 18-bit LVDS and 1 x DDI port
- Supporting Dual Independent Displays
- **Extended Operating Temp.: -20 ~ 70°C**

### System

**CPU** AMD G-Series SoC Dual Core 210HA

**Memory** Soldered onboard 2GB DDR3L SDRAM

**BIOS** AMI® UEFI BIOS

**Watchdog Timer** 1~255 levels reset

### I/O

**USB Port** 8 x USB 2.0 ports

**Digital I/O** 8-bit programmable Digital Input/Output

**Expansion Bus** 3 x PCIe x1 Gen2 lanes  
SPI, and LPC (Low Pin Count) interface

**Storage** 2 x Serial ATA ports

**Ethernet Chipset** 1 x Realtek RTL8111E PCIe GbE controller

**AUDIO/ Interface** HD AUDIO link

### Display

**Graphics Chipset** Integrated in 210HA Kabini

**Graphics Interface** LCD: Single Channel 18-bit LVDS up to 1400 x 1050 @60Hz

1 x DDI port

### Mechanical & Environmental

**Power Requirement** +12V


**Power Consumption** 1.08A@+12V (Typical)

**Operating Temp.** -20 ~ 70°C (-4 ~ 158°F)

**Operating Humidity** 0 ~ 90% (non-condensing)


**Dimensions (L x W)** 84 x 55 mm (3.30" x 2.17")

### Dimensions

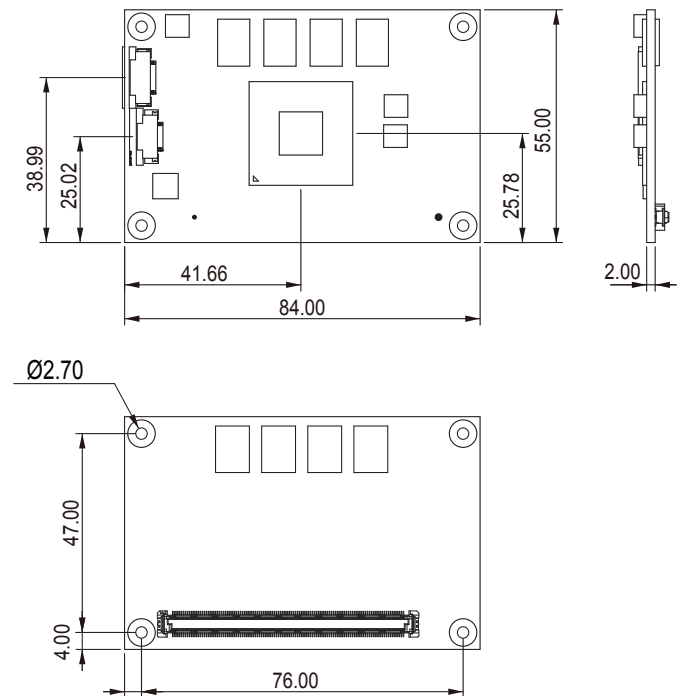

Unit: mm

# Block Diagram

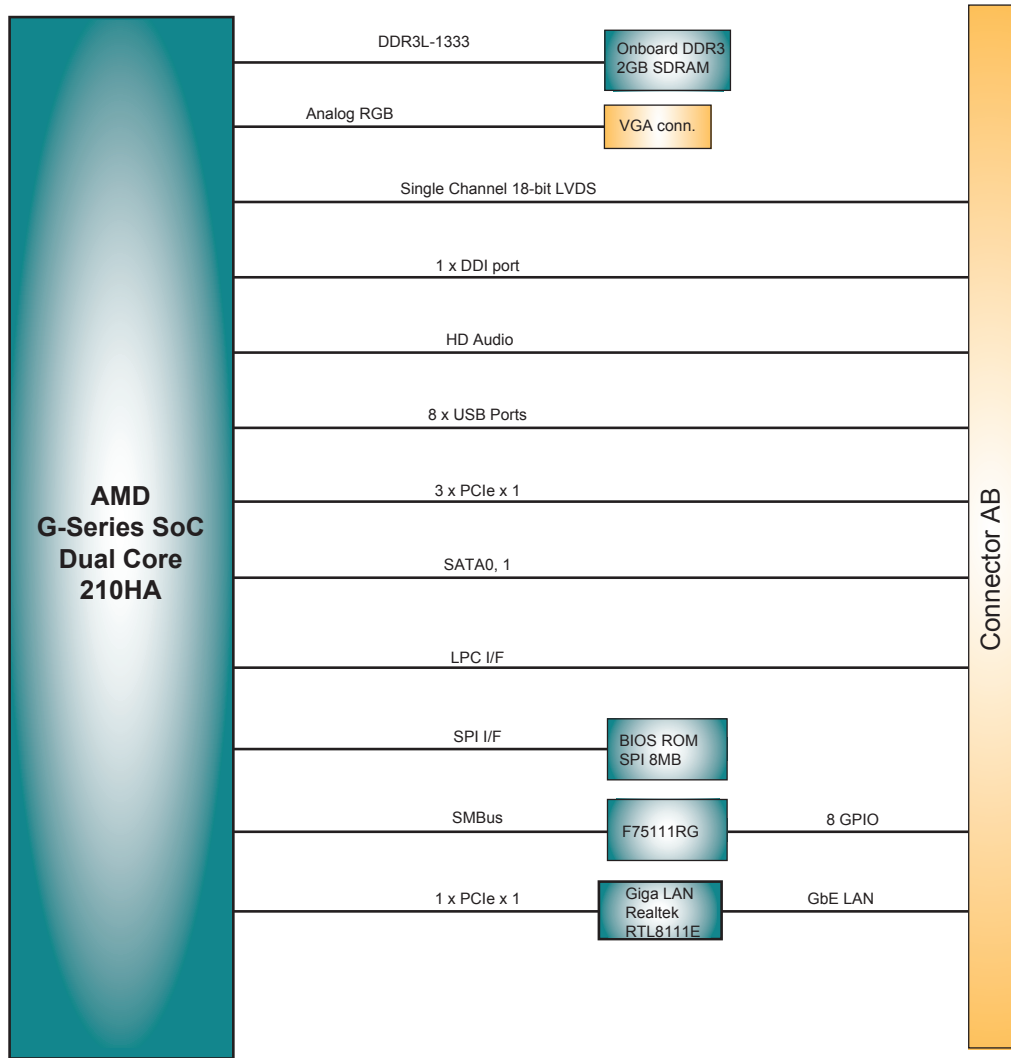

## Ordering Information

<b>EmNANO-a56M0-210HA</b>	COM Express® Mini Type 10 CPU Module with AMD G-Series SoC Dual Core 210HA and 2GB memory soldered on module
<b>HS-56M0-F1</b>	Heat spreader
<b>HS-56M0-C1</b>	Heat spreader with fan
<b>PBN-9007</b>	COM Express® Mini evaluation carrier board (EPIC form factor)
<b>CBK-05-9007-00</b>	Cable Kit 1 x USB cable 1 x serial port cable 1 x SATA cable 1 x SATA power cable 1 x PS/2 cable

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Computer-On-Modules - COM category](#):*

*Click to view products by [Arbor Technology manufacturer](#):*

Other Similar products are found below :

[FP2-BP12](#) [CEM881PG-i7-5650U](#) [t2Express-HL-i5-4402E](#) [38017-0000-00-0](#) [36024-0000-99-1](#) [34099-0000-99-0](#) [36026-0000-99-1](#) [36026-0000-99-0](#) [38017-0000-00-5](#) [36016-4000-19-4](#) [VSTK-6ULL-NFC](#) [Express-SL-i7-6820EQ](#) [W612M3A600SC](#) [24828-107](#) [24571-309](#) [30846-682](#) [ET970K-X3G](#) [UPC-PLUSX5Q-A20-0464](#) [UPC-PLUSX7-A20-08128](#) [UPC-PLUSX5D-A20-0232](#) [UPC-PLUSX7-A20-0864](#) [UPX-WHLCR-A20-04064](#) [cExpress-BL-i5-5350U](#) [cExpress-KL-i3-7100U](#) [Express-BD7-D1539](#) [Express-CF-i3-8100H](#) [Express-CFR-E-2254ML](#) [Express-HLE-i3-4100E](#) [Express-IBR-i7-R-3612QE](#) [LEC-BT4-4G-8G-ER](#) [Q7-BT1-2G-8G-ER](#) [ROM-3310CS-MCA1E](#) [ROM-3310WS-MCA1E](#) [EmNANO-a56M0-210HA](#) [EmQ-i2301-E3825](#) [EmQ-i2301-E3845](#) [EmQ-i2506](#) [G552BE](#) [CEM130-V1202B](#) [CEM700-D1508](#) [conga-QA3E/E3815-2G](#) [eMMC4](#) [ET976-1807LV-4G](#) [ET976-1202-4G](#) [ET976-1605-4G](#) [ET976-1605LV-4G](#) [ET976-1605LV-8G](#) [ET976-1807LV-8G](#) [ET976-1202LV-E4G](#) [RM-N8MMI-Q208I](#) [ICE-BT-T10-E38251-R10](#)