



Series 152FB Fusion-Bonded Cable Jumpers

FEATURES

- Flexible Fusion-bonded Jumpers Plug Directly into PC Boards or Sockets
- Stranded Wire Conductors Fusion-bonded with an Overcoat of Sn for Easy Soldering or Socketing
- Jumpers Shipped with Protective Tabs on Ends to Maintaining Proper Conductor Spacing



GENERAL SPECIFICATIONS

- **INSULATION:** UL VW-1, Style 2651 Polyvinyl Chloride (PVC) with optional Polarization Stripe on one side
- **NOMINAL INSULATION THICKNESS:** 0.009 [0.23]
- **CONDUCTORS:** 26-gauge, 7-strand Cu with Sn fusion-bonded overcoat
- **OPERATING TEMPERATURE:** -4°F to 221°F [-20°C to 105°C]
- **VOLTAGE RATING:** 300Vrms
- **DIELECTRIC WITHSTANDING VOLTAGE:** 1500Vrms
- **INSULATION RESISTANCE:** 10,000 MΩ per 10 feet [3.05 meters]
- **RESISTANCE:** 40.3Ω per 1000 feet [304.8 meters]
- **PROPAGATION DELAY:** 1.3ns/ft.

MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.033 ±0.002 [0.84 ±0.05] dia.

ORDERING INFORMATION

XX-XXXXX-152FB X

Option
P = Polarization Strip, along one edge of cable*

Jumper Series

Cable Length "L" (inches)

2.00" = 002


2.50" = 002.5

2.25" = 002.25

2.125" = 002.125
Etc.

No. of Conductors
4 thru 22

* Aries reserves the right to ship with or without unless specified by customer.

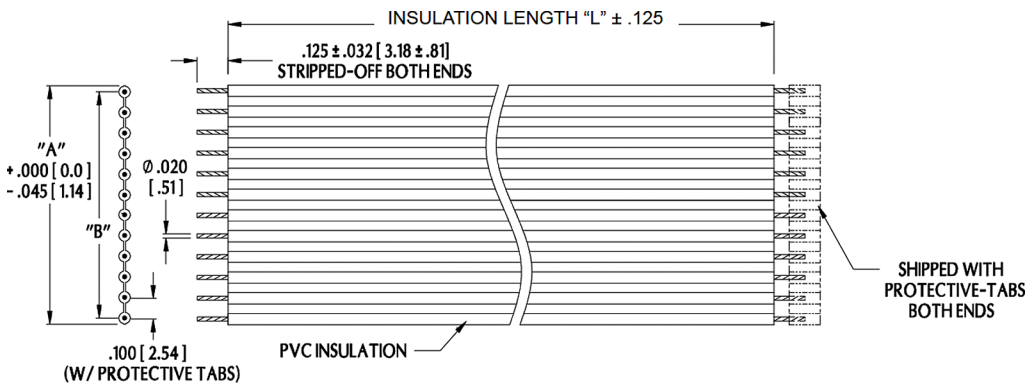

SHIPPED WITH
PROTECTIVE-TABS
BOTH ENDS

# Conductors	Min. Insulation Length
4 thru 8	1.000 [25.40]
9 and 10	1.250 [31.75]
11 thru 22	1.500 [38.10]

"A" (NO. OF CONDUCTORS) x 0.100 [2.54]
"B" (NO. OF CONDUCTORS - 1) x 0.100 [2.54]

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

ALL CABLES SHIP WITH Pb-FREE MATERIAL UNLESS CUSTOMER SPECIFIED WHEN ORDERING

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



ARIES
ELECTRONICS, INC.

2609 Bartram Road • Bristol, PA 19007-6810 USA

TEL 215-781-9956 • FAX 215-781-9845

WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



11001
Rev. 1.5
1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [Aries](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [1213 009U1000](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)

[44A0121-12-996CS2275](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#) [55PC1131-20-029-9](#)

[Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB 0101000](#) [2412 0061000](#) [8342 060100](#) [8740](#)

[060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406 T35100](#) [2413 002A1000](#) [3613](#)

[D151000](#) [1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [1533R 0061000](#) [RIT1000](#) [1533R 006A1000](#)

[9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8340 060100](#) [8333 0601000](#) [1533R 0021000](#) [1583A 012U1000](#)