



# Series 680 Program Header and Cover

## FEATURES


- Complete versatility for programming within the unit itself, thus eliminating the need for DIP switches in many situations.
- Available pre-programmed from Aries, or do-it-yourself using Aries Hand Tool P/N T-680. Consult Data Sheet 22002 for Programming Tool information.
- Available with plain (solid) or "top-slot" press-on covers. Plain covers protect programs while "top-slot" covers allow programming of opposing pins through square openings on top.

## GENERAL SPECIFICATIONS

- STANDARD BODY AND COVER: black UL 94V-0 Glass filled 4/6 Nylon
- PINS: Brass 260 3/4-hard, ASTM B-36
- PIN PLATING: "-T" 50-150 $\mu$  [1.27 $\mu$ ] min. matte Sn per ASTM B545-97(2004) e1 over 50 $\mu$  [1.27 $\mu$ ] min. Ni per SAE AMS-QQ-N-290B; "-TL" 50-150 $\mu$  [1.27 - 3.81 $\mu$ ] min. 60/40 Sn/Pb per SAE AMS-P-81728 over 50 $\mu$  [1.27 $\mu$ ] min. Ni per SAE AMS-QQ-N-290B
- CURRENT RATING: 1 amp
- OPERATING TEMPERATURE: 221°F [105°C]

## MOUNTING CONSIDERATIONS

- SUGGESTED PCB HOLE SIZE: 0.032  $\pm$  0.002 [0.81  $\pm$  0.05] dia.

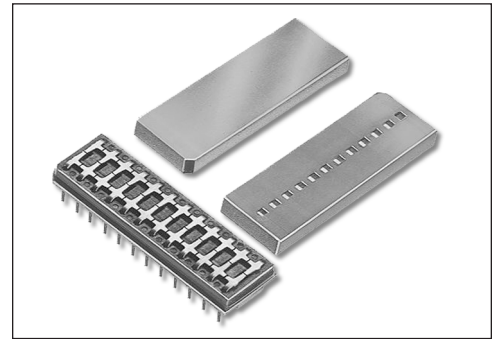


**CUSTOMIZATION:** In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

## ORDERING INFORMATION

**XX-680-19X XX X**

No. of Pins — 4 thru 24  
 Series —  
 Interconnection Styles — see below  
 Optional Top Slot = "C" preassembled to header Style 191 only  
 Plating —  
 T = Sn  
 TL = Sn/Pb

ALL DIMENSIONS: INCHES [MILLIMETERS]  
 ALL TOLERANCES:  $\pm$ 0.005 [0.13] UNLESS OTHERWISE SPECIFIED  
 "A" # PINS PER ROW  $\times$  0.100 [2.54] +0.050 [1.27]  
 "B" (# PINS PER ROW -1)  $\times$  0.100 [2.54]  
 CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

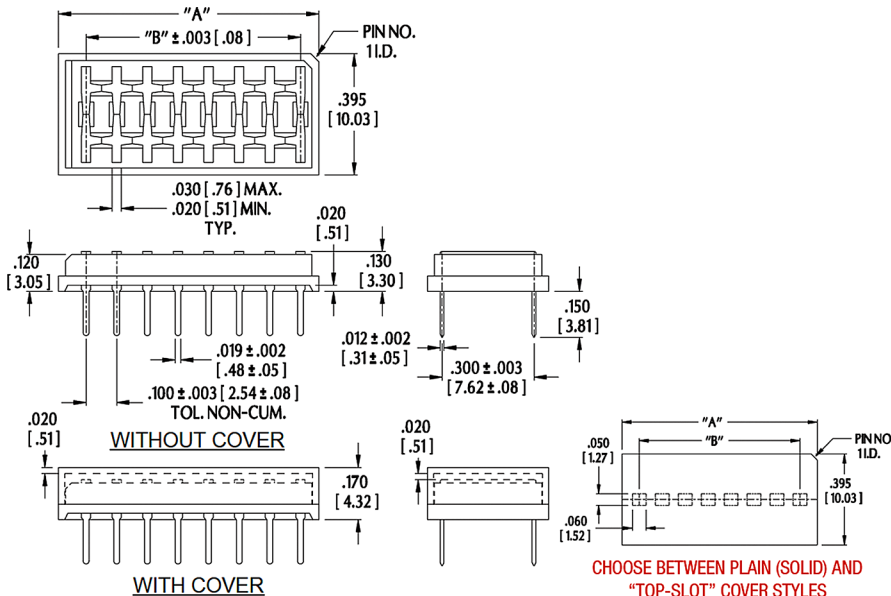

## COVER ORDERING INFORMATION

**XX-68X-10**

No. of Pins — 4 thru 24  
 Cover Series — 655 = Plain, 658 = Top Slot  
 Cover No. —

	<b>STYLE 190</b> All pins interconnected, both adjacent and opposing
	<b>STYLE 191</b> Opposing pins interconnected only.



Bristol, PA 19007-6810 USA  
 TEL (215) 781-9956 • FAX (215) 781-9845  
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IC & Component Sockets](#) category:*

*Click to view products by [Aries](#) manufacturer:*

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)