




# Series 800 Vertisocket™ DIP Socket w/Bifurcated Contacts for Horizontal Mounting

## FEATURES

- Full line of Horizontal Display DIP Sockets for DIP packaging of LEDs, incandescent lamps, DIP switches, test points, etc.
- Variations of Mounting Position and Pin Configuration provide Exceptional Design Freedom
- Restricted Entry for Contact Protection
- Accepts Standard LEDs and Incandescent Displays as well as 0.500 [12.70] and 0.600 [15.24] Tall Displays

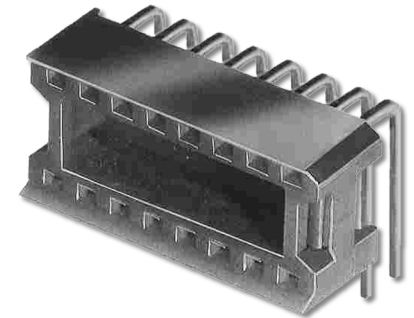

## GENERAL SPECIFICATIONS



- **STANDARD BODY MATERIAL:** black UL 94V-0 4/6 Nylon
- **BIFURCATED CONTACTS:** Grade A spring-tempered Phosphor Bronze per QQ-B-750
- **CONTACT PLATING:** 10µ [0.25µ] min. Au per MIL-G-45204 over 50µ [1.27µ] min. Ni per QQ-N-290 -OR- 200µ min. matte Sn per ASTM B545-97(2004)e1 over 50µ [1.27µ] min. Ni per QQ-N-290 -OR- 200µ [5.08µ] min. bright 90/10 Sn/Pb per MIL-T-10727 Type 1 over 50µ [1.27µ] min. Ni per QQ-N-290
- **SPACER:** Fish paper
- **CONTACT CURRENT RATING:** 1.5 amps
- **OPERATING TEMPERATURE:** 221°F [105°C] Sn & Sn/Pb plating; 257°F [125°C] Au plating
- **INSERTION FORCE:** 110g/pin average
- **WITHDRAWAL FORCE:** 75g/pin average
- **ACCEPTS:** flat leads up to 0.014 [0.36] thick and 0.020 [0.51] wide; round leads up to 0.020 [0.51] dia.
- **ACCEPTS LEAD LENGTHS:** 0.075-0.160 [1.91-4.06]

## MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.044 ±0.002 [1.12 ±0.05] dia.

Consult [Data Sheet 13002](#) for Vertical Mounting Vertisocket™ with bifurcated contacts.

## ORDERING INFORMATION

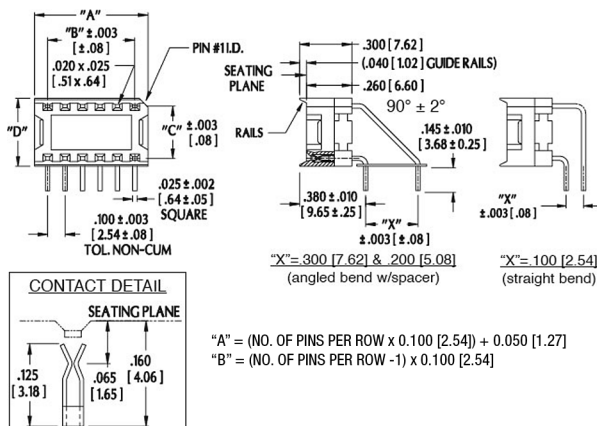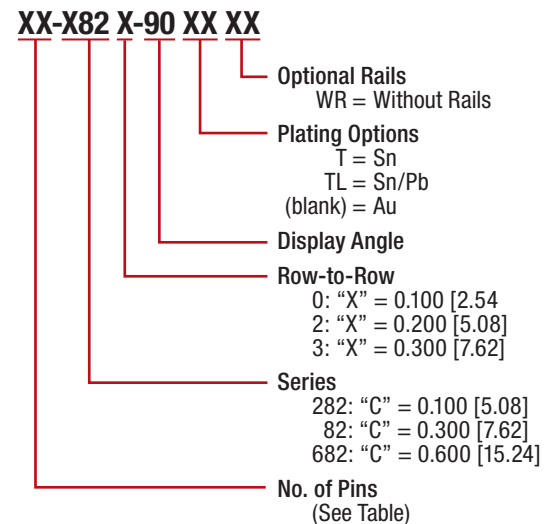

Dim. "D"	Dim. "X"	No. of Pins
0.290 [7.37]	0.100 [2.54]	8, 10
	0.200 [5.08]	
	0.300 [7.62]	
0.390 [9.91]	0.100 [2.54]	8, 14 thru 20
	0.200 [5.08]	
	0.300 [7.62]	
0.690 [17.53]	0.100 [2.54]	8 thru 40, 48
	0.200 [5.08]	
	0.300 [7.62]	

**ALL DIMENSIONS: INCHES [MILLIMETERS]**  
**ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED**  
**FOR VERTICAL MOUNTING, SEE DATA SHEET 13002**  
**CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS**

**CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.**  
**ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE**  
**PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [IC & Component Sockets](#) category:*

*Click to view products by [Aries](#) manufacturer:*

Other Similar products are found below :

[714-43-102-31-012000](#) [0066-3-17-15-30-14-02-0](#) [0134-0-15-15-32-27-04-0](#) [614-DG5](#) [6527-0-00-15-00-00-03-0](#) [670](#) [672](#) [673](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-003101](#) [807-22-001-10-004101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [835-43-014-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-306-41-003000](#) [116-43-308-41-007000](#) [PX-68LCC](#) [PX-84LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-43-636-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [123-43-322-41-801000](#) [123-43-428-41-001000](#) [123-43-624-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#)