

Series LP300 Programmers and Shorting Plugs

FEATURES:

- Shorting plugs mate with any .300 [7.62] center DIP socket to provide custom programming.
- Stacks on .100 [2.54] centers.
- Converts any socket into a DIP switch.

SPECIFICATIONS:

- Standard plug body material is Black UL94-V/0 4/6 Nylon.
- Pins are 3/4 hard Brass.
- Pin plating is 10μ [.25 μ m] min. Gold per MIL-G-45204 over 50 μ [1.27 μ m] min. Nickel per SAE-AMS-QQ-N-290.
- Current rating=2 Amps.
- Operating temperature= -67° to 257°F [-55°C to 125°C]

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances ± .005 [.13] unless otherwise specified






Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

Specify Part No. **LP300** for LO-PRO[®]file plug with Gold plating

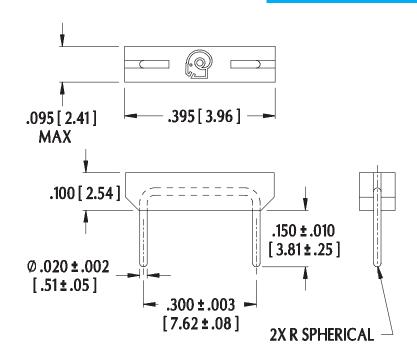



Bristol, PA USA TEL: (215) 781-9956 FAX: (215) 781-9845



PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Aries manufacturer:

Other Similar products are found below :

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-4-0210 01-2606-4-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 2970-BLK 30-443G 1680