

AEE15W-M Series

15 Watts

Data Sheet

Total Power: 15 Watts
Input Voltage: 12 V, 24 V or 48 V
of Outputs: Single, Dual

SPECIAL FEATURES

- 4200 Vac reinforced insulation
- Insulation rated for 300 Vac working voltage
- Medical safety certifications
- 2x MOPP rated
- Wide 2:1 input voltage range
- Low leakage current <5 μ A
- Operating temperature range -40 °C to +85 °C (with derating)
- Input filter meets EN 55022, Class A and FCC, Level A
- Medical EMC Standard meets 4th Edition of EMI EN55011 and EMS EN60601-1-2
- 2"x 1" plastic package
- Three-year product warranty

SAFETY

- EN/IEC 60601-1 3rd Edition, ANSI/AAMI ES60601-1
- 2x MOPP
- CE Mark




Electrical Specifications

Input	
Input range	9 - 18 Vdc; 18 - 36 Vdc; 36 - 75 Vdc
Efficiency	89%
Output	
Voltage tolerance	\pm 1.0%
Line regulation	\pm 0.5%
Load regulation	1.0%
Noise/ripple	150 mV
OCP and S/C protection	150%, Hiccup
Overvoltage protection	110%
Switching frequency	285 KHz
Temperature co-efficient	\pm 0.02/°C
Isolation	
I/O isolation	4200 Vac rms
Insulation resistance	10 Gohm
Insulation capacitance	80 pF

Environmental Specifications

Operating ambient temperature range	-40 °C to +80 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% (non-condensing)
Calculated MTBF	1 Mhrs

Mechanical Drawing

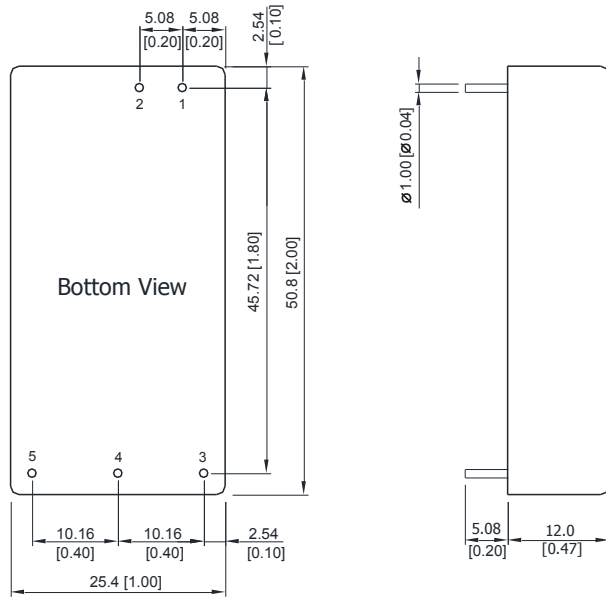

Pin Connectors

Pin No.	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.001)
- Pin diameter 1.0 ±0.5 (0.04±0.002)

Physical Characteristics

Case Size	50.8 x 25.4 x 12 mm (2.0 x 1.0 x 0.47 inches)
Case Material	Non-Conductive Black Plastic (flammability to UL94V-0 rated)
Pin Material	Tinned Copper
Weight	30 g

Ordering Information

Artesyn Part number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
AEE03A12-M	9 - 18 V	5 V @ 3 A		15 W
AEE01B12-M	9 - 18 V	12 V @ 1.25 A		15 W
AEE01C12-M	9 - 18 V	15 V @ 1 A		15 W
AEE01H12-M	9 - 18 V	24 V @ 0.625 A		15 W
AEE01BB12-M	9 - 18 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE01CC12-M	9 - 18 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W
AEE03A24-M	18 - 36 V	5 V @ 3 A		15 W
AEE01B24-M	18 - 36 V	12 V @ 1.25 A		15 W
AEE01C24-M	18 - 36 V	15 V @ 1 A		15 W
AEE01H24-M	18 - 36 V	24 V @ 0.625 A		15 W
AEE01BB24-M	18 - 36 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE01CC24-M	18 - 36 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W
AEE03A48-M	36 - 75 V	5 V @ 3 A		15 W
AEE01B48-M	36 - 75 V	12 V @ 1.25 A		15 W
AEE01C48-M	36 - 75 V	15 V @ 1 A		15 W
AEE01H48-M	36 - 75 V	24 V @ 0.625 A		15 W
AEE01BB48-M	36 - 75 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE01CC48-M	36 - 75 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
An Advanced Energy Company

www.artesyn.com

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)