

ASA 6W-M Series

6 Watts

Data Sheet

Total Power: 6 Watts
Input Voltage: 12 V, 24 V or 48 V
of Outputs: Single, Dual

SPECIAL FEATURES

- 4000 Vac reinforced insulation
- Medical safety to UL/cUL/EN/IEC 60601-1 3rd Edition
- 2 MOOP rated
- Wide 2:1 input voltage range
- Fully regulated output voltage
- Low leakage current
- Operating temperature range -40 °C to +75 °C (with derating)
- Input filter meets EN 55022, class A and FCC, level A
- Overload protection
- 1.25" x 0.8" package
- RoHS compliant
- Three-year product warranty

SAFETY

- cUL/UL60950-1, CSA C22.2 No. 60950-1-03
- UL60601-1, CSA C22.2 No.601-1
- IEC/EN 60950-1, IEC/EN 60601-1 3rd Edition, 2 MOOP
- cUL/UL60950-1 certificate
- UL60601-1 UL certificate



Electrical Specifications

Input	
Input range	9 - 18 Vdc; 18 - 36 Vdc; 36 - 75 Vdc
Efficiency	80%
Output	
Voltage tolerance	±1.0%
Line regulation	±0.5%
Load regulation	1.0%
Noise/ripple	180 mV
OCP and S/C protection	Foldback, auto-cover
Switching frequency	150 KHz
Temperature coefficient	±0.05 /°C
Isolation	
I/O isolation	4000 Vac rms
Insulation resistance	10 Gohm
Insulation capacitance	13 pF

Environmental Specifications


Operating ambient temperature range	-40 °C to +75 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1,000,000 hours

Ordering Information

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
ASA01A12-M	9 - 18 V	5 V @ 1 A		5 W
ASA01B12-M	9 - 18 V	12 V @ 0.5 A		6 W
ASA01BB12-M	9 - 18 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC12-M	9 - 18 V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W
ASA01A24-M	18 - 36 V	5 V @ 1 A		5 W
ASA01B24-M	18 - 36 V	12 V @ 0.5 A		6 W
ASA01BB24-M	18 - 36 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC24-M	18 - 36 V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W
ASA01A48-M	36 - 75 V	5 V @ 1 A		5 W
ASA01B48-M	36 - 75 V	12 V @ 0.5 A		6 W
ASA01BB48-M	36 - 75 V	12 V @ 0.25 A	-12 V @ 0.25 A	6 W
ASA01CC48-M	36 - 75V	15 V @ 0.2 A	-15 V @ 0.2 A	6 W

Please contact Artesyn Embedded Power for information on other output voltages, power ranges and configurations.

Mechanical Drawing

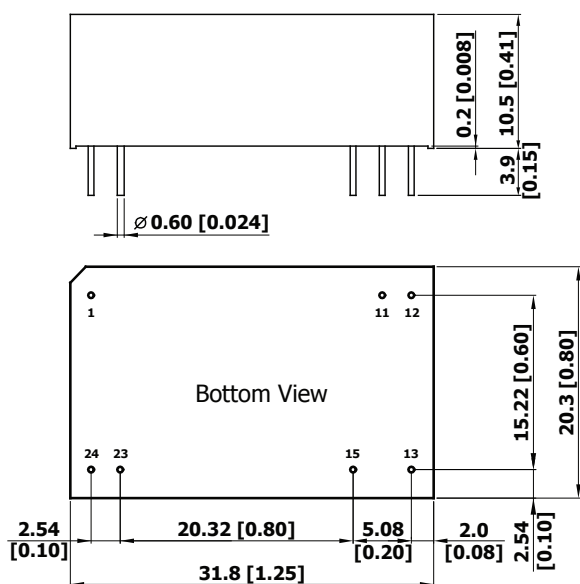

All dimensions in mm (inches)
 Tolerance: X.X±0.25 (X.XX±0.01)
 X.XX±0.13 (X.XXX±0.005)
 Pin pitch tolerance: ±0.25 (±0.01)
 Pin dimension tolerance: ±0.1 (±0.004)

Physical Characteristics	
Case Size	31.8 x 20.3 x 12 mm (1.25 x 0.8 x 0.47 inches)
Case Material	Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Weight	18 g

Pin Connectors		
Pin Number	Single Output	Dual Output
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
 Suite B100
 Tempe, AZ 85282, USA
 +1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
 4 Harbour Buildings, Waterfront West
 Brierley Hill, West Midlands
 DY5 1LN, UK
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333

ARTESYN[™]
 An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
 For support: productsupport.ep@artesyn.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)